
CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

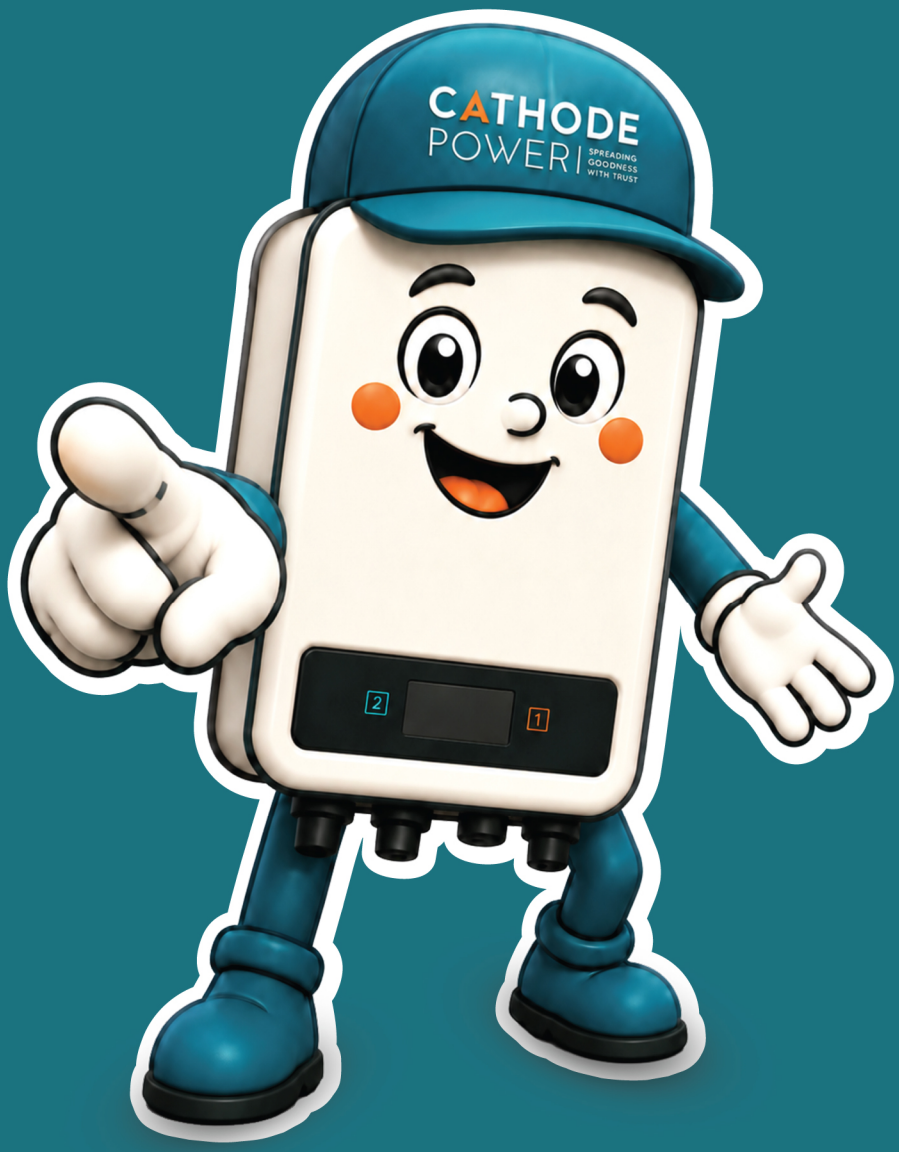


CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS


WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

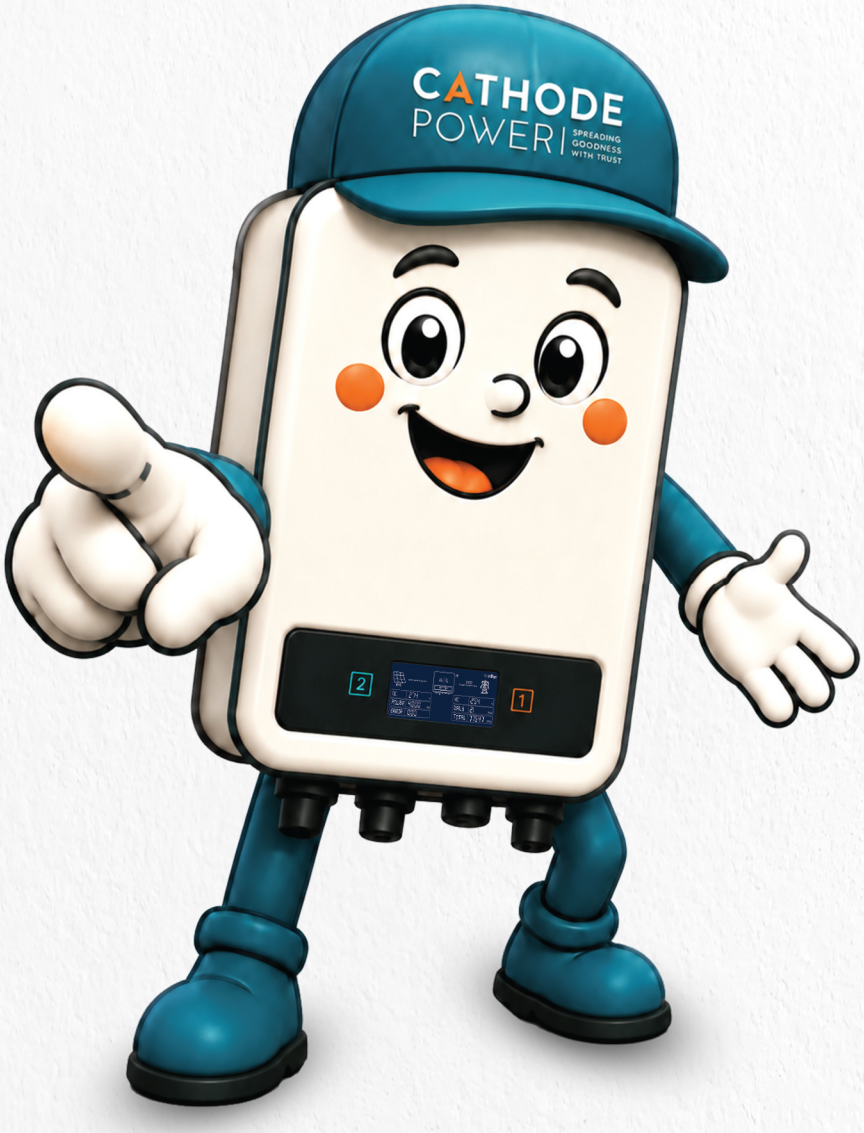

THREE PHASE
HYBRID INVERTERS

8kW | 10kW | 12kW | 15kW

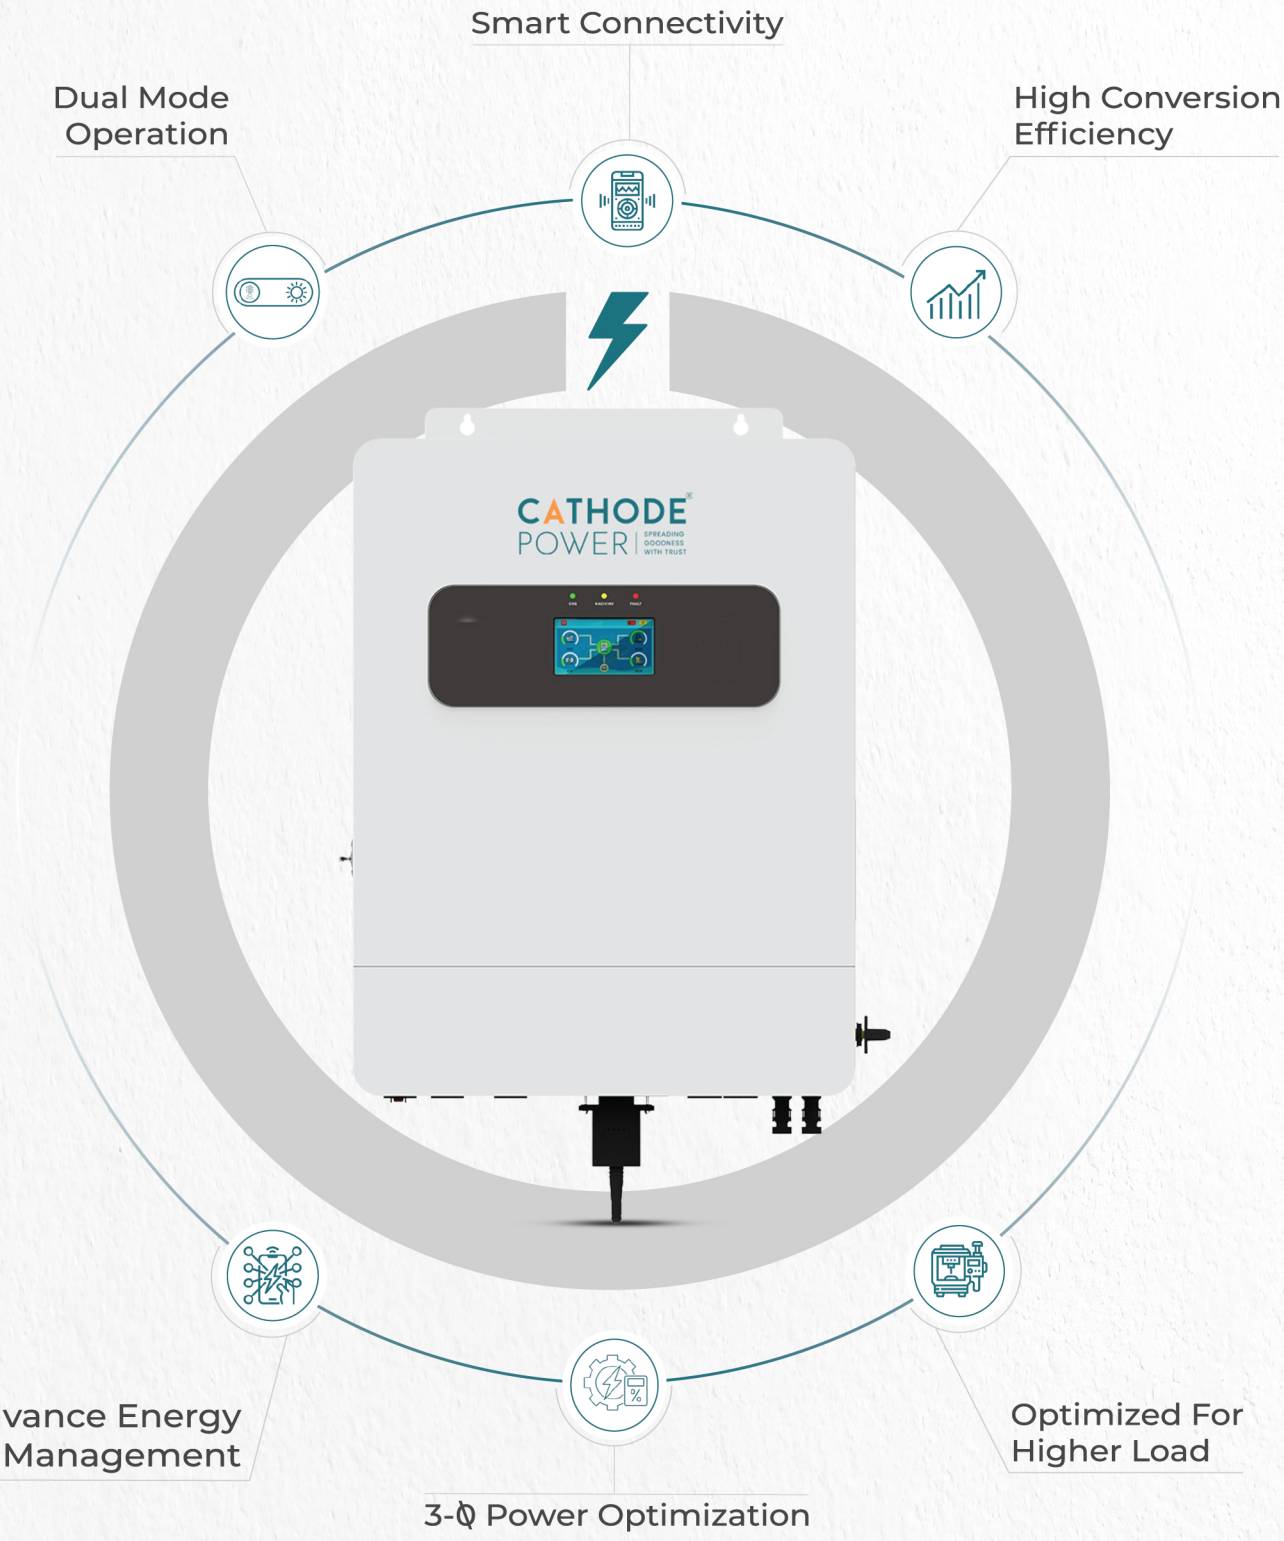


TECHNICAL DATA
(CP-8.0-HYBD TO CP-15-HYBD)

MODEL NO.	CP-8.0-HYBD	CP-10-HYBD	CP-12-HYBD	CP-15-HYBD
PV (DC)				
Max. PV Input Power (Per MPPT)	17000W	21000W	18000W	31000W
Max. PV Input Voltage	1000V			
PV Input Starting Voltage	120V			
MPPT Full Load Voltage Range	300V ~ 850V	245V ~ 850V	295V ~ 850V	272V ~ 850V
MPPT Input Voltage Range	120V ~ 850V			
PV Max. Input Current	15A+15A	30A+15A		30A+30A
MPPT Short-Circuit Current	17A/17A	34A/17A		34A/34A
No. of MPPT	2			
No. of Strings Per MPPT	1+1	2+1		2+2
Battery (DC)				
Max. Charge / Discharge Power	8500W	10500W	12500W	15500W
Battery Voltage Range	40V ~ 60V			
Max. Charge / Discharge Current	180A	220A	250A	280A
Charging Mode	3-Section Type/Equilibrium/Self-adaption BMS			
Battery Type	Lead acid/Lithium Batteries/Gel Batteries			
AC Output				
Rated Output Voltage	220/380V, 230/400V			
Grid Voltage Range	Local Grid Standard Mode/Custom Mode: 220-400V (Configurable)			
Output Frequency Range	50Hz, Intelligent Adaptive/Settable			
Max. Output Current	13.5A	16.7A	19.9A	24.7A
Rated Grid-Connected Current	12.9A/12.3A	15.9A/15.2A	18.9A/18.1A	23.5A/22.5A
Rated Grid-Connected Power	8500W	10500W	12500W	15500W
Max. Grid-Connected Viewing Power	8925W	11025W	13125W	16275W
Max. Grid-Connected Active Power	8925W	11025W	13125W	16275W
DC Component	<0.5% In (Rated Current)			
Grid Type	Three Phase, 3L+N+PE / 3L+PE (Adjustable)			
Output Power Factor	>.99@Rated Power (Adjustable 0.8 Leading~0.8Lagging)			
THDi	<3%			
THDu	<2% (Linear Load)			
Transfer Time	10ms (Typical Value)			
Off-Grid Overload Capability	100%-110% 3min, 110%-125% 1min, >125% 10s			
Efficiency				
Max. Efficiency	97.6%			
Max. European Efficiency	96.5%			
Max. MPPT Efficiency	99.9%			
Protection				
Integrated Protection	Over/Under Volt, Over/Under Freq Prot, AC Out SC/OL Prot, Anti-Island Prot, Batt Chg/Dchg OC Prot, Leakage Curr Prot, Insul Imped Prot, Grd Fault Prot, PV Rev Conn Alarm			
Surge Protection	DC Type II, AC Type I+II			
Display & Communication				
Display	Touchscreen + LED			
Communication	Standard: RS485/CAN/DRM | Optional: 4G/WIFI/GPRS			
General Data				
Noise	<55dB			
Dimension (LxWxH) (mm)	474/246/835mm			
Weight	38kg	40kg		47kg
Operating Temperature Range	-25° - 60°C (Greater than 45°C Derating)			
Humidity	0-100%			
Altitude	4000m (>2000m derating)			
Cooling	Intelligent Forced Air Cooling			
Installation Style	Wall Mounted			
Protection Rating	IP66			
Warranty	5 Years Warranty			

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

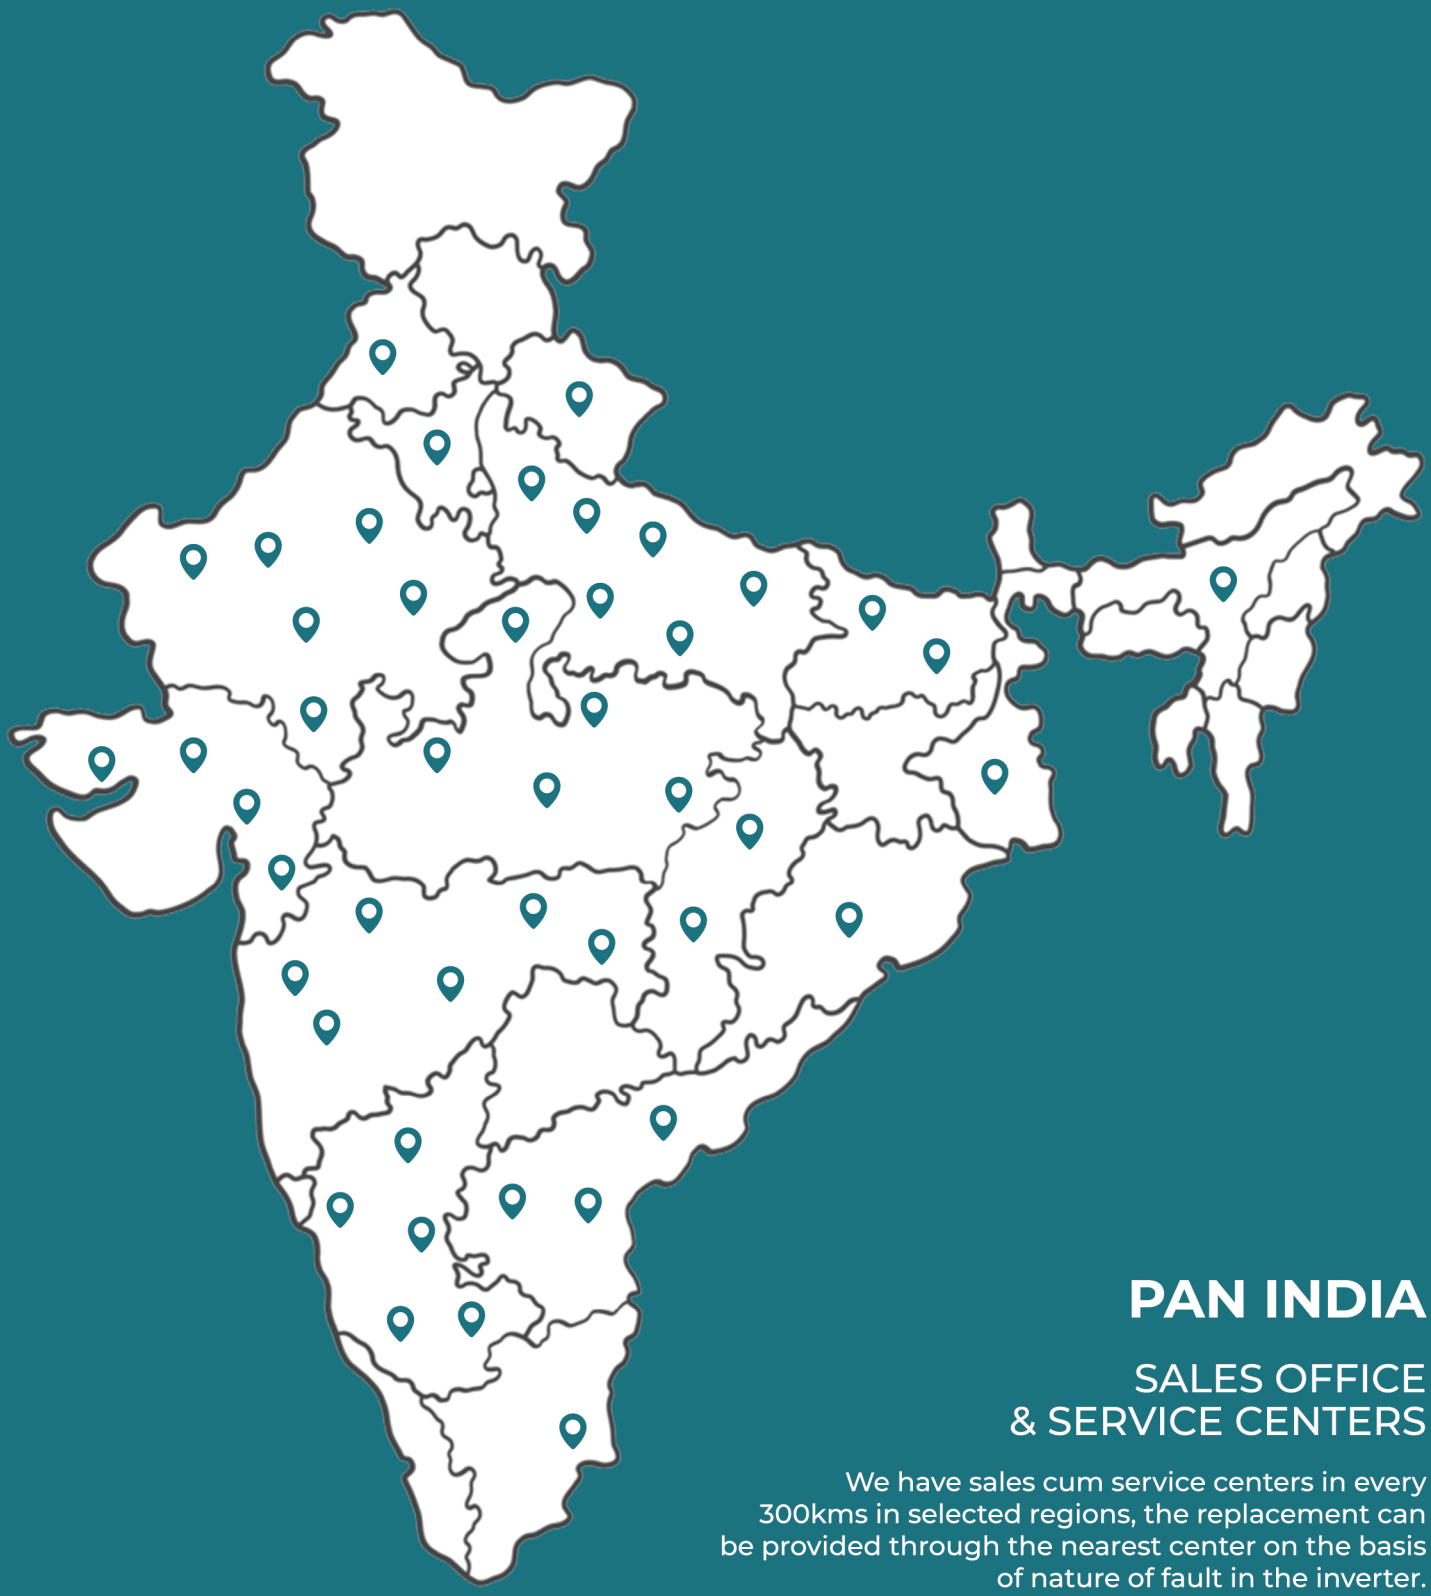

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE® POWER

SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com