
CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

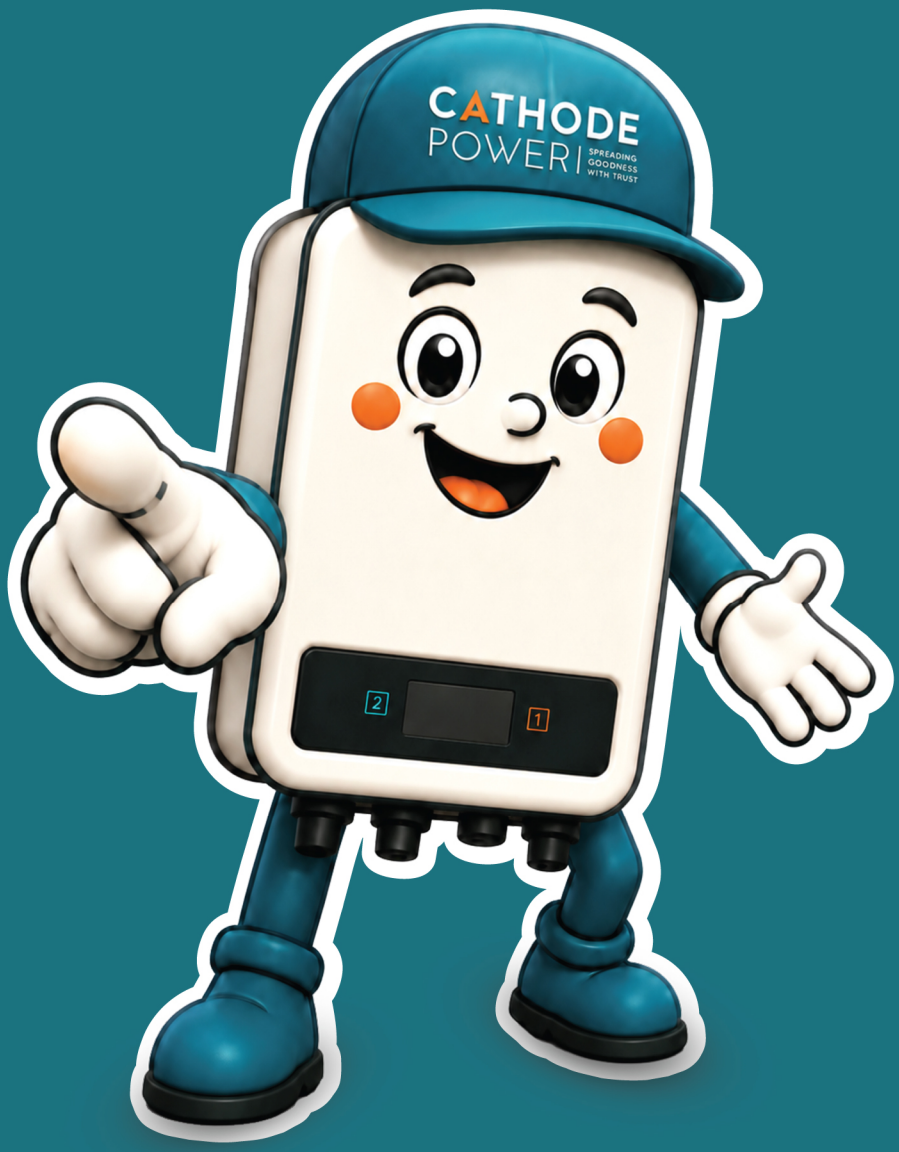


CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS


WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

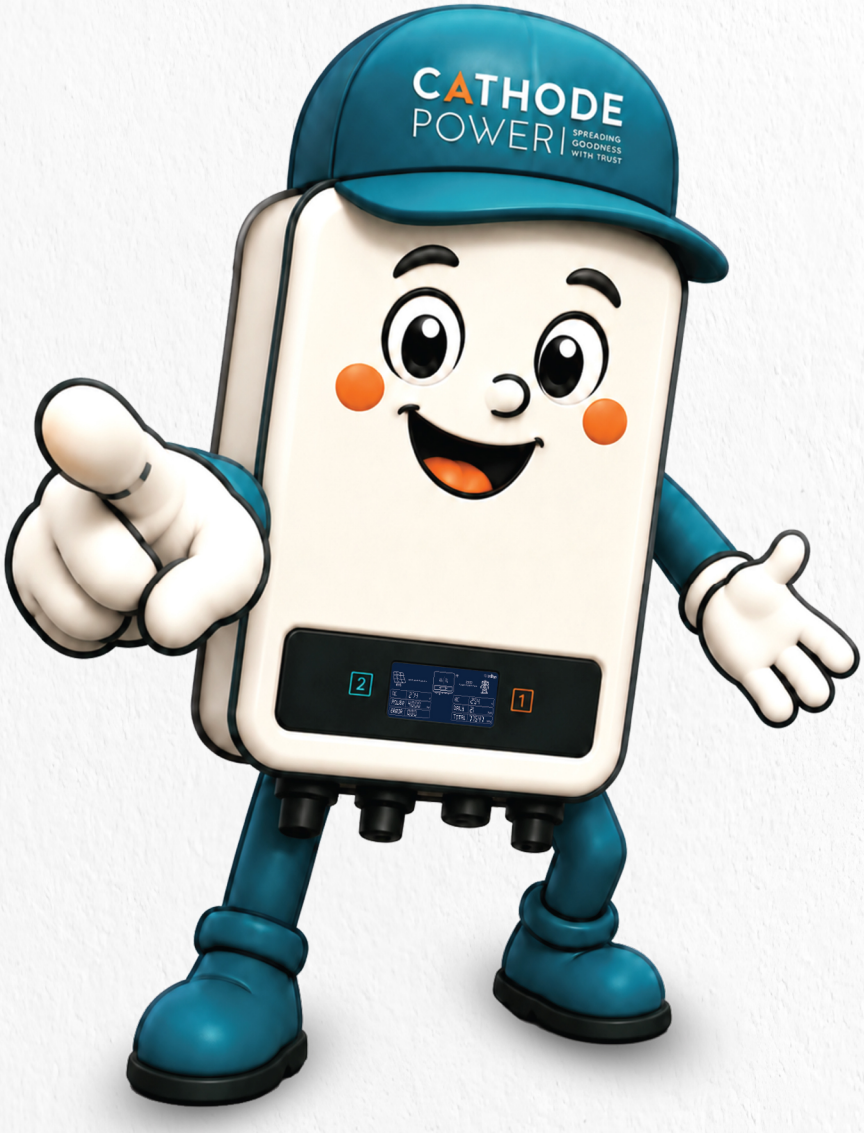

THREE PHASE
SOLAR GTI (DUAL MPPT)

18 kW | 20 kW | 25 kW

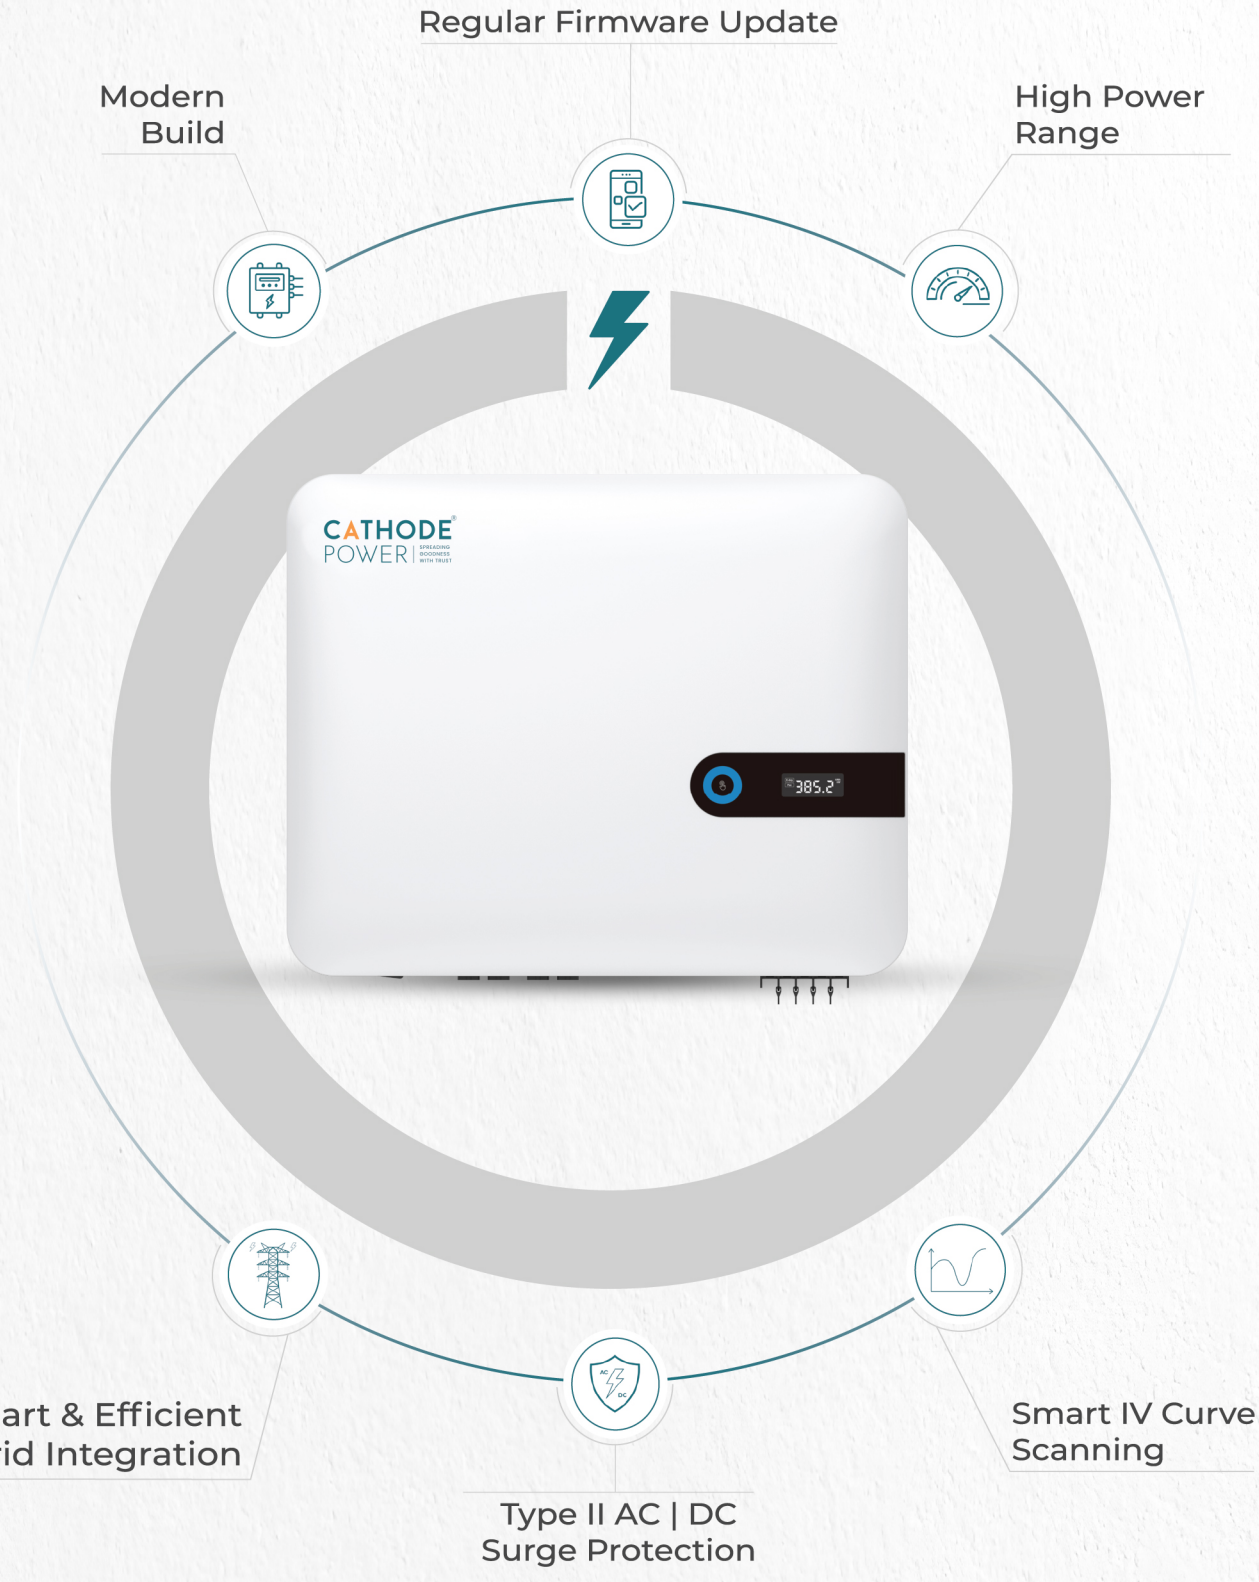


CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-18HL TO CP-25HL)

MODEL NO.	CP-18HL	CP-20HL	CP-25HL
DC Side | Input Parameters			
Max. Input Power	21.6kWp	24kWp	30kWp
Max. P.V. Power (Per MPPT)	11kWp	12kWp	15kWp
Max. DC Voltage		1000V	
Start-up Voltage		180V	
Nominal Voltage		600V	
MPPT Voltage Range		160V - 900V	
No. of MPP Trackers		2	
No. of PV Strings Per MPP Tracker		2	
Max. Input Current Per MPP Tracker		32A	
Max. Input Short-Circuit Current Per MPPT		40A	
AC Side | Output Parameters			
AC Nominal Output Power	18kW	20kW	25kW
Max. AC Apparent Power	19.8kVA	22kVA	27.5kVA
Nominal AC Voltage L-N / L-L (Range*)		230V / 400V (290V - 490V)	
AC Grid Frequency (Range*)		50Hz (45Hz - 55Hz)	
Max. Output Current (PF=0.9)	29A	33.4A	39.9A
Adjustable Power Factor		>0.99 , 0.8 Leading To 0.8 Lagging	
THDi		<3%	
AC Grid Connection Type		3L/N/PE or 3L/PE	
Efficiency			
Maximum Efficiency		98.5%	
European Efficiency		98.1%	
MPPT Efficiency		99.9%	
Safety & Protection			
Anti-Flow Protection		YES	
DC Switch		YES	
DC Reserve Polarity Protection		YES	
AC/DC Surge Protection		TYPE I + II / TYPE II	
Insulation Resistance Monitoring		YES	
AC Short - Circuit Protection		YES	
Grid Monitoring		YES	
Anti - islanding Protection		YES	
Residual - Current Monitoring Unit (GFCI)		YES	
String Fault Monitoring		YES	
AFCI Protection		OPTIONAL	
Anti PID Function		YES	
General Parameters			
Noise		<50 dB	
Dimension (LxWxH) (mm)		520/420/242mm	
Weight		27kg	
Operating Temperature Range		-25°C To 60°C (>45°C Derating)	
Relative Humidity		0-100%	
Altitude		4000m (> 3000m Derating)	
Self-Consumption At Night		<4W	
Topology		Non-Isolated/Transformerless	
Cooling		Intelligent Air Cooling	
Protection Degree		IP65	
DC Connection		H4/MC4 (Optional)	
AC Connection		Lug Connector	
Warranty		10 Years	
Display		Led / Touch	
Communication		Host: RS 485 + USB Optional: 4G/WI-FI	

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

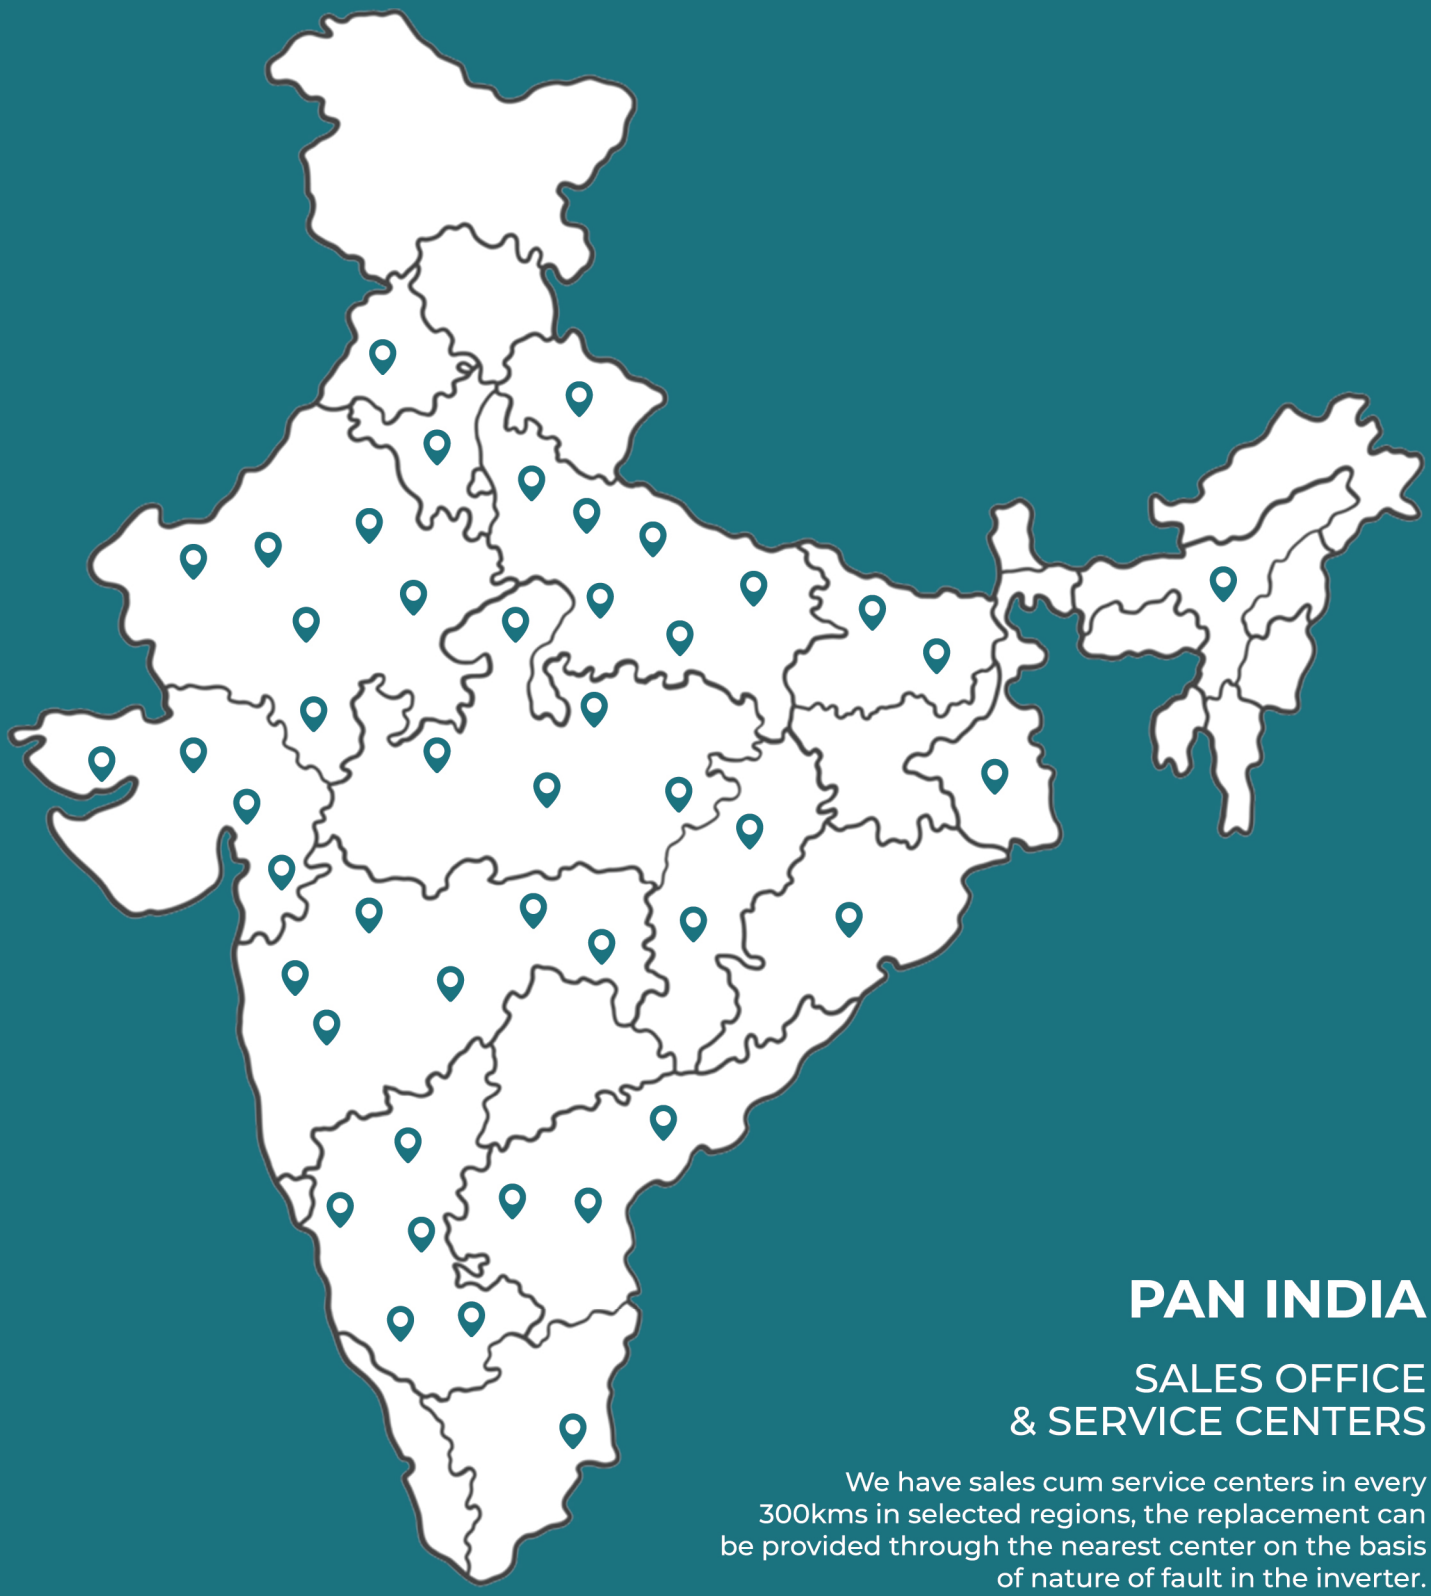

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE® POWER

SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com