
CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

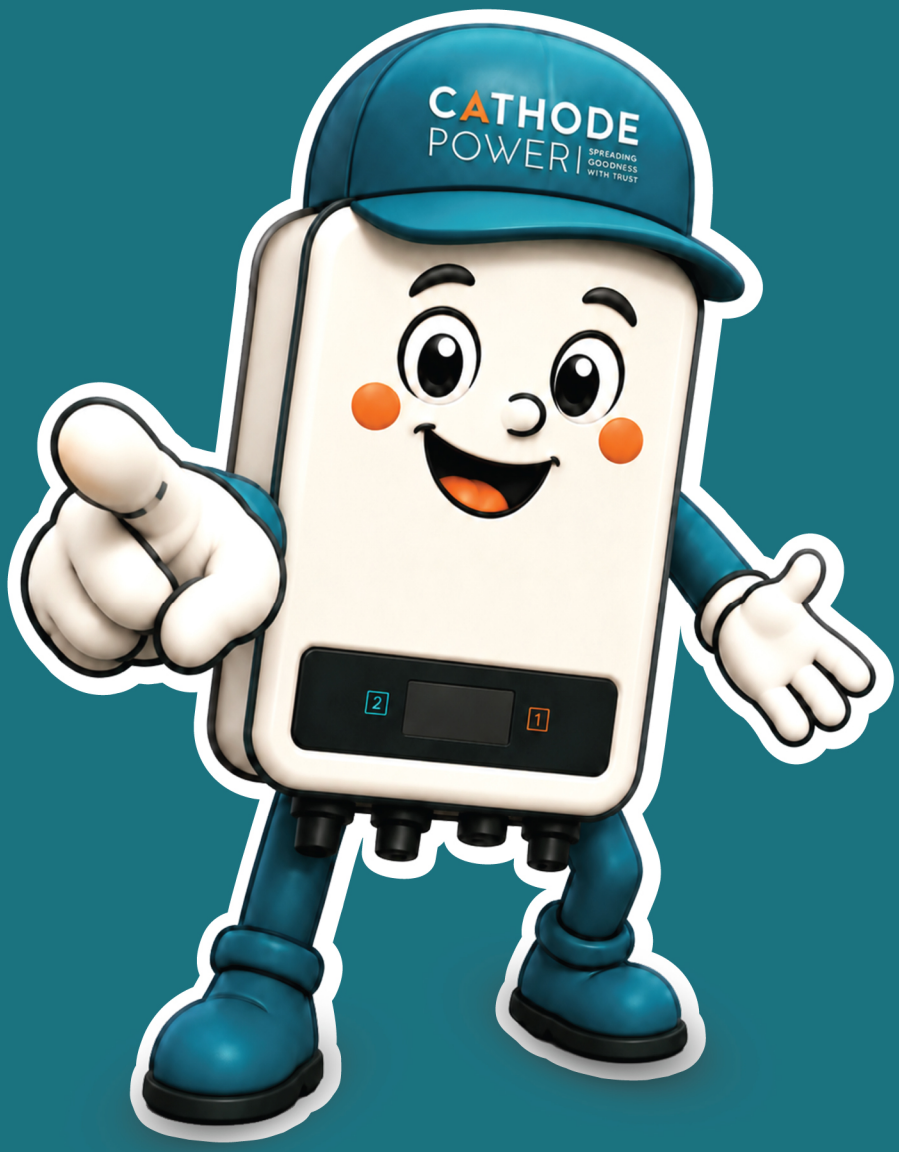


CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS

WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

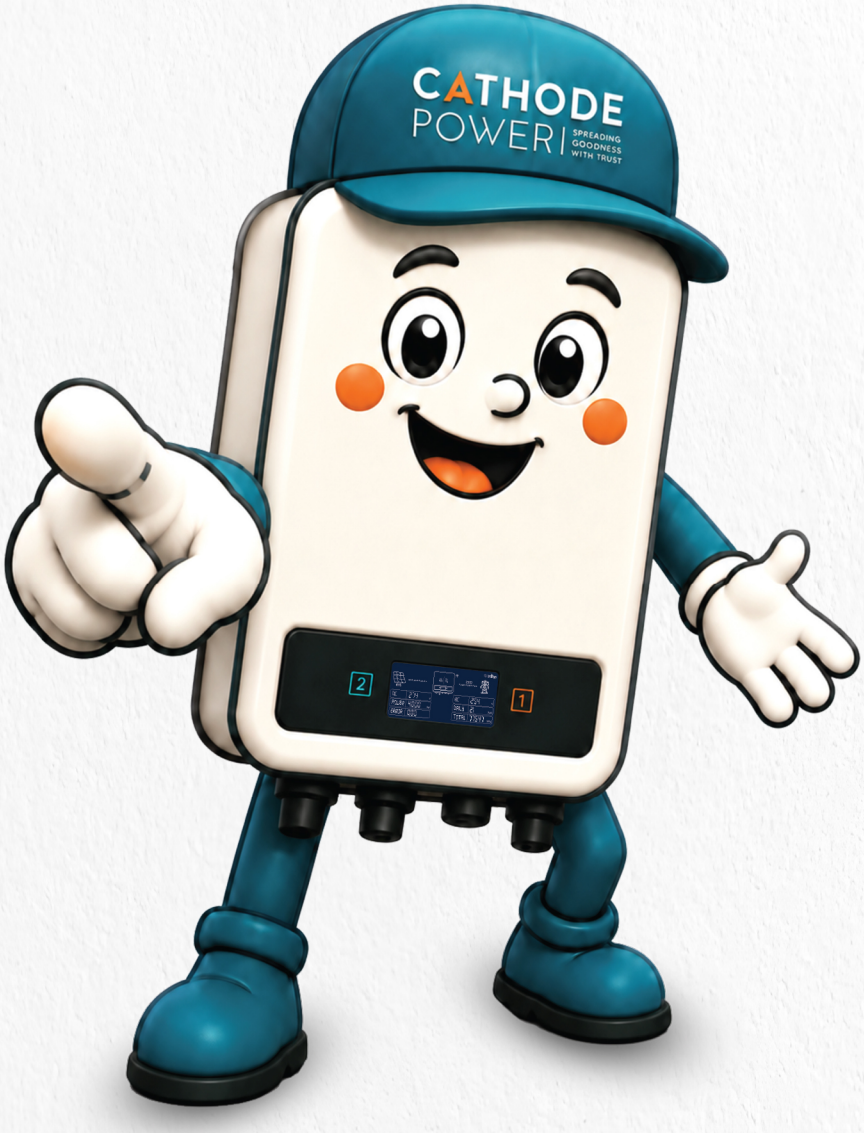

THREE PHASE
SOLAR GTI

80 kW | 100 kW | 110 kW



CATHODE POWER | SPREADING GOODNESS WITH TRUST


TECHNICAL DATA
(CP80HL TO CP110HL)

MODEL NO.	CP80HL	CP100HL	CP110HL
DC Side | Input Parameters			
Max. Input Power	120kWp	150kWp	165kWp
Max. P.V. Power (Per MPPT)	13kWp	17kWp	18kWp
Max. DC Voltage		1100V	
Start-up Voltage		180V	
Nominal Voltage		600V	
MPPT Voltage Range		200V - 1000V	
No. of MPP Trackers		9	
No. of PV Strings Per MPP Tracker		2	
Max. Input Current Per MPP Tracker		32A	
Max. Input Short-Circuit Current Per MPPT		40A	
AC Side | Output Parameters			
AC Nominal Output Power	80kW	100kW	110kW
Max. AC Apparent Power	88kVA	110kVA	121kVA
Nominal AC Voltage L-N / L-L (Range*)		230V - 400V (290V - 490V)	
AC Grid Frequency (Range*)		50Hz (45Hz - 55Hz)	
Max. Output Current (PF=0.9)	128A	159.4A	175A
Adjustable Power Factor		>0.99, 0.8 Leading To 0.8 Lagging	
THDi		<3%	
AC Grid Connection Type		3L/N/PE or 3L/PE	
Efficiency			
Maximum Efficiency		98.5%	
European Efficiency		98.1%	
MPPT Efficiency		99.9%	
Safety & Protection			
Anti-Flow Protection		OPTIONAL	
DC Switch		YES	
DC Reserve Polarity Protection		YES	
AC/DC Surge Protection		TYPE I + II / TYPE II	
Insulation Resistance Monitoring		YES	
AC Short-Circuit Protection		YES	
Grid Monitoring		YES	
Anti-islanding Protection		YES	
Residual-Current Monitoring Unit (GFCI)		YES	
String Fault Monitoring		YES	
AFCI Protection		OPTIONAL	
Anti PID Function		YES	
General Parameters			
Noise		<50dB	
Dimension (LxWxH) (mm)		1040/700/350mm	
Weight (Kg)		88kg	
Operating Temperature Range		-25°C To +60°C (>45°C Derating)	
Relative Humidity		0-100%	
Altitude		4000m (>3000m Derating)	
Self-Consumption At Night		<4w	
Topology		Non-Isolated/Transformerless	
Cooling		Intelligent Air Cooling	
Protection Degree		IP66	
DC Connection		H4 / MC4 (Optional)	
AC Connection		Lug Connector	
Warranty		10 Years	
Display		LED	
Communication Interface		Yes: RS 485/USB/Bluetooth, Optional: 4G/WI-FI	

Version : 3.2 (w.e.f - 01/10/2026)

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

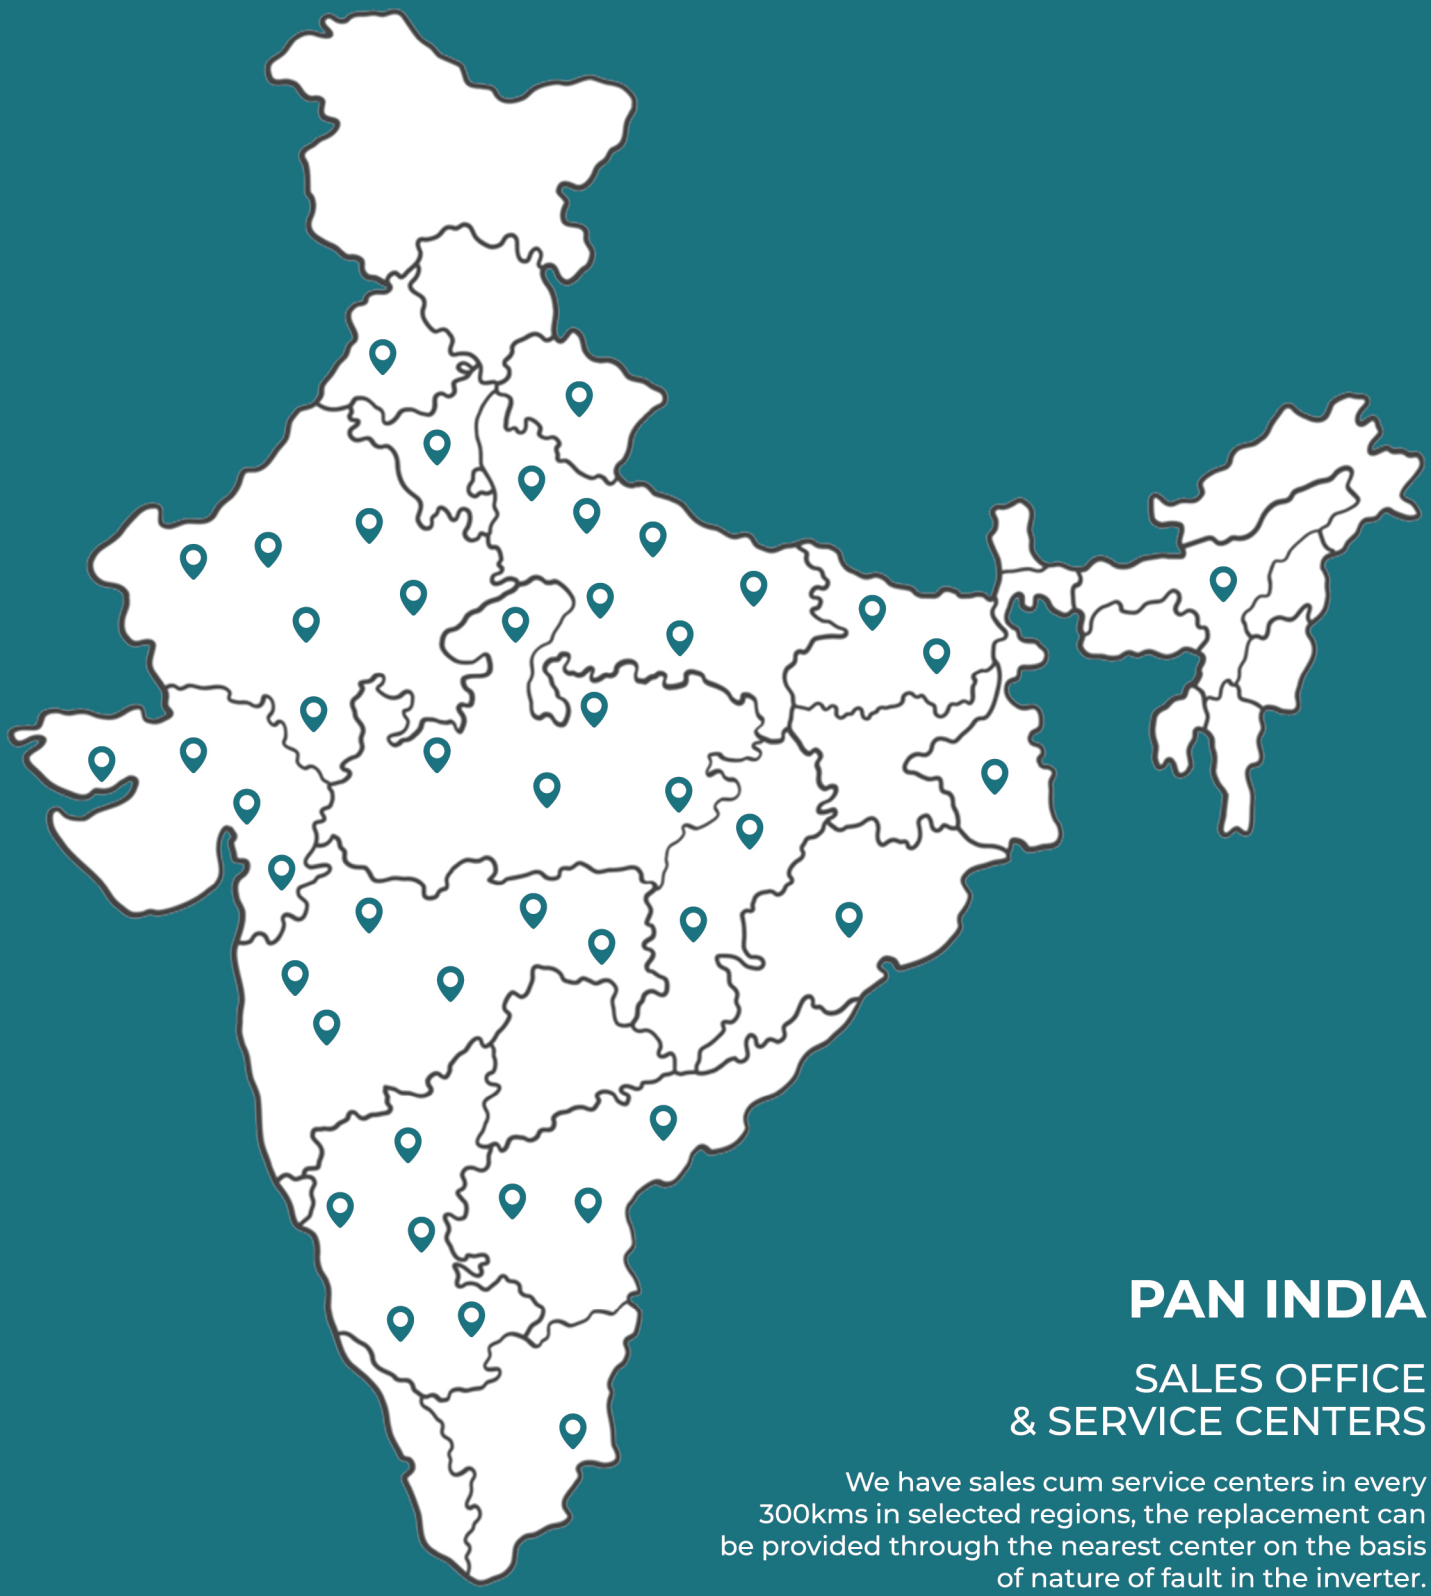

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE® POWER

SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com