
CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

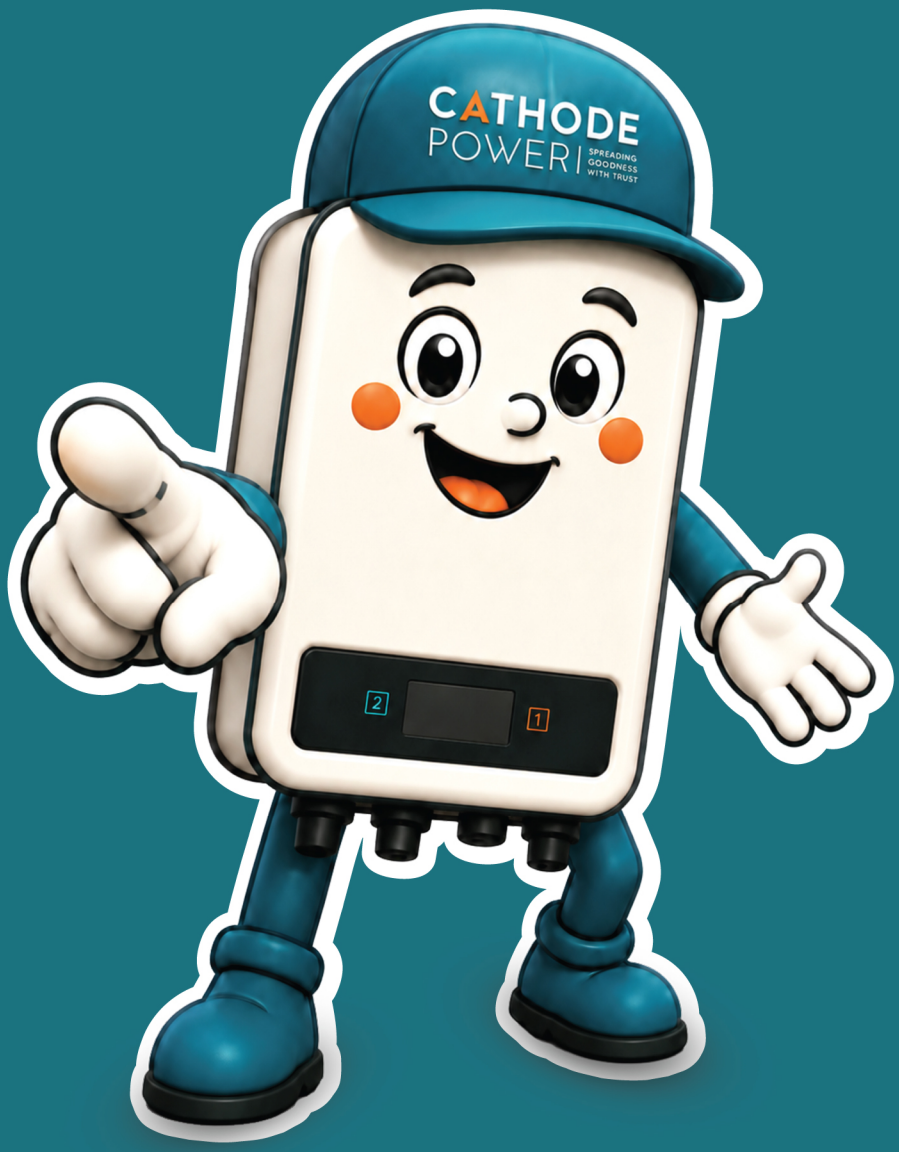


CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS

WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

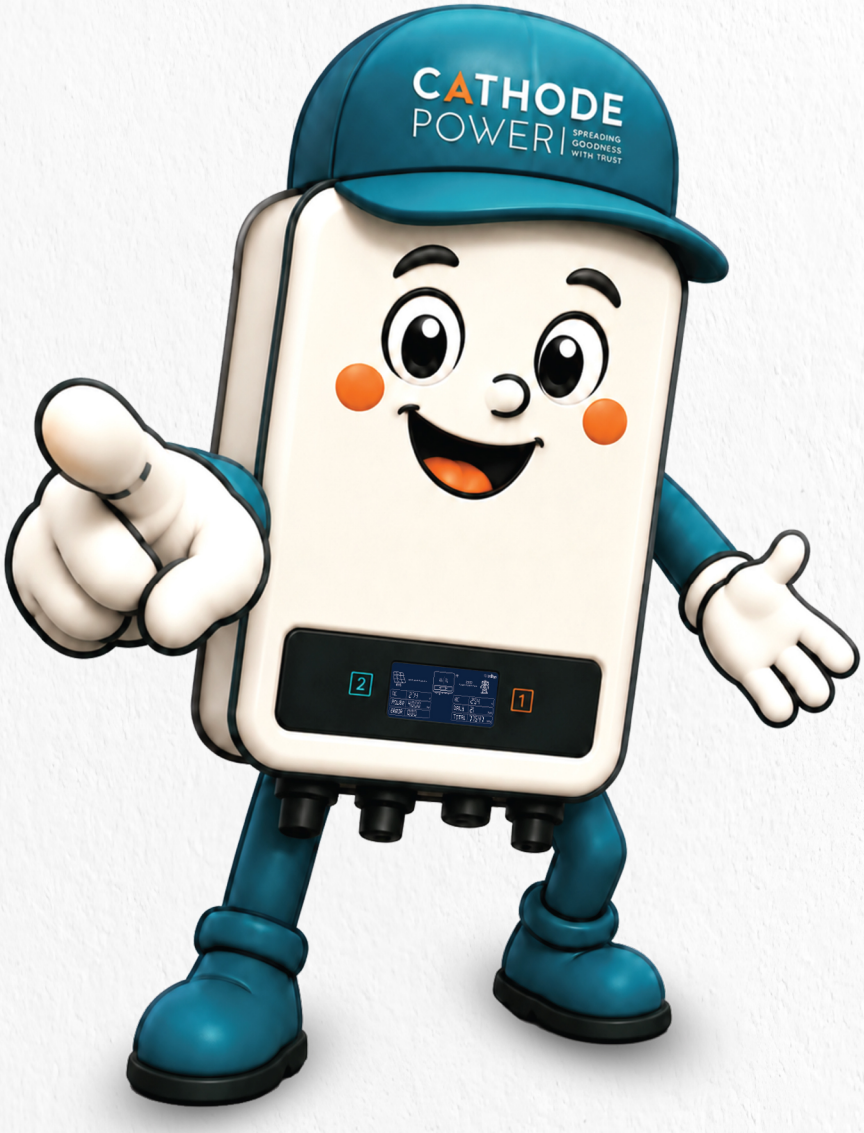

THREE PHASE
SOLAR GTI (DUAL MPPT)

4 kW | 5 kW | 6 kW | 8 kW | 10 kW | 12 kW | 15 kW




CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-04HL TO CP-15HL)

MODEL NO.	CP-04HL	CP-05HL	CP-06HL	CP-08HL	CP-10HL	CP-12HL	CP-15HL
DC Side | Input Parameters							
Max. Input Power	4.8kWp	6kWp	7.2kWp	9.6kWp	12kWp	14.4kWp	18kWp
Max. P.V. Power (Per MPPT)	3kWp	4kWp	5kWp	6kWp	7kWp	8kWp	10kWp
Max. DC Voltage	1000V						
Start-up Voltage	180V						
Nominal Voltage	600V						
MPPT Voltage Range	160V - 900V						
No. of MPP Trackers	2						
No. of PV Strings Per MPP Tracker	1/1					1/2	
Max. Input Current Per MPP Tracker	16A / 16A					16A / 32A	
Max. Input Short-Circuit Current Per MPPT	20A / 20A					20A / 40A	
AC Side | Output Parameters							
AC Nominal Output Power	4kW	5kW	6kW	8kW	10kW	12kW	15kW
Max. AC Apparent Power	4.4kVA	5.5kVA	6.6kVA	8.8kVA	11kVA	13.2kVA	16.5kVA
Nominal AC Voltage L-N / L-L (Range*)	230V / 400V (290V - 490V)						
AC Grid Frequency (Range*)	50Hz (45Hz - 55Hz)						
Max. Output Current (PF=0.9)	6.4A	8.0A	9.6A	12.8A	15.9A	19.1A	23.9A
Adjustable Power Factor	>0.99, 0.8 Leading To 0.8 Lagging						
THDi	<3%						
AC Grid Connection Type	3L/N/PE or 3L/PE						
Efficiency							
Maximum Conversion Efficiency	98.40%			98.50%		98.60%	
European Efficiency	97.50%			98.00%		98.10%	
MPPT Efficiency	99.90%			99.90%		99.90%	
Safety & Protection							
Anti Flow Protection	OPTIONAL						
DC Switch	YES						
DC Reserve Polarity Protection	YES						
AC/DC Surge Protection	TYPE I + II / TYPE II						
Insulation Resistance Monitoring	YES						
AC Short-Circuit Protection	YES						
Grid Monitoring	YES						
Anti-islanding Protection	YES						
Residual-Current Monitoring Unit (GFCI)	YES						
String Fault Monitoring	OPTIONAL						
AFCI Protection	OPTIONAL						
Anti PID Function	YES						
General Parameters							
Noise	<35dB						<50 dB
Dimension (L/W/H) (mm)	440x370x140mm			440x370x186mm		440x370x186mm	
Weight	13kg			16kg		17kg	
Operating Temperature Range	-25°C To 60°C (Greater Than 45°C Derating)						
Relative Humidity	0-100%						
Altitude	4000m (> 2000m Derating)						
Self-Consumption At Night	<1W						
Topology	Transformerless						
Cooling	Natural Convection						Smart Cooling Fan
Protection Degree	IP66						
DC Connection	H4/MC4 (Optional)						
AC Connection	Connector						
Warranty	10 Years						
Display	Led / Touch						
Communication	Host: RS 485 + USB Optional: 4G/WI-FI						

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

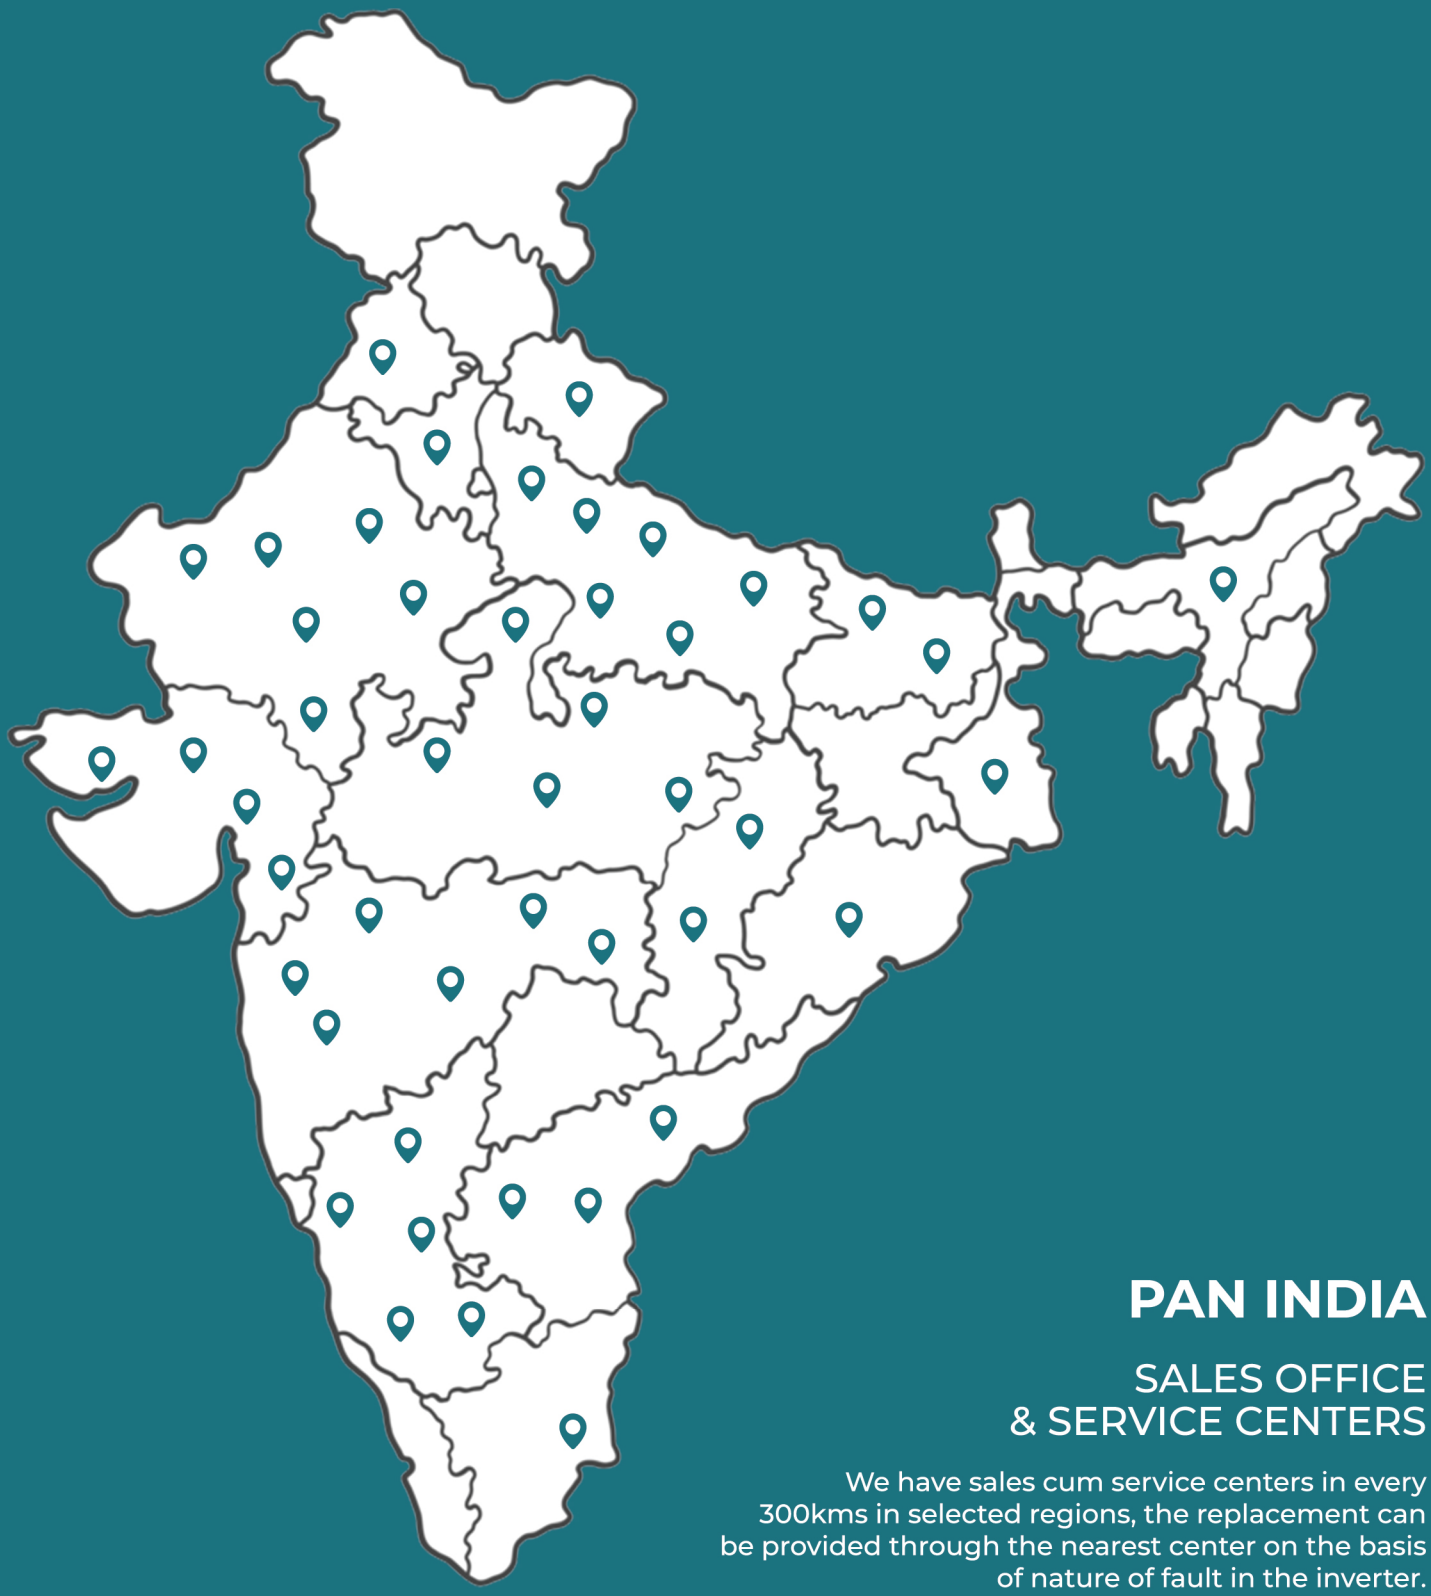

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE® POWER

SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com