
CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

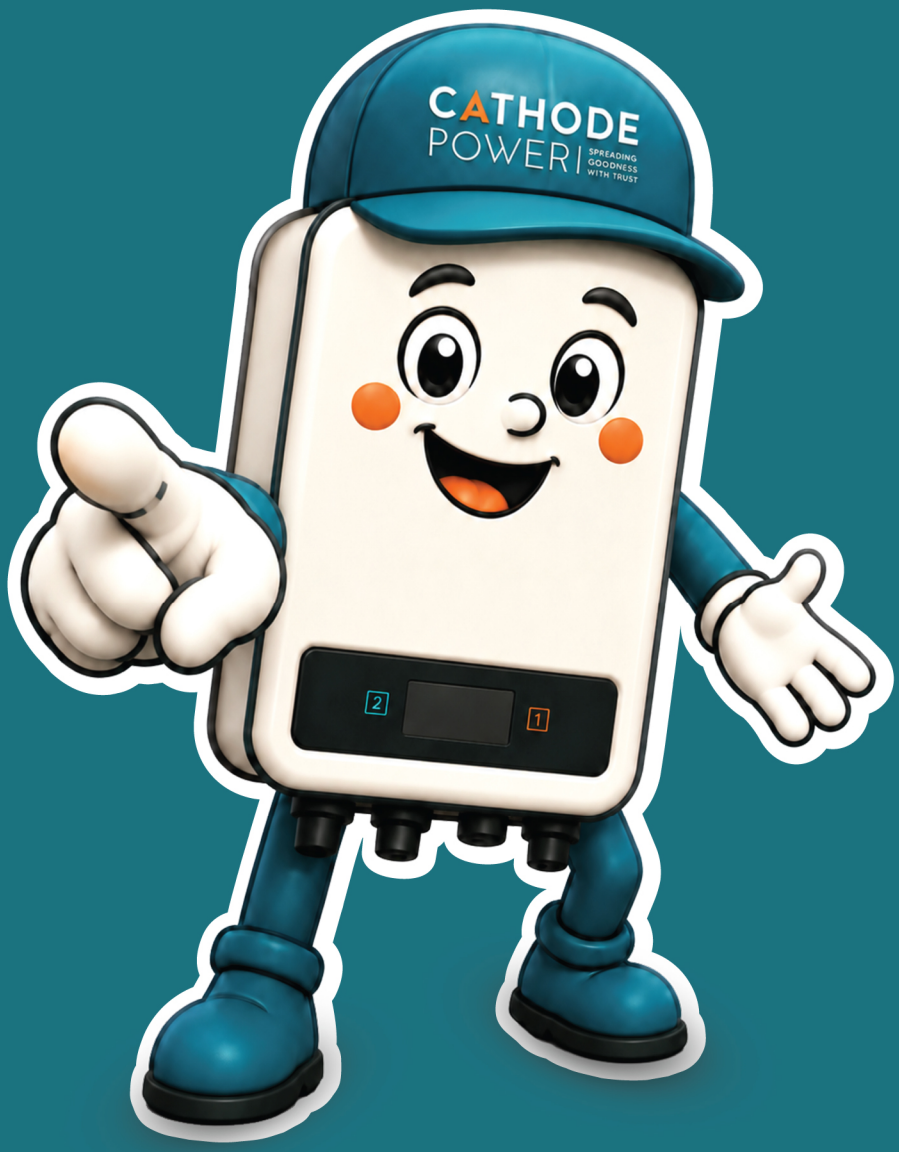


CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS


WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

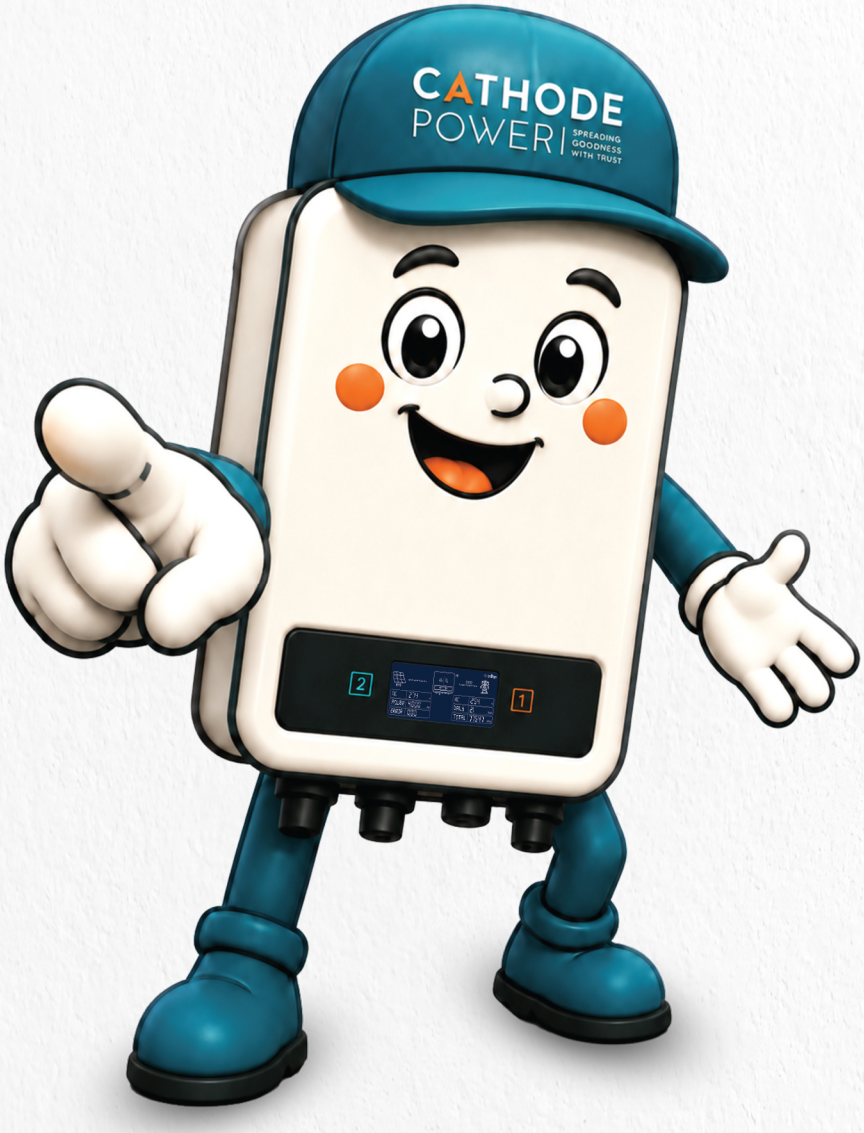

THREE PHASE
SOLAR GTI (SINGLE MPPT)

4 kW | 5 kW | 6 kW | 8 kW | 10 kW | 12 kW | 15 kW

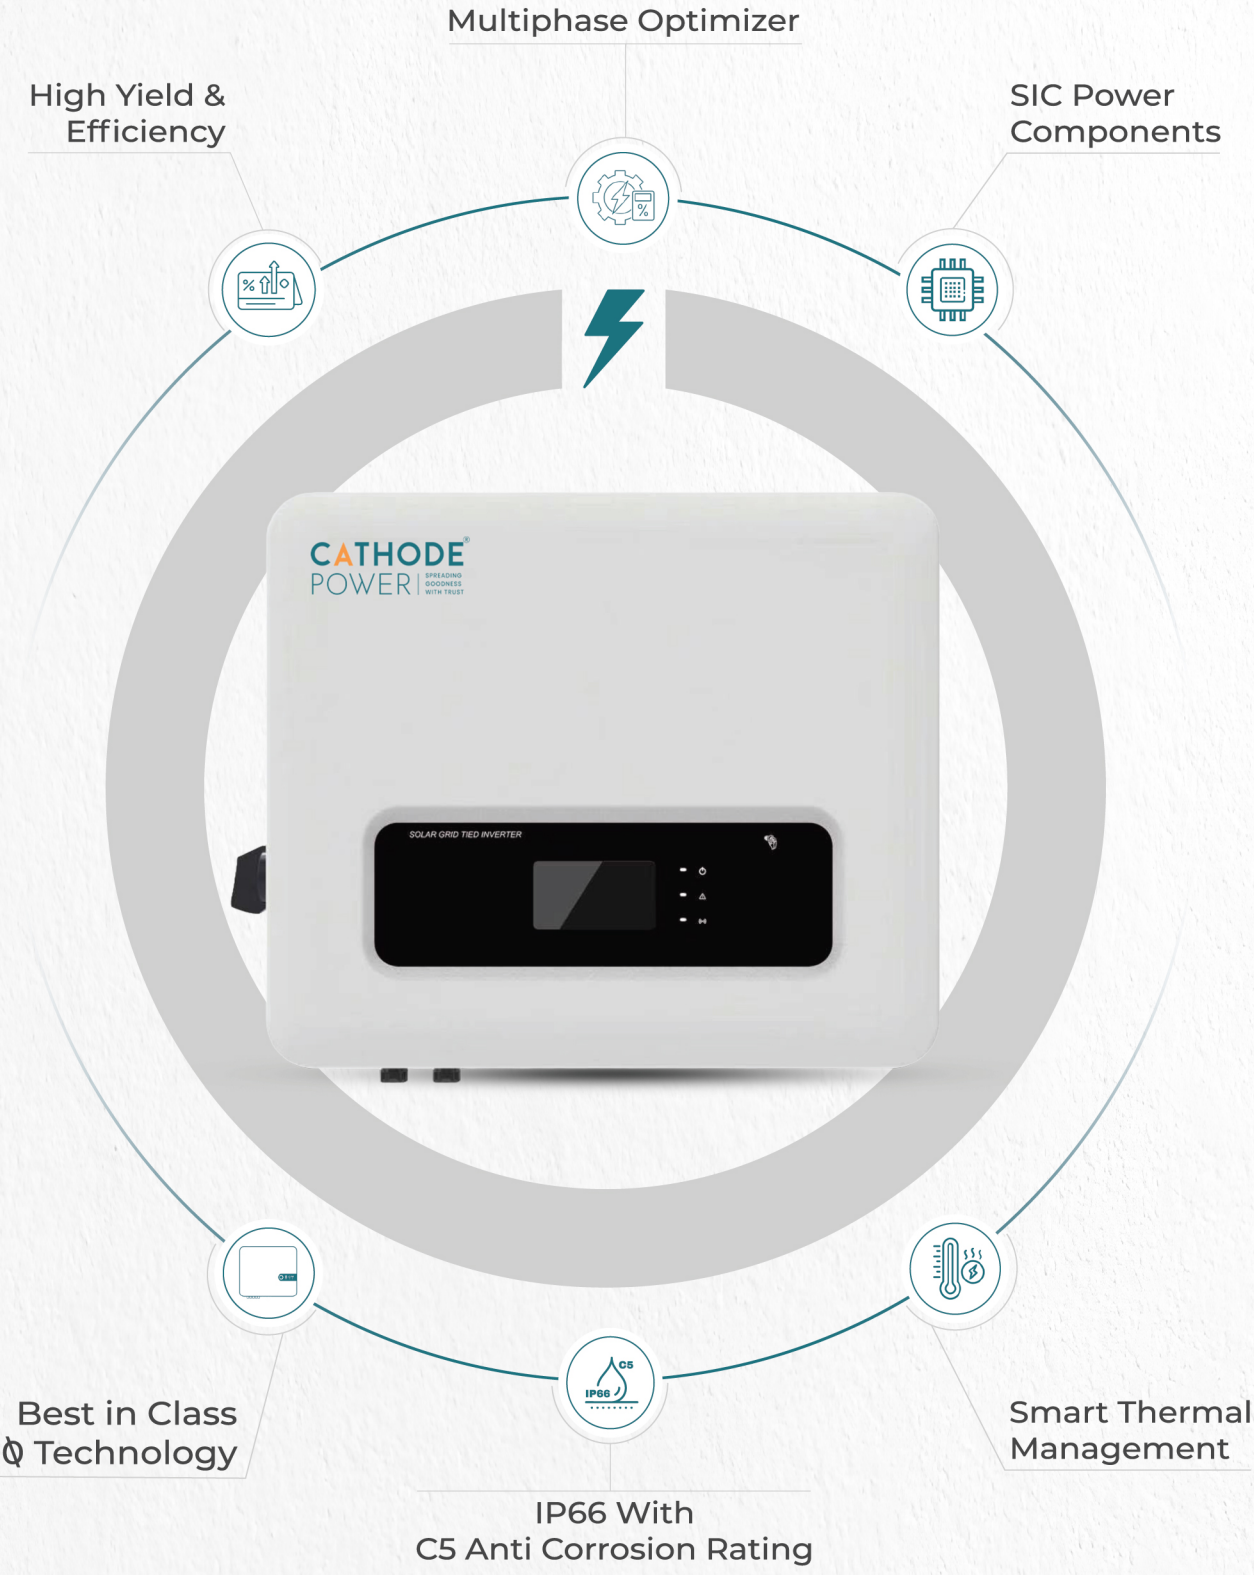


CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(6G-04HLS TO 6G-15HLS)

MODEL NO.	6G-04HLS	6G-05HLS	6G-06HLS	6G-08HLS	6G-10HLS	6G-12HLS	6G-15HLS
DC Side | Input Parameters							
Max. Input Power	4.8kWp	6kWp	7.2kWp	9.6kWp	12kWp	14.4kWp	18kWp
Max. P.V. Power (Per MPPT)	4.8kWp	6kWp	7.2kWp	9.6kWp	12kWp	14.4kWp	18kWp
Max. DC Voltage	1000V						
Start-up Voltage	160V						
Nominal Voltage	600V						
MPPT Voltage Range	160V - 850V						
No. of MPP Trackers	1						
No. of PV Strings Per MPP Tracker	1						
Max. Input Current Per MPP Tracker	22A	22A	22A	22A	30A	30A	36A
Max. Input Short-Circuit Current Per MPPT	30A	30A	30A	30A	40A	40A	48A
AC Side | Output Parameters							
AC Nominal Output Power	4kW	5kW	6kW	8kW	10kW	12kW	15kW
Max. AC Apparent Power	4.8kVA	6kVA	7kVA	8.8kVA	11kVA	13.2kVA	16.5kVA
Nominal AC Voltage L-N / L-L (Range*)	230V/400V (290V - 490V)						
AC Grid Frequency (Range*)	50Hz; 400Vac						
Max. Output Current	8A	10A	12A	15A	17A	20A	25A
Adjustable Power Factor	>0.99, 0.8 Leading To 0.8 Lagging						
THDi	<5%						
AC Grid Connection Type	3 W/N/PE						
Efficiency							
Maximum Conversion Efficiency	98.2%			98.3%	98.4%	98.4%	
European Efficiency	97.7%			97.8%	97.9%	98.0%	
MPPT Efficiency	99.9%			99.9%	99.9%	99.9%	
Safety & Protection							
Anti Flow Protection	OPTIONAL						
DC Switch	OPTIONAL						
DC Reserve Polarity Protection	YES						
AC/DC Surge Protection	TYPE I + II / TYPE II						
Insulation Resistance Monitoring	YES						
AC Short-Circuit Protection	YES						
Grid Monitoring	YES						
Anti-islanding Protection	YES						
Residual-Current Monitoring Unit (GFCI)	YES						
String Fault Monitoring	OPTIONAL						
AFCI Protection	OPTIONAL						
Anti PID Function	YES						
General Parameters							
Noise	<35dB						<50 dB
Dimension (LxWxH) (mm)	420/370/130mm						
Weight	16kg						
Operating Temperature Range	-25°C To 60°C (Greater Than 45°C Derating)						
Relative Humidity	0-95%, No Condensation						
Altitude	4000m (> 2000m Derating)						
Self-Consumption At Night	<1W						
Topology	Non-isolated/Transformerless						
Cooling	Smart Cooling Fan						
Protection Degree	IP65						
DC Connection	H4/MC4 (Optional)						
AC Connection	Connector						
Warranty	10 Years						
Display	LCD						
Communication	Host: RS 485 + USB Optional: 4G/WI-FI						

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

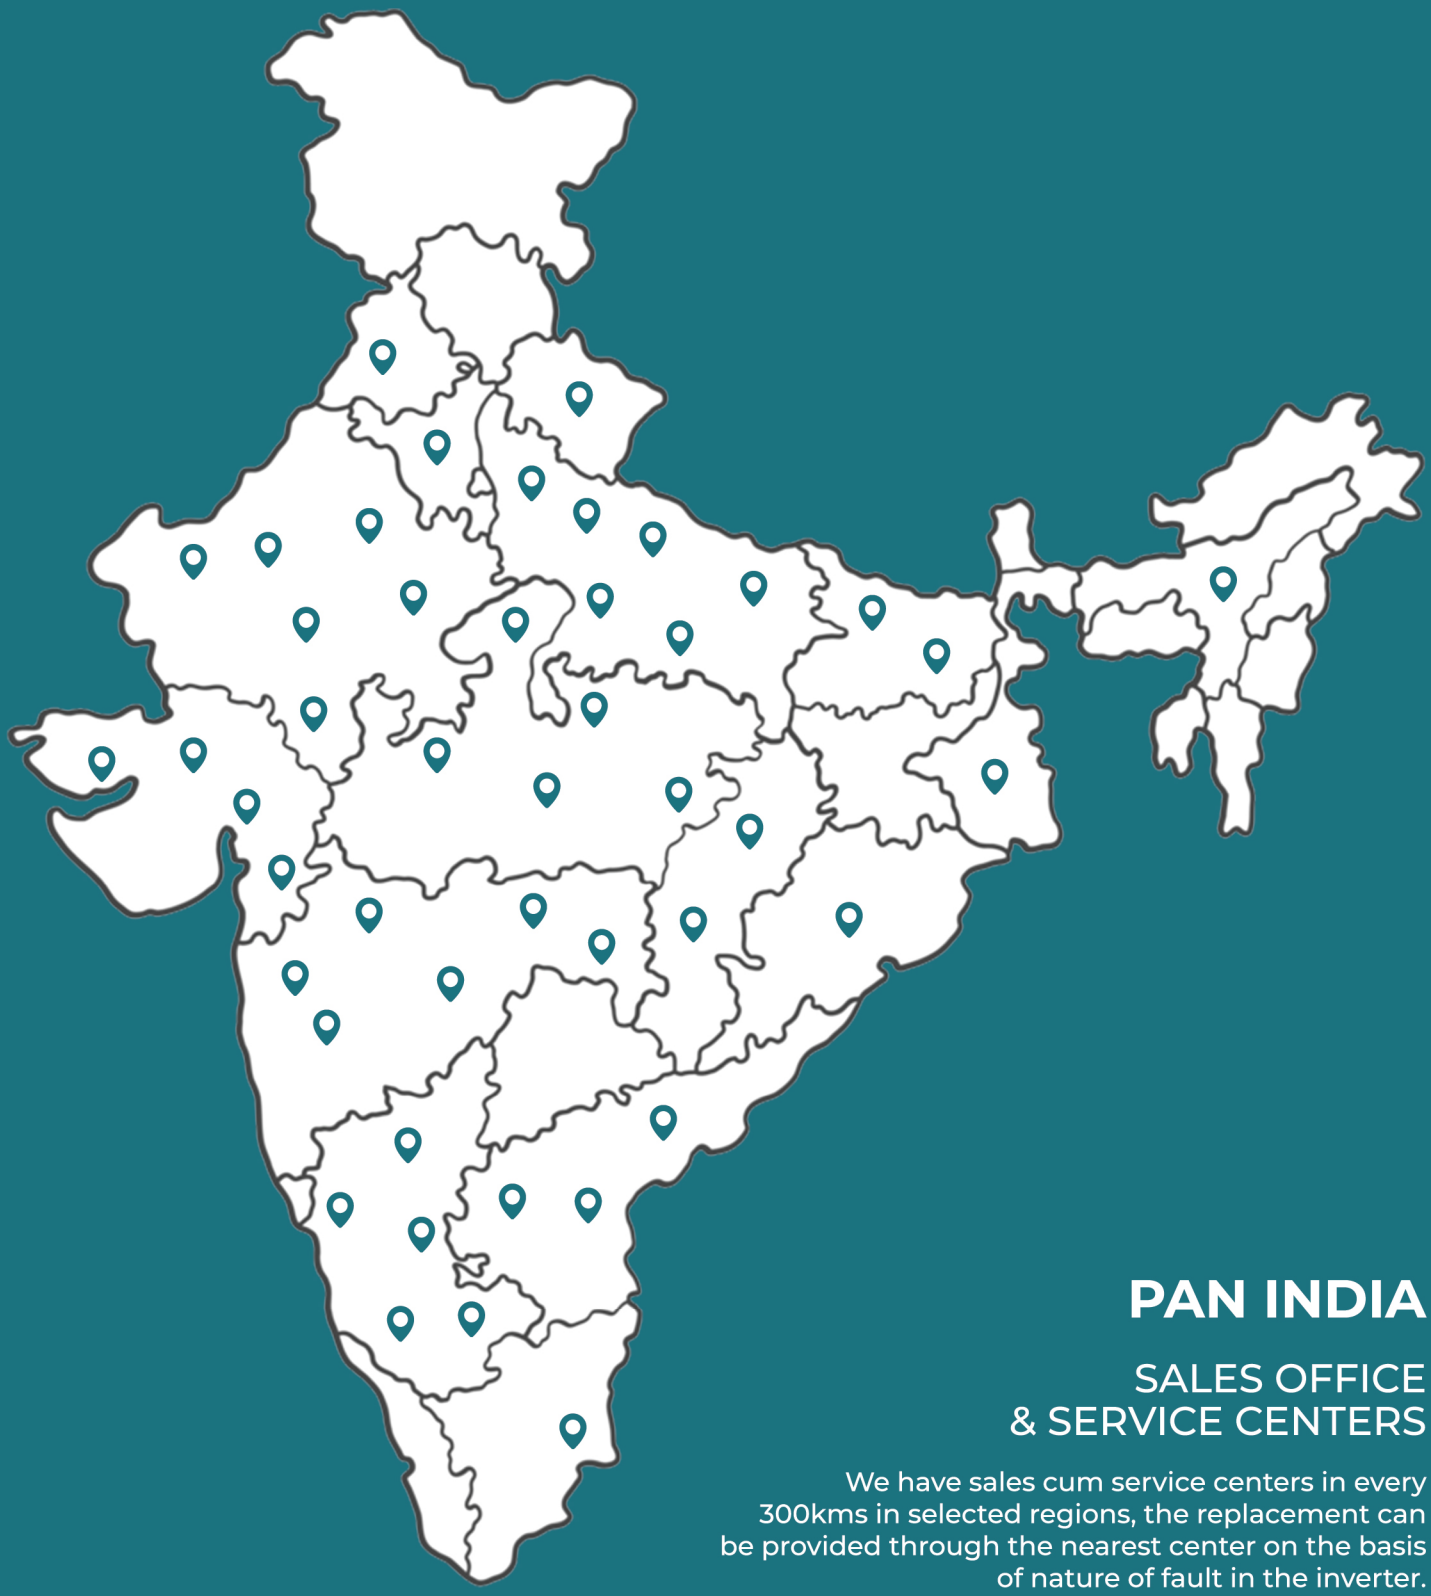

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com