



SOLUTIONS

Final Editorial Layout + Content + SEO Blueprint

The Solutions page explains what the customer can build with Laxmi - complete AAC block and panel plant solutions, plus Dry Mix Mortar Plant solutions. Machinery explains WHAT makes the solution work; Solutions explains the complete plant/business outcome.

What can I build? Start with the right plant solution.

AAC Block & Panel Plant | Dry Mix Mortar Plant

Keep Solutions simple

One main Solutions page, with two focused inner pages. Do not multiply URLs unnecessarily.

01 **SOLUTIONS**
solutions.html

02 **AAC BLOCK & PANEL PLANT**
aac-block-panel-plant.html

Inside the AAC Block & Panel Plant page, present **AAC Block Plant** and **AAC Panel Plant** as two product/application outcomes - not two additional HTML pages.

03 **DRY MIX MORTAR PLANT**
dry-mix-mortar-plant.html

The navigation therefore stays clean while the inner solution page can carry the detailed block/panel story.

Solutions for the plant you want to build.

Use the same visual language as the homepage: large editorial type, one dominant plant visual, minimal UI.

LAXMI EN-FAB / COMPLETE PLANT SOLUTIONS

Build the right production solution

From AAC block and panel plants to Dry Mix Mortar Plant solutions, Laxmi brings plant, machinery and engineering context together.

EXPLORE AAC PLANTS



Hero visual: actual Laxmi plant/layout/solution visual. Keep the left text-safe and let the plant image dominate the right.

Choose your solution

Do not make this a card grid. It is a two-path editorial decision.

WHAT ARE YOU LOOKING TO BUILD?

AAC PLANT

Block + Panel production solutions

[EXPLORE →](#)

DRY MIX MORTAR


Dry Mix Mortar Plant solution

[EXPLORE →](#)

Supporting line: **Start with the complete production requirement, then choose the equipment and engineering path.**

AAC Block & Panel Plant

This is the main commercial solution story.

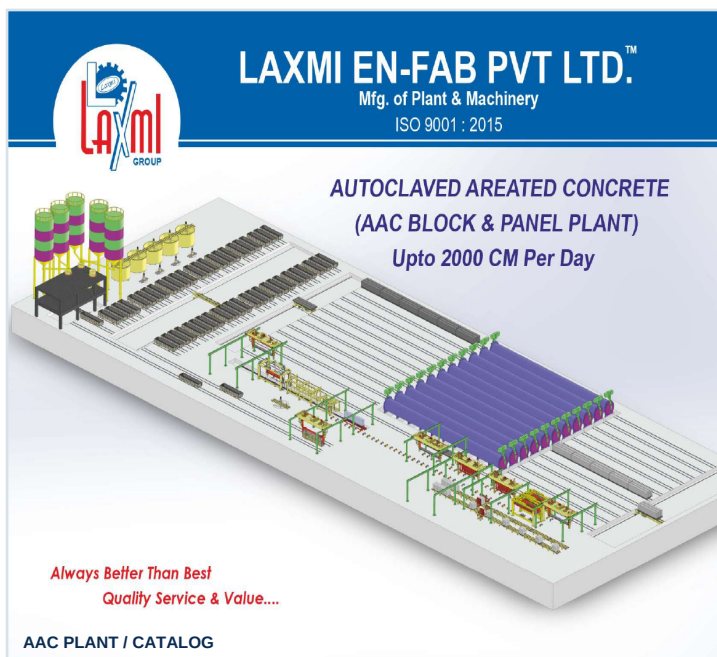

AAC PLANT SOLUTION

A complete AAC production plant.

The catalog's core offering is an Autoclaved Aerated Concrete (AAC) block & panel plant. The plant brings process, layout and machinery together as one production system.

PRODUCTION FLOW

Raw material → batching → pouring → precuring → cutting → autoclaving → packing

CTA: [Explore the AAC Block & Panel Plant →](#)

One plant. Two product directions.

Keep Block and Panel as two strong application stories within the same solution page.

AAC BLOCK

Autoclaved Aerated Concrete or AAC blocks, is a steam-cured cementitious product manufactured from a mix of fly ash(Sand), cement, lime, gypsum and aluminum powder giving it its unique lightweight internal structure. Its attributes like its light weight nature, excellent thermal insulation, acoustic properties and energy efficiency make AAC an intelligent building solutions system.

As a revolutionary precast building material, AAC blocks offer a unique combination of high durability and strength, low weight, unprecedented build ability and superior ecological green features and is fast replacing ordinary red clay and fly ash bricks, AAC blocks is the preferred choice for all building applications and is used for all kinds of walls, be it external or internal, non-load bearing walls etc.

STANDARD BLOCK



Standard Blocks offer a fast, convenient and versatile solution for most walling requirements. Each block is equivalent to 7 pieces of common brick. AAC blocks are easy to work with and can be cut to size with a tungsten carbide-tipped handsaw. This allows maximum flexibility and minimizes wastage.

Length x Height (mm)	Thickness (mm)	Quantity Per CM
600 x 200	50	156
	100	83
	150	56
	200	42
	225	37
	250	33
	300	26

AAC BLOCK

INTERLOCKING BLOCK



Construction gets easier and neater with the introduction of Interlocking Blocks. Block edges are profiled with tongue and groove interlocking joint system that does not only make wall construction much easier but also produce a more stable wall.

Length x Height (mm)	Thickness (mm)	Quantity Per CM
800 x 200	150	56
	200	42
	150	45
900 x 250	200	33

APPLICATIONS:

- General internal & external walls
- Party, compartment & separating walls
- Acoustic & fire-rated walls

SPECIFICATION :

Properties	Value
Density (Over Dry)	500-650 kg / m3
Compressive Strength	>4 N/mm2
Thermal Conductivity	~ 0.16 W/mK
Water Absorption	10 % - 12 %
Drying Shrinkage	0.013%
Fire Rating	4 - 8 Hrs. (for 200mm thickness)
Sound Absorption	45 Db - 50Db
Color	Greyish White

AAC PANEL

Panels are a perfect solution to construct large scale commercial and industrial buildings. The AAC panel are With increased load bearing capacity due to use of embedded steel reinforcement, the need of additional bond beams and staff columns can be eliminated.

The AAC panels are large in size compared to traditional building materials and come customized according to building requirements which results in substantial reduction in construction time. AAC panels of 3000 mm are equivalent in area to approximately 93 standard bricks, making them faster to install than other masonry products.

APPLICATION

With its multitude of advantages,

reinforced AAC Panels can be used for all kinds of modern-day construction.


Along with suitability for versatile needs of the building process like...

- Residential / Commercial Units
- Hospitals
- Factories
- Schools / Universities
- Hotels

SPECIFICATION

Properties	Value	Size specification
Load bearing capacity	5.0 - 6.5 kN/m ²	Width: 600mm
Dry density	550-580 kg/m ³	Length: 2400-6000mm
Working density	790-820 kg/m ³	Thickness of 75-200mm per 25mm interval.
Heat conductivity	0.13 W/mK	
Dry shrinkage	< 0.09 %	
Modulus of elasticity	2190 KN/m ²	

AAC PANEL

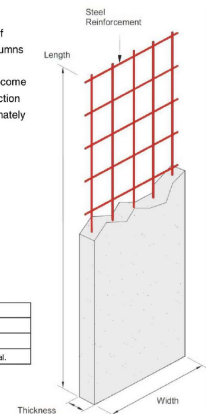

AAC BLOCK

Standard and interlocking blocks for internal/external walls and other applications shown in the catalogue.


AAC PANEL

Reinforced panel solutions, including floor/roof and wall panel applications shown in the catalogue.

Use these as two editorial routes on [aac-block-panel-plant.html](#), not separate HTML pages.

Process + plant layout

Show that the solution is complete because the process, machinery and layout are connected.

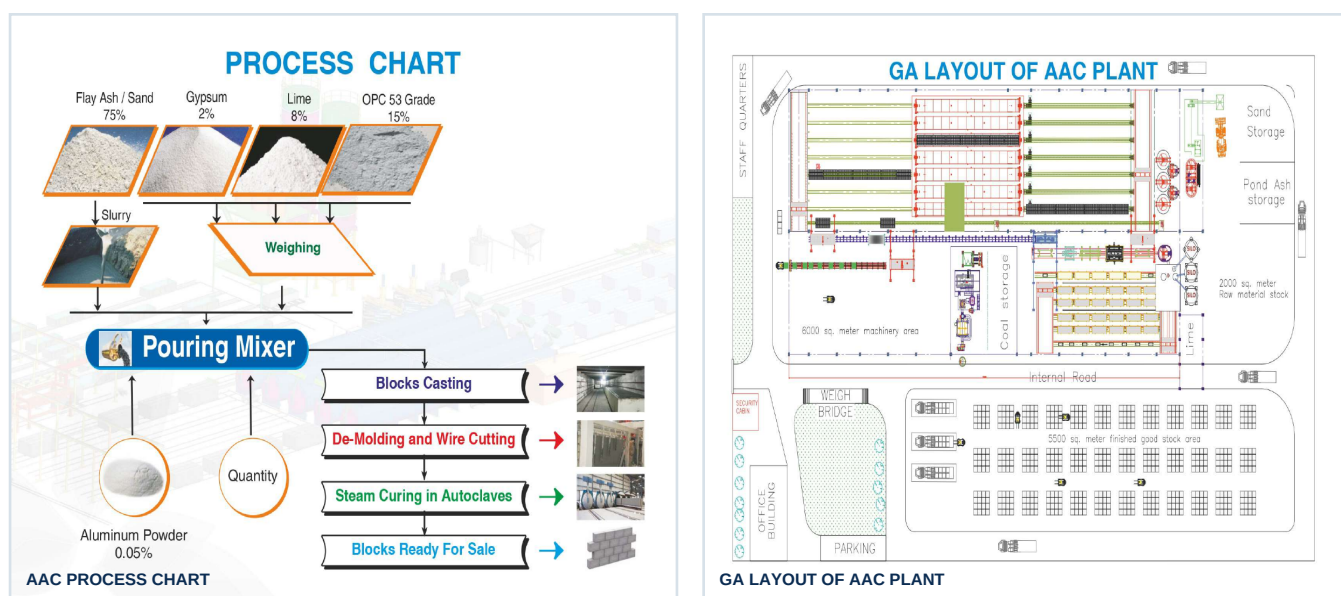

The catalog shows the production process from raw materials through slurry/weighing, pouring, casting, de-moulding and wire cutting, steam curing in autoclaves and finished blocks. It also contains GA plant layouts.

Design: use the process diagram and plant layout as large editorial visuals, then link to Engineering Center for deeper technical exploration.

Dry Mix Mortar Plant

Give the second solution its own strong story and focused CTA.

DRY MIX MORTAR PLANT



LAXMI EN FAB PVT. LTD. has specially developed Dry Mix mortar plant with greater mixing accuracy, highly efficient sand dryer, accurate dosing system, Rigid structure with automatic conveying system and Storage system.

Plant Range

- 40 Ton to 400 Ton production capacity
- Automatic and manual system.



DRY MIX MORTAR PLANT

DRY MIX MORTAR

A dedicated mixing & conveying system

The catalog describes Laxmi En Fab Dry Mix Mortar Plant with mixing accuracy, efficient drying, accurate dosing, automatic conveying and storage. It lists a 40–400 ton production range and automatic/manual systems.

CTA: [Explore Dry Mix Mortar Plant](#) →

Source visual: catalog page 31.

Beyond the plant

Keep related dry-mix products as a supporting strip, not a second catalogue.

AAC BLOCK JOINTING MORTAR

Colour	Gray
Main Binder	Ordinary Portland Cement
Fine aggregate	Processed, Graded Sand (Max. Size of Aggregate : 600 micron)
Polymers	Special Polymers Having a) adhesion and b) Self Curing Properties
Bulk Density	1400 Kg/CuM
Coverage"	1.5 kg/Sqm/mm on plain surface
Compressive Strength	6.00 - 8.00 N/mm ²
Mixing Ratio	13-14 liters of clean water / 40kg bag



ECO PLASTER

Colour	Gray
Main Binder	Ordinary Portland Cement
Fine aggregate	Processed, Graded Sand (Max. Size of Aggregate : 3.00mm)
Polymers	Special Polymers Having a) adhesion and b) Self Curing Properties
Bulk Density	1500 Kg/CuM
Coverage"	1.6 kg/Sqm/mm @ 1.50Kg/Sq ft area considering 10 mm thickness
Compressive Strength	8.00 - 10.00 N/mm ²
Mixing Ratio	7 - 8 liters of clean water / 40kg bag

WALL PUTTY WHITE

Colour	White
Main Binder	White Cement
Fine aggregate	Graded Limestone Powder (240 Mesh)
Polymers	Special Polymers having a) adhesion and b) self Curing Properties
Bulk Density	1150 Kg/CuM
Coverage"	1.2 kg/Sqm/mm i.e. 10/Sq ft area considering 1.00 mm thickness
Compressive Strength	8.00 - 10.00 N/mm ²
Adhesion Strength	0.90 - 1.00 N/mm ²



TILE ADHESIVE

Main Binder	Ordinary Portland Cement (Grey/White)
Fine aggregate	Processed, Graded Sand (Max Size of agregat : 600 micron)
Polymers	Special Polymers having a) adhesion and b) Self Curing Properties
Bulk Density	1450 Kg/CuM
Coverage	90 Sq ft per 40 kg bag for a bed thickness of 3 mm
Tensile Adhesion, Dry	1100 -1200 N
Tensile Adhesion, Wet	950 - 1050 N

AAC BLOCK JOINTING MORTAR / ECO PLASTER / WALL PUTTY / TILE ADHESIVE


Associated products shown in the catalog include **AAC Block Jointing Mortar, Eco Plaster, Wall Putty White and Tile Adhesive.**

Do not give every product its own top-level website page unless the client later requests a broader product catalogue.

CTA: Discuss a Dry Mix Mortar Requirement →

Real plants. Real manufacturing context.

Use physical proof to bridge the solution story with trust.

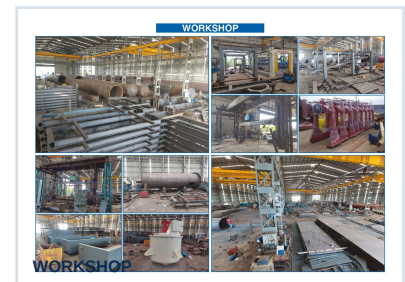

Show three proof ideas: **installed projects**, **workshop/manufacturing**, and **dispatch**. Keep the copy brief.



The catalog contains an installation collage with multiple locations, a Workshop page and a Dispatched page.

CTA: **See Projects** → | **See About Us** →

Choose the solution before the machine.

Move visitors from the complete plant idea to Machinery, Engineering or Academy.

01 **START WITH THE PRODUCT** Block, panel or dry-mix mortar requirement.

02 **DEFINE THE OUTPUT** Capacity and production goals.

03 **UNDERSTAND THE PLANT** Layout, process and site context.

04 **SELECT MACHINERY** Choose equipment within the complete system.

05 **PLAN EXECUTION** Engineering, installation and commissioning.

This is the bridge between Solutions, Machinery & Equipment, Engineering Center and AAC Investor Academy.

Solutions SEO specification

Commercial intent belongs here. Detailed machine/process queries belong on the relevant inner pages.

AAC Plant Solutions | AAC Block, Panel & Dry Mix Mortar Plant | Laxmi En-Fab

Title

Explore complete AAC plant solutions for block and panel production, plus Dry Mix Mortar Plant solutions from Laxmi En-Fab.

Meta

Build the right production solution.

H1

AAC plant manufacturer; AAC block plant; AAC panel plant; Dry Mix Mortar Plant.

Primary

AAC plant solution; AAC block plant solution; AAC panel plant solution; dry mix mortar plant manufacturer.

Supporting

solutions.html | aac-block-panel-plant.html | dry-mix-mortar-plant.html

URLs

SEO rule: keep the main page broad; put detailed block/panel and dry-mix content on their focused inner pages.

Responsive + conversion

The Solutions page should feel like the homepage's sibling, not a separate corporate template.

01

DESKTOP

Large editorial hero, two solution paths, big plant/process visuals.

02

TABLET

Stack visual groups while preserving type hierarchy.

03

MOBILE

One-column stories, touch-friendly solution selector.

Not sure which solution fits?

Start with your product, site and production requirement. Then move into the right plant, machinery and engineering path.

[TALK TO LAXMI](#)[EXPLORE MACHINERY](#)

Implementation: use real Laxmi imagery, subtle IntersectionObserver reveals, reduced-motion support, optimized images, accessible links and no heavy animation framework.

Final formula: **What can I build?** → **Which solution?** → **What does the plant contain?** → **Where is it working?** → **What's next?**