



TRS4531

CONTAINER REACH STACKER

Power
Efficiency
Technology



Tecport

Derechos Reservados / All Rights Reserved

Advanced Technology, Exceptional Performance

With multiple advantages, this equipment delivers high levels of safety, efficiency, precision, and stability. The integrated operating system ensures superior productivity.


The TRS4531 Reach Stacker is equipped with a comprehensive control system based on the CAN-BUS protocol. The engine, transmission, electrical, hydraulic, load safety, and spreader systems are all integrated into the CAN-BUS network, enabling real-time monitoring of all components.



High-Quality, High-Performance Engine

Equipped with a Cummins engine, available in QSM11 Stage III and X12 EURO V versions, featuring a fully electronic control system that ensures efficient fuel consumption.


The turbocharged design enhances engine power and overall efficiency, delivering robust performance suitable for a wide range of operating conditions.

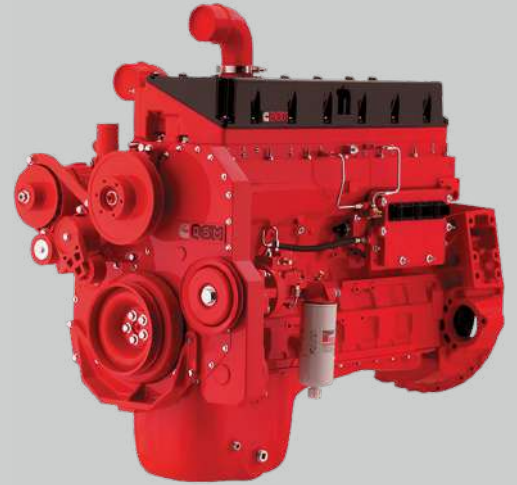

Hydrodynamic Transmission

DANA TE30 transmission with 5 forward and 3 reverse gears, providing smooth operation and economical performance. Designed for minimal maintenance and long service life.

The inching function ensures precise maneuvering, while the integrated reverse lock and speed reduction protection systems enhance operational safety and control.



High-Strength Drive Axle

Kessler D101 drive axle featuring a wide track, two-stage reduction gearbox, and a reinforced axle housing optimized for extreme load conditions.

The oil-immersed disc brake system is maintenance-free.

The traction axle is engineered to minimize impact loads, ensuring high safety, reliability, and extended service life.




Hydraulic System

Hydraulic system engineered by Linde Hydraulics, featuring HPR105-02R variable displacement pumps with a high volumetric capacity of 105 cc/rev. It delivers maximum energy efficiency by precisely matching system demand, reducing fuel consumption, and optimizing engine performance.

Operating pressure reaches up to 400 bar, enhancing lifting efficiency and achieving speeds of up to 0.30 m/s.

The braking system is powered by an independent hydraulic reservoir and a Cassapa pump connected in tandem with one of the main hydraulic system pumps.

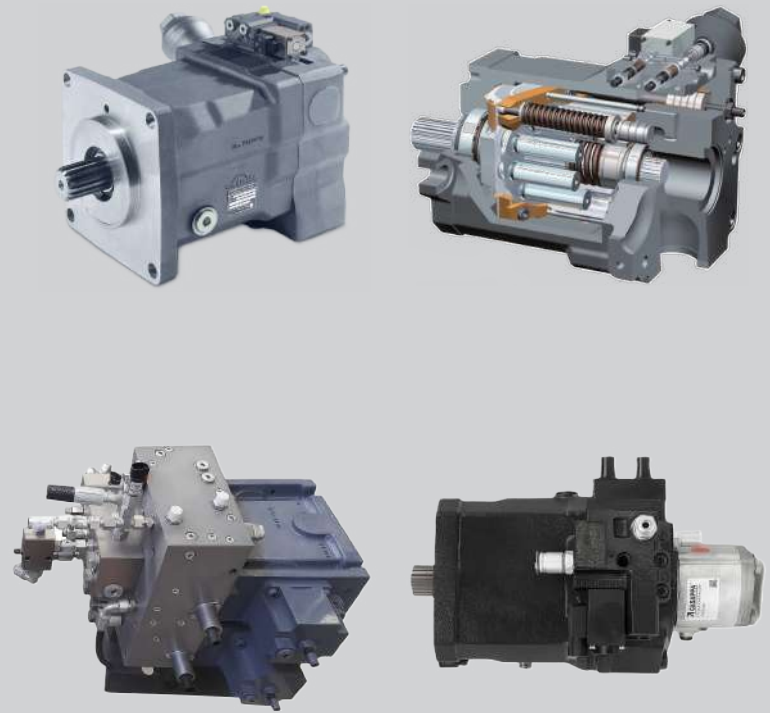

Full CAN-Bus Control System

The CAN-Bus system featuring the PARKER IQAN module and MD4 display provides a modern, robust, and reliable solution for container-handling equipment.

Its architecture is designed to integrate multiple electronic components into a single network, ensuring fast and secure communication while allowing new modules or functions to be added without redesigning the entire system.

With PARKER IQAN technology and the MD4 display, your container handler becomes an intelligent and dependable platform, ready to meet the demands of today's market.

It also enables real-time monitoring of electrical, hydraulic, and electronic faults, along with event logging and error codes for rapid and accurate diagnostics.







Core Technology

- Dynamic anti-rollover protection
- Load-sensing hydraulic technology
- Vertical lift function
- Automatic fault detection and real-time data display
- Anti-collision protection for boom and spreader
- Full communication via CAN-Bus network
- Mobile operator cabin
- Independent brake reservoir

Rigorous Design Process

The design, supported by FEM (Finite Element Method) analysis, provides high structural strength to both the chassis and the boom, ensuring overall equipment stability and robustness.

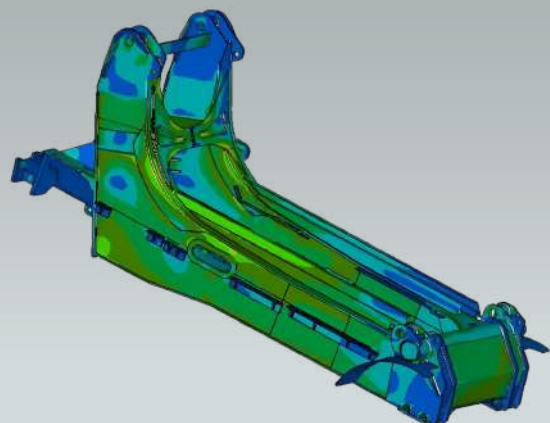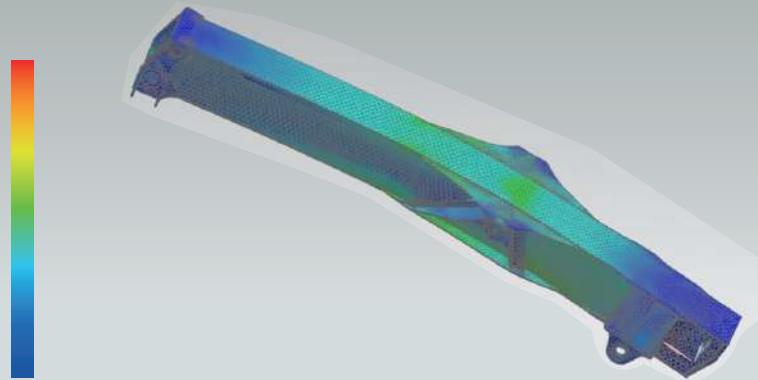

Spacious and Comfortable Operating Environment

The cabin adopts the latest ergonomic design—simple yet elegant, spacious, and comfortable.

The **POWER on DEMAND** system enables intelligent engine acceleration through software-based control of RPM, flow, and pressure, achieving optimal fuel efficiency according to real-time load and speed requirements.


A high-resolution **MD4 color touchscreen** provides real-time parameter visualization for intuitive operation.

The graphical interface simplifies monitoring of machine status and lifting or transport operations. It offers excellent sealing performance, with doors and windows that open and close smoothly and securely.

A multifunction joystick places all key controls conveniently at the operator's fingertips.

The premium-grade seat can be adjusted according to the operator's height and weight, ensuring comfortable and highly efficient driving.

The integrated safety video system provides excellent all-around visibility.

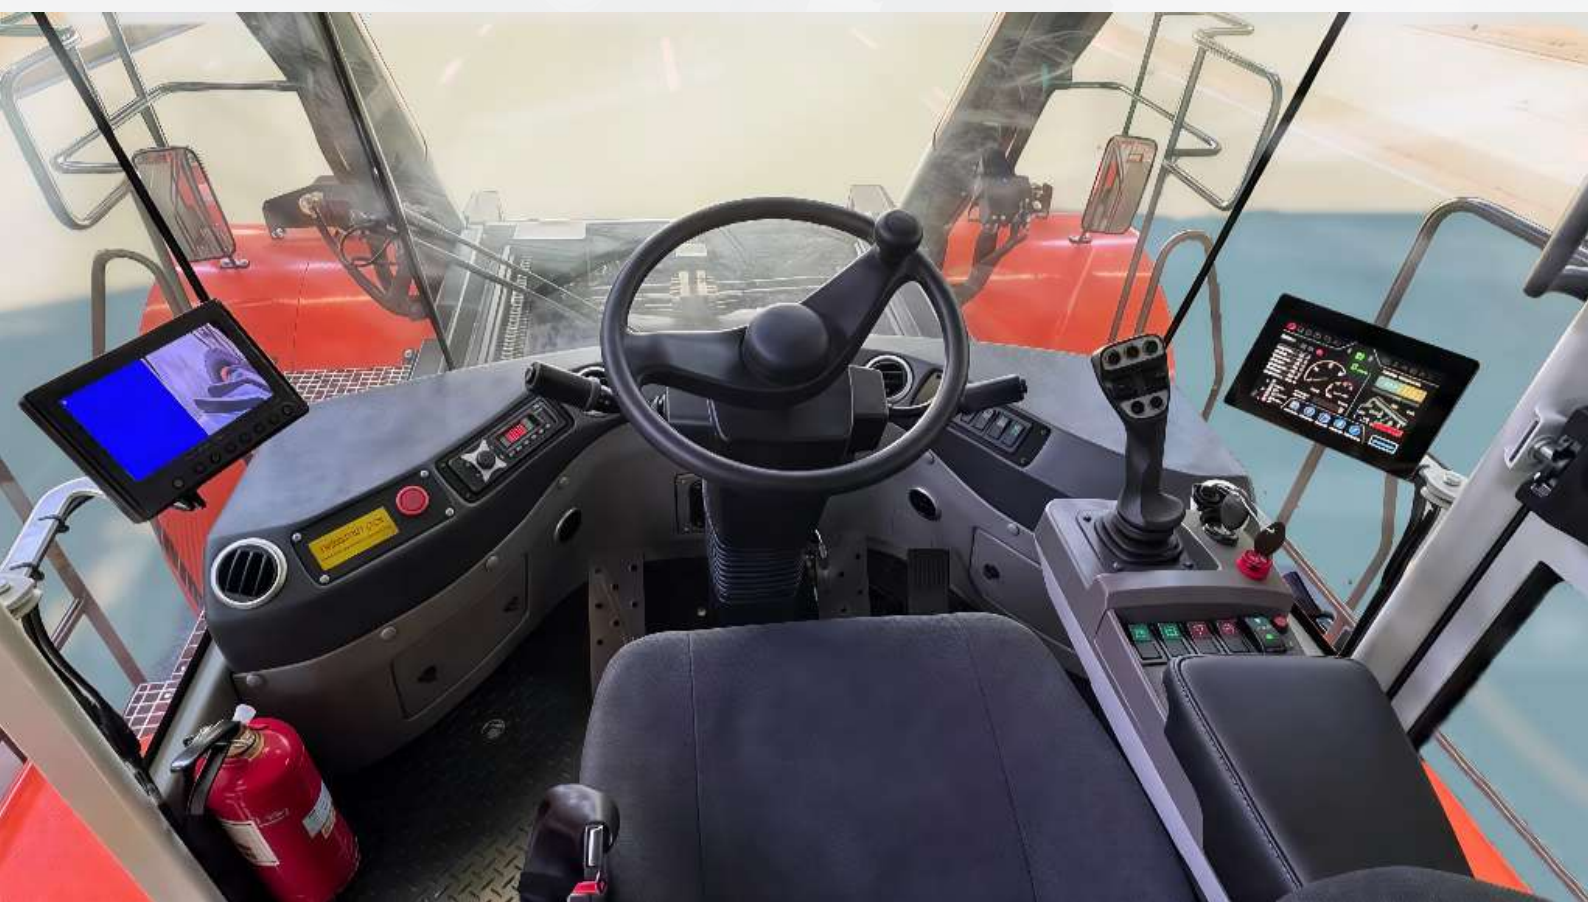

Multifunction Digital Display



High-resolution MD4 color touchscreen display providing clear, real-time visualization of all operating parameters.


Its intuitive graphical interface simplifies equipment status monitoring and enhances lifting and transport operations.

Functions include: level indicators, fault alerts, temperature sensors at multiple points, pressure sensors at multiple points, access to other system screens (general, spreader, engine, transmission, hydraulic), warning messages, among others.




Load Chart

TRS4531-5

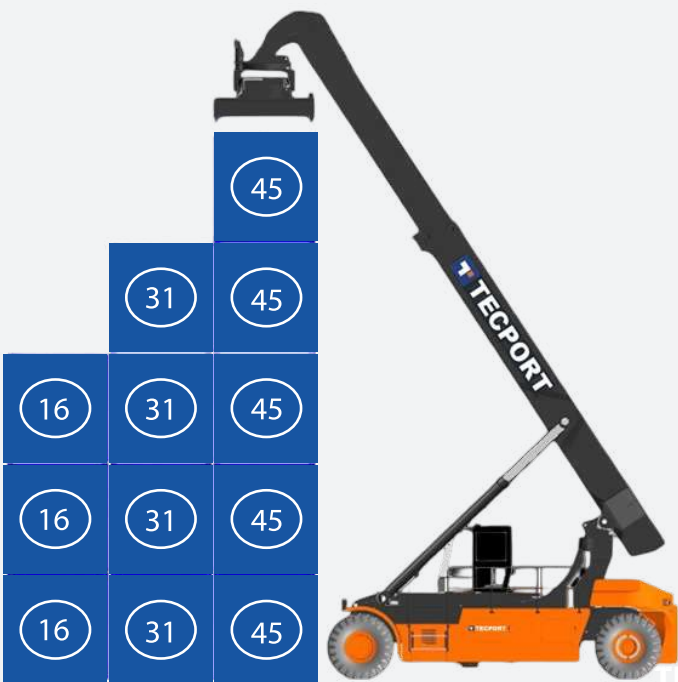

TRS4531-6

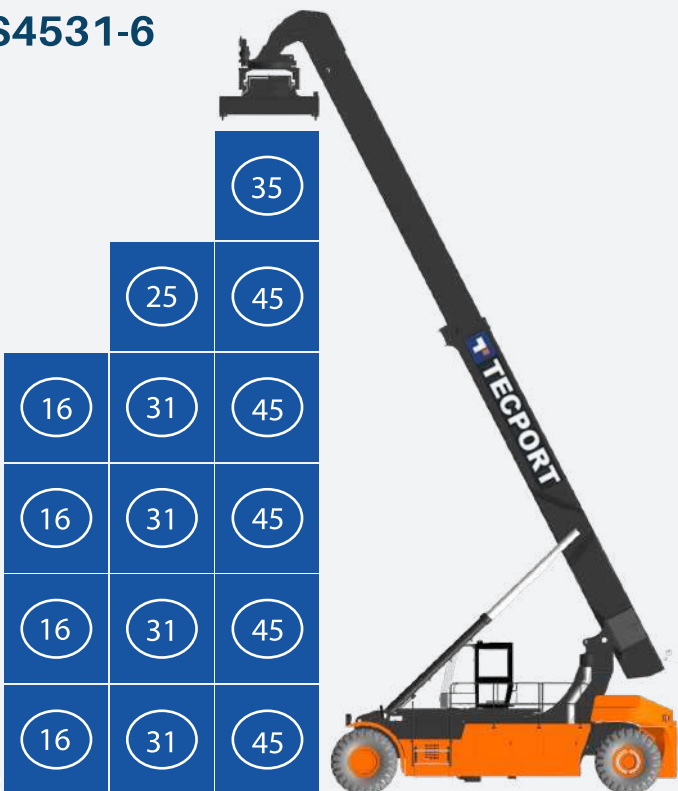



TRS4531

CONTAINER REACH STACKER

Power
Efficiency
Technology



TECPORT LATAM LLC

Columbus Center
One Alhambra Plaza
Coral Gables, FL 33134 USA
Tel: +1 305 - 3604679



TECPORT BRASIL

Antonio Ovidio Rodrigues 1061
Bonfin - Jundiai
SP - CEP 13213-180 - Brasil
Tel: +55 115181-2230



TECPORT PERÚ

Av. Angamos Oeste 651
Of. 905, Lima 15074, Perú
Tel: +51 1 6375162



TECPORT CHILE SPA

Av. Esmeralda 1525
El Tabo, Valparaíso, Chile
Tel: +569 54190781