



Tecport

TRS4531

REACH STACKER

TECHNICAL DATA

TRS4531 / Reach Stacker / Technical data

CHARACTERISTICS

Manufacturer		TECPORT
Model designation		TRS4531
Powerunit: battery, diesel, LP gas, mainspower		Diesel
Operation: manual, pedestrian, stand-on, seated, order picker		Rider seated
Load capacity (L1,L2,L3)	Q (kg)	45000 / 31000 / 16000
Load centre, First row (L1)	c (mm)	1800@ 6 floor, 2000@ 1~5
Load centre, Second row (L2)	c (mm)	3860
Load centre, Third row (L3)	c (mm)	6400
Axle centre to spreader center	c (mm)	2800
Wheelbase	c (mm)	6400

DIMENSIONS

Boom lift angle, raised / lowered	α/β (/ °)	61/0
Height boom lowered	h1 (mm)	4945
Lift height (L1,L2,L3)	h3 (mm)	15760 / 14100 / 11350
Height, boom extended	h4 (mm)	19000
Height of cabin	h6 (mm)	3900
Height, operators seat	h7 (mm)	2840
Towing coupling height	h10 (mm)	600
Twistlock height lowered	h13 (mm)	1495
Overall length with spreader	l1 (mm)	11618
Overall length	l2 (mm)	8410
Overall width	b1/b2 (mm)	4180 / 3400
Width of spreader 20'/40'	b3 (mm)	6050 / 12150
Ground clearance minimum	m1 (mm)	345
Ground clearance, centre of wheelbase	m2 (mm)	350
Stacking aisle 20'container	Ast (mm)	10225
Stacking aisle 40'container	Ast (mm)	13050
Turning radius	Wa (mm)	8605
Minimum pivoting point distance	b13 (mm)	3400
Wheelspan, Front wheels	b10 (mm)	3030
Wheelspan, Rear wheels	b11 (mm)	2786

WEIGHTS

		UnLaden	Laden
Weight	kg	71400	116400
Load on drive axle	kg	36400	101900
Load on steering axle	kg	35000	14500

PERFORMANCES

		UnLaden	Laden
Travelling speed	km/h	25	21
Climbing ability	%	30	28.8
Tractive force	kN	408	—
Lifting speed	m/s	0.39	0.28
Lowering speed	m/s	0.39	0.39

CABIN

Movable closed cabin	
Equipped with Air-conditioner, cooling / heating function	
Noise level at driver's ear	dBA 74

ENGINE

Brand Type	Cummins
Cylinder number / Displacement	QSM11
Rated power @ rated speed	6 / 10820 cm ³
Maximum torque	250 Kw @ 2100 rpm
Rated current of alternator	1674 NM @ 1500 rpm
Battery	150 A
	24 V (2 x 12V /150AH)


Note: Lift 31 ton container speed more than 0.3 m/s, spreader auto lock container and auto extended and retracted. High work efficiency.



TRS4531 / Reach Stacker / Technical data

TRANSMISSION		
Transmission Manufacturer	DANA	
Transmission type	DANA TE30	
ClutchType	Torque Converter	
Gear number F / R	5 / 3	
TYRES		
Drive wheels	18.00 - 2540 PR	
Steering wheels	18.00 - 2540 PR	
Type	Pneumatic	
Pressure	10 bar	
Quantity, Front / Rear	4 / 2	
TANKS CAPACITY		
Hydraulic oil tank	800 liter	
Fuel tank	500 liter	
DRIVE AXLE		
Driver axle manufacturer	KESSLER / Germany	
Type	D102PL341	
STEER AXLE		
Steering axle manufacturer	KESSLER / Germany	
Type	L102	
Steering	Double action cylinder	
BRAKE SYSTEM		
Service brake: Hydraulicwet - disc		
Parking brake: Electric released disc brake, enabled when power off		
Twin piston pump		
Maximum pressure: 310 bar		
Load sensing system		
Hydraulic cooler with electric motor		
separate brake oil tank		
BOOM		
2 x Dual action lift cylinders		
1 x Dual action extension cylinder		
SPREADER		
Handling ISO 20' - 40' containers		
2x damping cylinder	2 x gearbox & brake system	
Type	WLZSP45	
Rotate degrees	deg	-105° / + 195°
Sideshift	mm	- 800 / + 800
TRUCK SAFETIES		
Error display system		
Counting system for containers		
Weighing system (Low precision)		
Electric anti-overload system		
Full Can-bus control system		
Direction gear shift interlock		
Parking brake enabled when power off		
Seat switch		
SPREADER SAFETIES		
Locking / unlocking only after correct landing		
Lifting / lowering only when the 4 twistlocks on same position		
Anticollision rotation limit switch		

Note: Lift 31 ton containepre esd more than 0.3 m/s, spreader auto lock container and auto extended and retracted. High work efficiency.

TRS4531 / Reach Stacker / Technical data

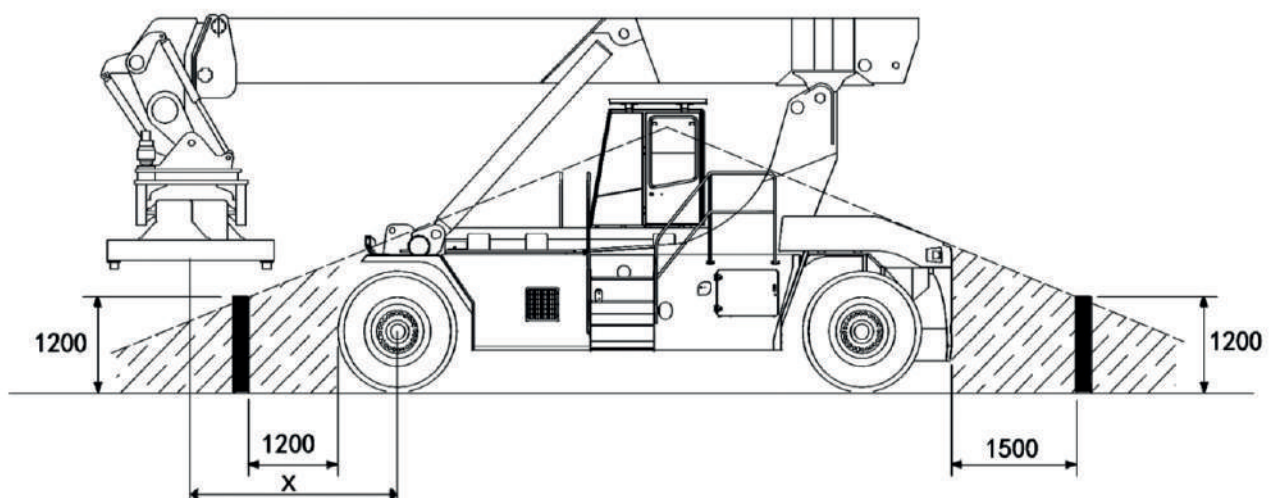

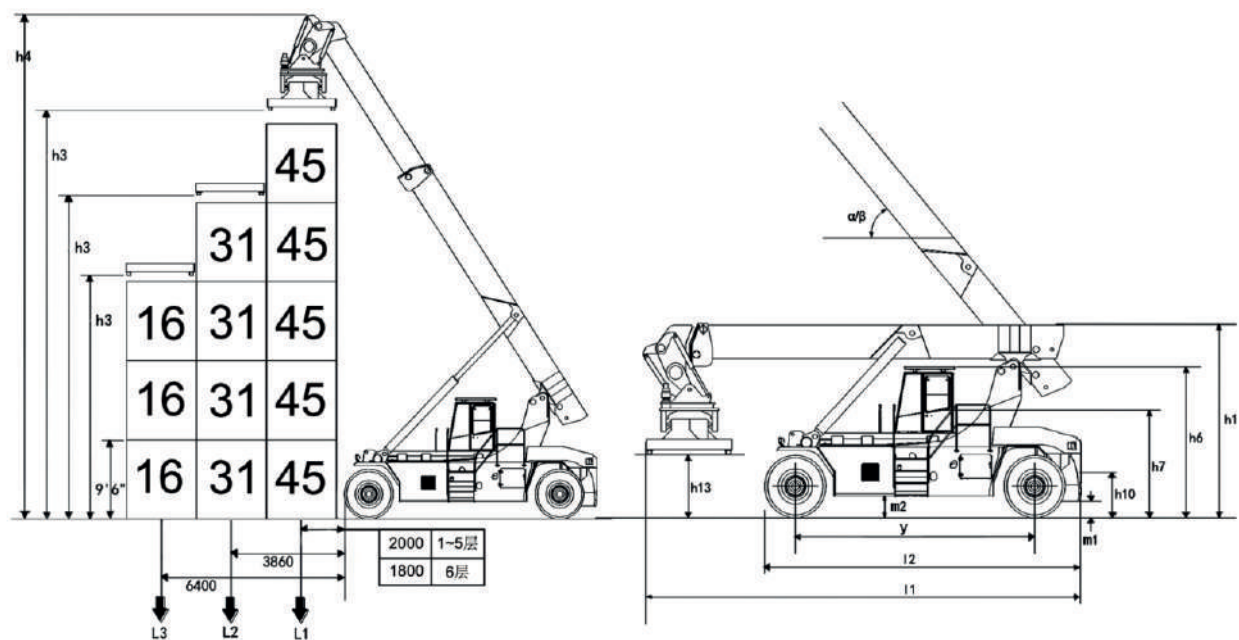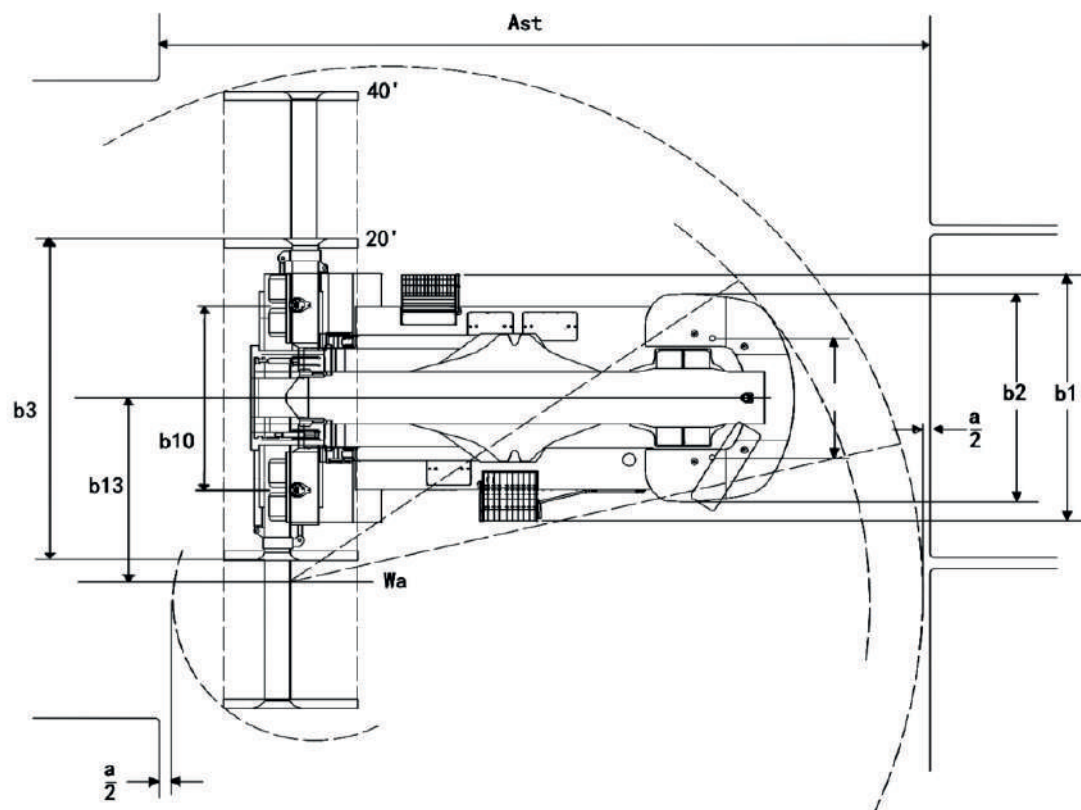



TRS4531 _ REACH STACKER

With multiple advantages, this equipment delivers high levels of safety, efficiency, precision, and stability. The integrated operating system ensures superior productivity.

The TRS4531 Reach Stacker is equipped with a comprehensive control system based on the CAN-BUS protocol. The engine, transmission, electrical, hydraulic, load safety, and spreader systems are all integrated into the CAN-BUS network, enabling real-time monitoring of all components.





TRS4531

REACH STACKER



TECPORT LATAM LLC
Columbus Center
One Alhambra Plaza
Coral Gables, FL 33134 USA
Tel: +1 305 - 3604679



TECPORT CHILE SPA
Av. Esmeralda 1525
El Tabo, Valparaíso, Chile
Tel: +569 54190781



TECPORT PERÚ
Av. Angamos Oeste 651
Of. 905, Lima 15074, Perú
Tel: +51 1 6375162



TECPORT BRASIL
Antonio Ovidio Rodrigues 1061
Bonfin - Jundiaí
SP - CEP 13213-180 - Brasil
Tel: +55 115181-2230

All Rights Reserved