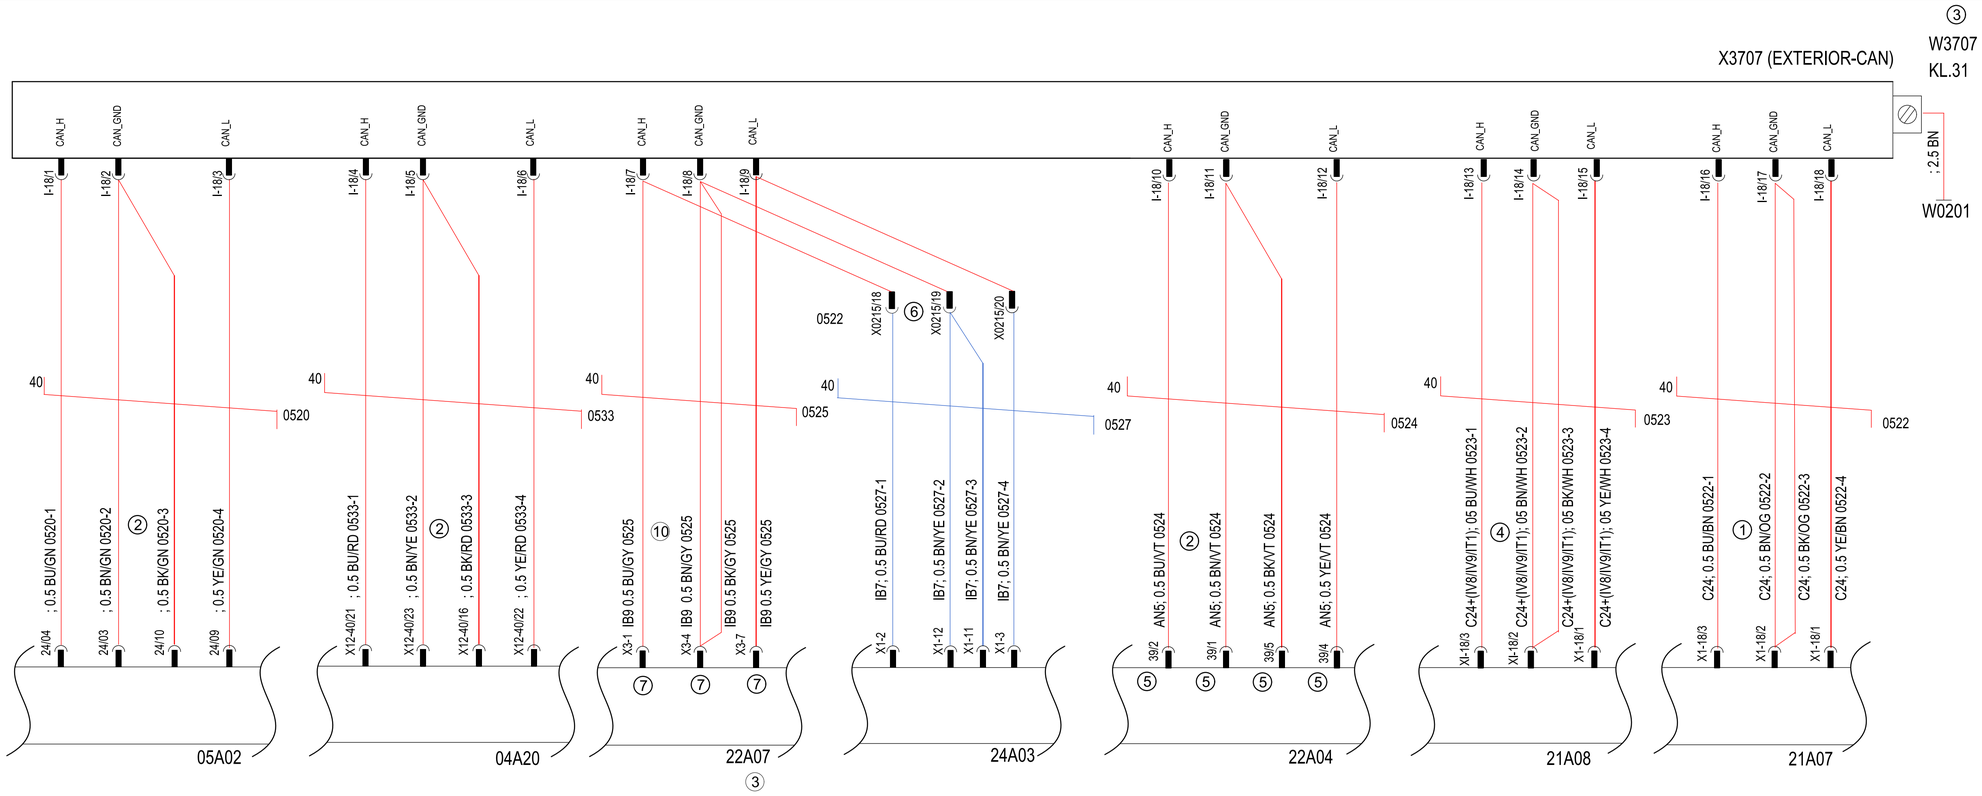

Wating definition

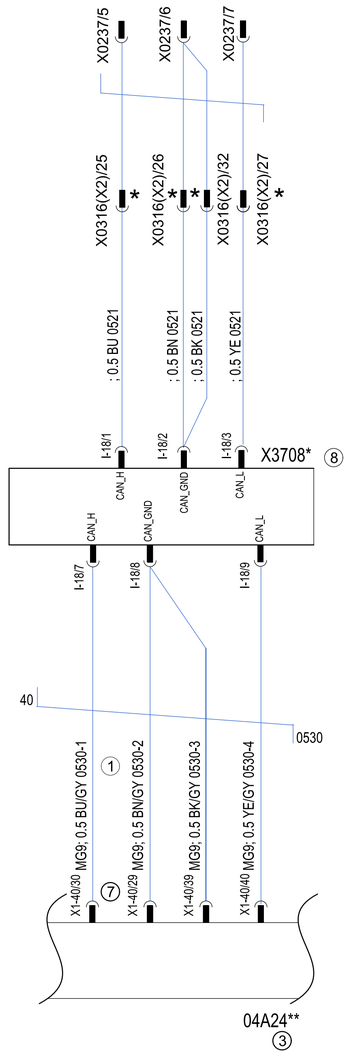

1/A1,C7/Changed Area/2/Changed Area & Color/3/A7/Changed name/4/B3/Add circuit & Connectors/5/C4/Changed Pins Quantity/6/B6/Add Connector/7/C3,C6/Changed connector/8/C4/Add Module/9/f4/Add Code/10/B3/Changed code//	002	BAR2817N11	brclaro 23-06-07	rafsil1 23-06-07	see Smaragd
Aenderungsindex / Aenderungsbeschreibung state of revision / revision text	ZGS	Auftrags-Nr. order no.	Bearb./auth. Datum/date	Pruef./check Datum/date	Norm/stand Datum/date

Werkstoff (Endzustand) / material (fi.co.)	Oberfl.sch./surf.prot. DBL		Datum/date	Name/name
	Farbe/color		Bearb./auth.	- -
	Dekor/decoration	MBN 31030	Pruef./check	- -
	Oberfl.ang./surf.texture	MBN 31007	Norm/stand.	- -
	Oberflaeche/surface (m^2)		Freig./rel.	see Smaragd

Stammdaten/ masterdata Smaragd	D-Pflicht/required MBN 10317	VeDoc-Relevanz/relevance MBN 10385	ESD-Kennzeichen/code A0598030	
	Art/ type / Anzahl Merkmale/ number of features	Anzahl/number of VPD-Ident-Nr./no.		
	DS		federf.Abt./resp.dep.	
	DZ		-	

Allg. Toleranzen/gen. tolerances	gesetzl.Merkmal/st.ftr.	ZGS -	Auftr.-Nr./order no. -

Referenz-Nr./reference no.	Masse/mass (kg)	Benennung/title STROMLAUFPLAN ELECTROTECHNICAL CIRCUIT DIAGRAM STAR POINT
Massstab/scale	System/system NX 1953	
Tolerierung/tolerancing		

Mercedes-Benz

© Daimler AG
Schutzvermerk DIN ISO 16016 beachten! / Refer to protection notice DIN ISO 16016!

Format/sz.	Blatt/sh.	Sach-Nr./basic number
A1	3	A 384 546 19 00

Keine Aenderung ohne Zustimmung der federfuehrenden Konstruktion. / Any alternations are subject to the approval of the design department.

Ab/As of 2019-11-01
Neuer Firmenname
new company name
Daimler Truck AG

10
Letzter Aend-Index
last state of revision

04A20	Advanced Sensor Actor Modul ASAM
04A24	Extended Activity Modul EAM4 ③
05A02	Central gateway CGW
21A07	Level control unit CLCS
21A08	Level control unit CLCR
22A07	ECU for articulation ATC - dg Chassis vehicles
22A04	Additional Steering Axle ASA
24A03	EAPU control unit ⑧
W0201	Ground main control panel
W3707	Mass main switchboard CAN star point ③
X3707	CAN star point Exterior 1 (500 Kb/S)
X3708	CAN star point Exterior 1 (500 Kb/S) Rear Engine
Item	Description

* Applicable only for Artic

** For rear engine vehicles the start point X3708 is assembled in the rear part of vehicle

⑧

CODE

AN5 - SEGUNDO EIXO TRASEIRO DIRIGIVEL ATIVO
C24 - REGULAGEM DE NIVEL DO VEICULO (ENR-ECAS)
IT1 - 37,0 TONELADAS
IV8 - 28 TON.
IV9 - 31,0 TONELADAS
IB7 - SERIES IBC
IB9 - SERIES CBC ARTICULATED
⑨ MG9 - LOCAL INTERFACENETWORK (LIN)

841x594