NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

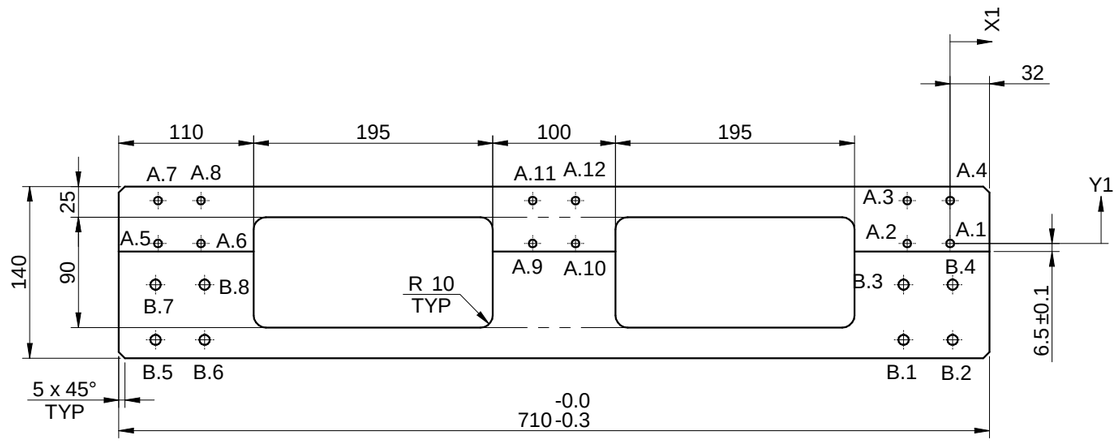

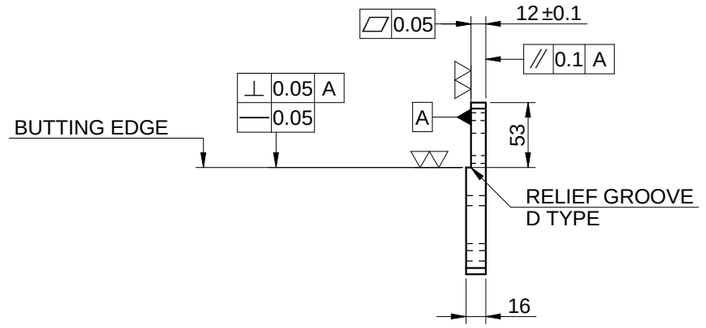

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.40 mm x 18.00 mm DEEP	
A.2	-35.00	0.00	Ø 6.40 mm x 18.00 mm DEEP	
A.3	-35.00	35.00	Ø 6.40 mm x 18.00 mm DEEP	
A.4	0.00	35.00	Ø 6.40 mm x 18.00 mm DEEP	
A.5	-646.00	0.00	Ø 6.40 mm x 18.00 mm DEEP	
A.6	-611.00	0.00	Ø 6.40 mm x 18.00 mm DEEP	
A.7	-646.00	35.00	Ø 6.40 mm x 18.00 mm DEEP	
A.8	-611.00	35.00	Ø 6.40 mm x 18.00 mm DEEP	
A.9	-340.50	0.00	Ø 6.40 mm x 18.00 mm DEEP	
A.10	-305.50	0.00	Ø 6.40 mm x 18.00 mm DEEP	
A.11	-340.50	35.00	Ø 6.40 mm x 18.00 mm DEEP	
A.12	-305.50	35.00	Ø 6.40 mm x 18.00 mm DEEP	
B.1	-38.00	-78.50	Ø 8.40 mm x 18.00 mm DEEP	
B.2	2.00	-78.50	Ø 8.40 mm x 18.00 mm DEEP	
B.3	-38.00	-33.50	Ø 8.40 mm x 18.00 mm DEEP	
B.4	2.00	-33.50	Ø 8.40 mm x 18.00 mm DEEP	
B.5	-648.00	-78.50	Ø 8.40 mm x 18.00 mm DEEP	
B.6	-608.00	-78.50	Ø 8.40 mm x 18.00 mm DEEP	
B.7	-648.00	-33.50	Ø 8.40 mm x 18.00 mm DEEP	
B.8	-608.00	-33.50	Ø 8.40 mm x 18.00 mm DEEP	

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

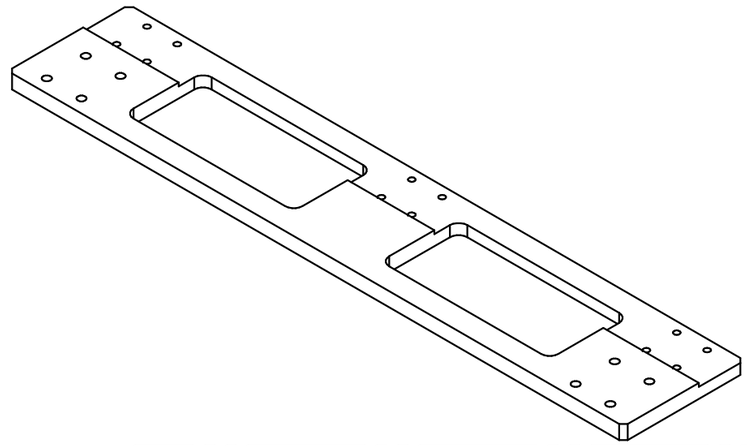

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

RESERVED SPACE FOR CONTROLLED COPY STAMP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **10K_DUNNAGE DOOR LM BLK MTG PLT_01**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
270.11 in^2	I.Z.B.P. (TRIVALENT)	▽▽	WPES	0300	PL-01	A3

REFERENCE DWG. --- PART CLASS. B HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03007273	03004785	03002882	M.S.	**P24BSA064529**	**00**	1 : 5
01/10/2025	01/10/2025	01/10/2025	NET WEIGHT-Kg 7.14 kg			SHEET 1 OF 1

\\srv01102\ExDM Uploading\2024-25\P24BS\10K_DUNNAGE DOOR LM BLK MTG PLT_01.dft