NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00



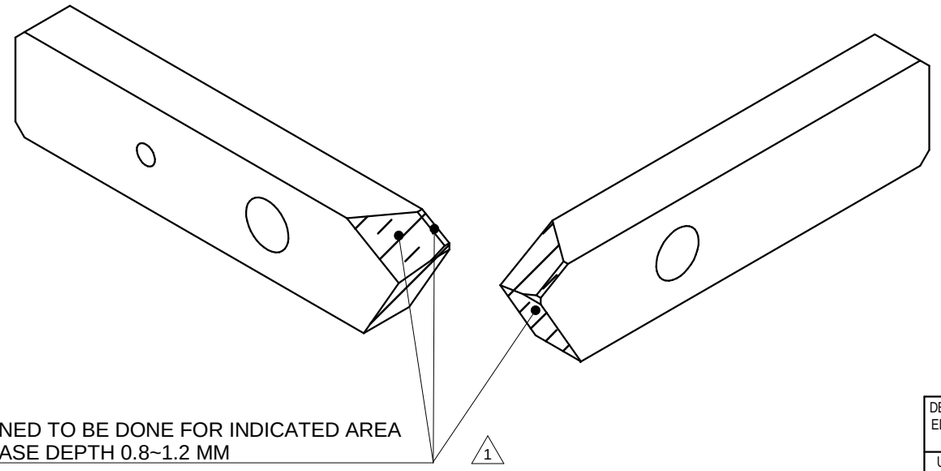

INDUCTION HARDENED TO BE DONE FOR INDICATED AREA
UPTO 50~55 HRC CASE DEPTH 0.8~1.2 MM

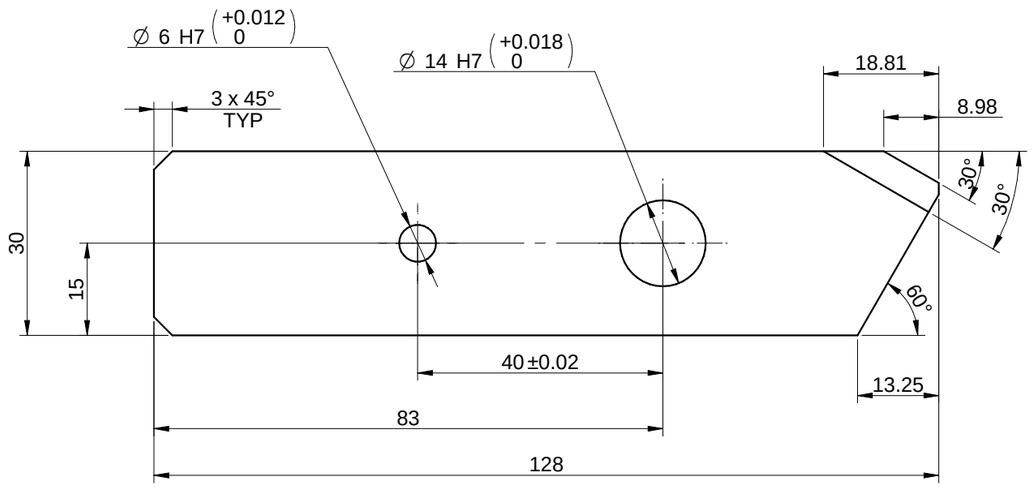

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

△1

HEAT TREATMENT NOTE:-

1) PROFILE CUTTING SHOULD BE DONE.
2) TO BE CASE CARBURISING DONE.
2) TO BE INDUCTION HARDENED UPTO 50 ~ 55 HRC.
3) CASE DEPTH 0.8~ 1.2 mm.

REVISION	DESCRIPTION	DATE	DRN.BY
△1	MATERIAL & HEAT TREATMENT NOTE CHANGED. (WAS C-45)	10/04/2026	80152056

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

RESERVED SPACE FOR CONTROLLED COPY STAMP

WIPRO PARI GROUP

DESCRIPTION: **20K_MODULE PALLET ANTI BACK LEAVER_01**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
19.04 in^2	I.Z.B.P. (TRIVALENT)	▽▽	WPES	0300	PL-01	A3

REFERENCE DWG. PRR74B124025 | PART CLASS. B | HEAT TREATMENT --

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
6330(MD)	03004785	03004785	20MnCr5 △1	**P24BSB020344**	**01**	1 : 1
10/04/2026	10/04/2026	10/04/2026	NET WEIGHT-Kg 0.41 kg			SHEET 1 OF 1

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

\\srv01102\Ex\DM Uploading\2024-25\P24BS\20K_MODULE PALLET ANTI BACK LEAVER_01.dft