NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

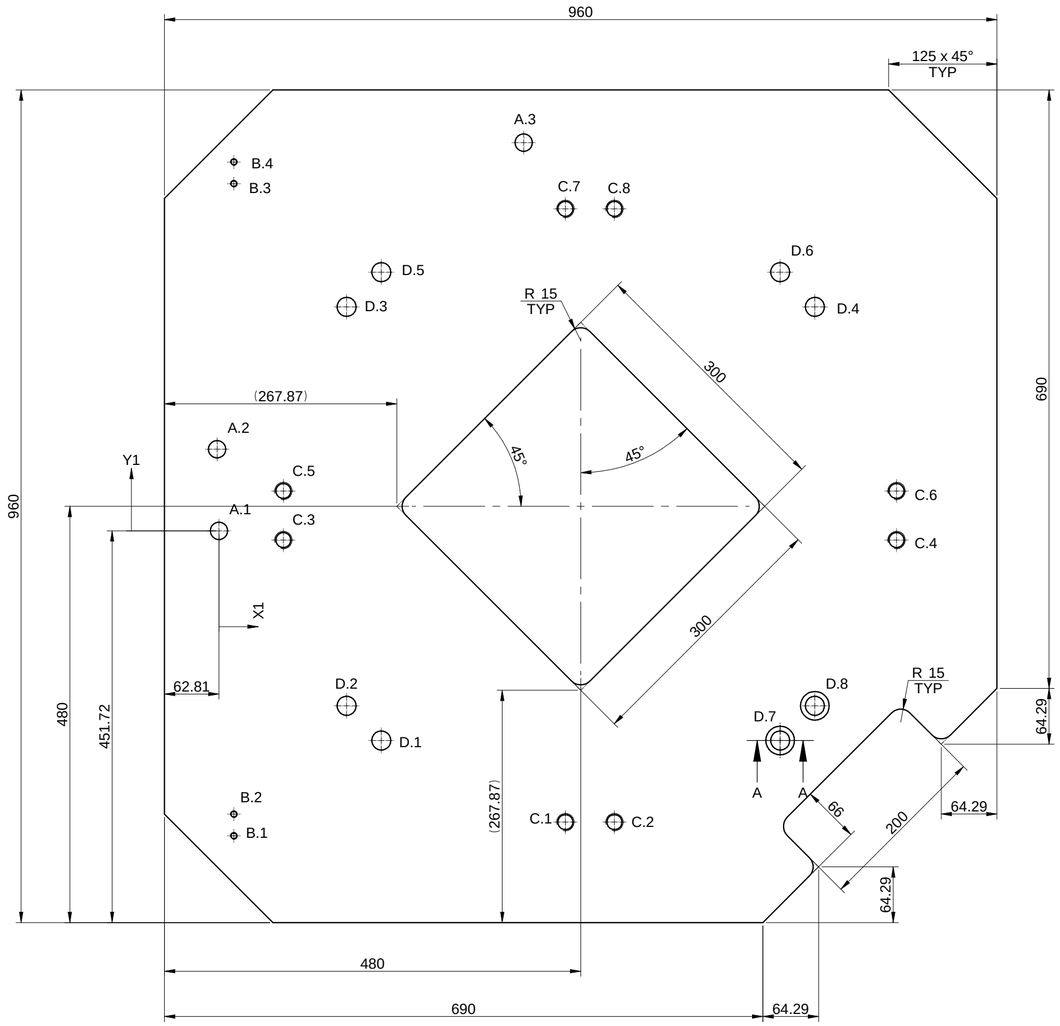

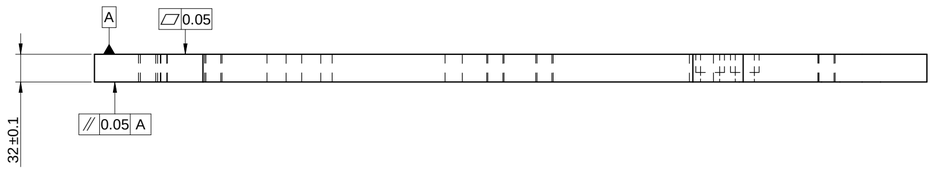



SECTION A-A
SCALE 1:5

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 20.00 mm THRU'	H7
A.2	-2.12	94.05	Ø 20.00 mm THRU'	H7
A.3	351.43	447.60	Ø 20.00 mm THRU'	H7
B.1	17.19	-351.72	M8 THRU'	
B.2	17.19	-326.72	M8 THRU'	
B.3	17.19	400.28	M8 THRU'	
B.4	17.19	425.28	M8 THRU'	
C.1	399.52	-335.88	M20 THRU'	
C.2	456.08	-335.88	M20 THRU'	
C.3	74.25	-10.61	M20 THRU'	
C.4	781.35	-10.61	M20 THRU'	
C.5	74.25	45.96	M20 THRU'	
C.6	781.35	45.96	M20 THRU'	
C.7	399.52	371.23	M20 THRU'	
C.8	456.08	371.23	M20 THRU'	
D.1	187.19	-241.72	Ø 22.00 mm THRU'	
D.2	147.19	-201.72	Ø 22.00 mm THRU'	
D.3	147.19	258.28	Ø 22.00 mm THRU'	
D.4	687.19	258.28	Ø 22.00 mm THRU'	
D.5	187.19	298.28	Ø 22.00 mm THRU'	
D.6	647.19	298.28	Ø 22.00 mm THRU'	
D.7	647.19	-241.72	Ø 22.00 mm THRU' C'BORE Ø 33.00 mm - 21.00 mm DEEP	REF SECTION A-A
D.8	687.19	-201.72	Ø 22.00 mm THRU' C'BORE Ø 33.00 mm - 21.00 mm DEEP	REF SECTION A-A

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

#NOTE:-CYLINDRICAL GRINDING REQURIED.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

RESERVED SPACE FOR CONTROLLED COPY STAMP

WIPRO PARI GROUP

DESCRIPTION: **ROBOT MTG TOP PLATE_01**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
2633.35 in^2	I.Z.B.P. (TRIVALENT)	▽▽	WPES	0300	PL-01	A2

REFERENCE DWG. UER000003002 | PART CLASS. B | HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006751	03004785	03002882	M.S	P24BSB020331	00	1 : 2
26/06/2025	26/06/2025	26/06/2025	NET WEIGHT-Kg 188.92 kg			SHEET 1 OF 1

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

\\snv\01043\ExDM Uploading\2024-25\P24BS\20K_ROBOT MTG TOP PLATE_01.dft