NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00FR-DES-006-00

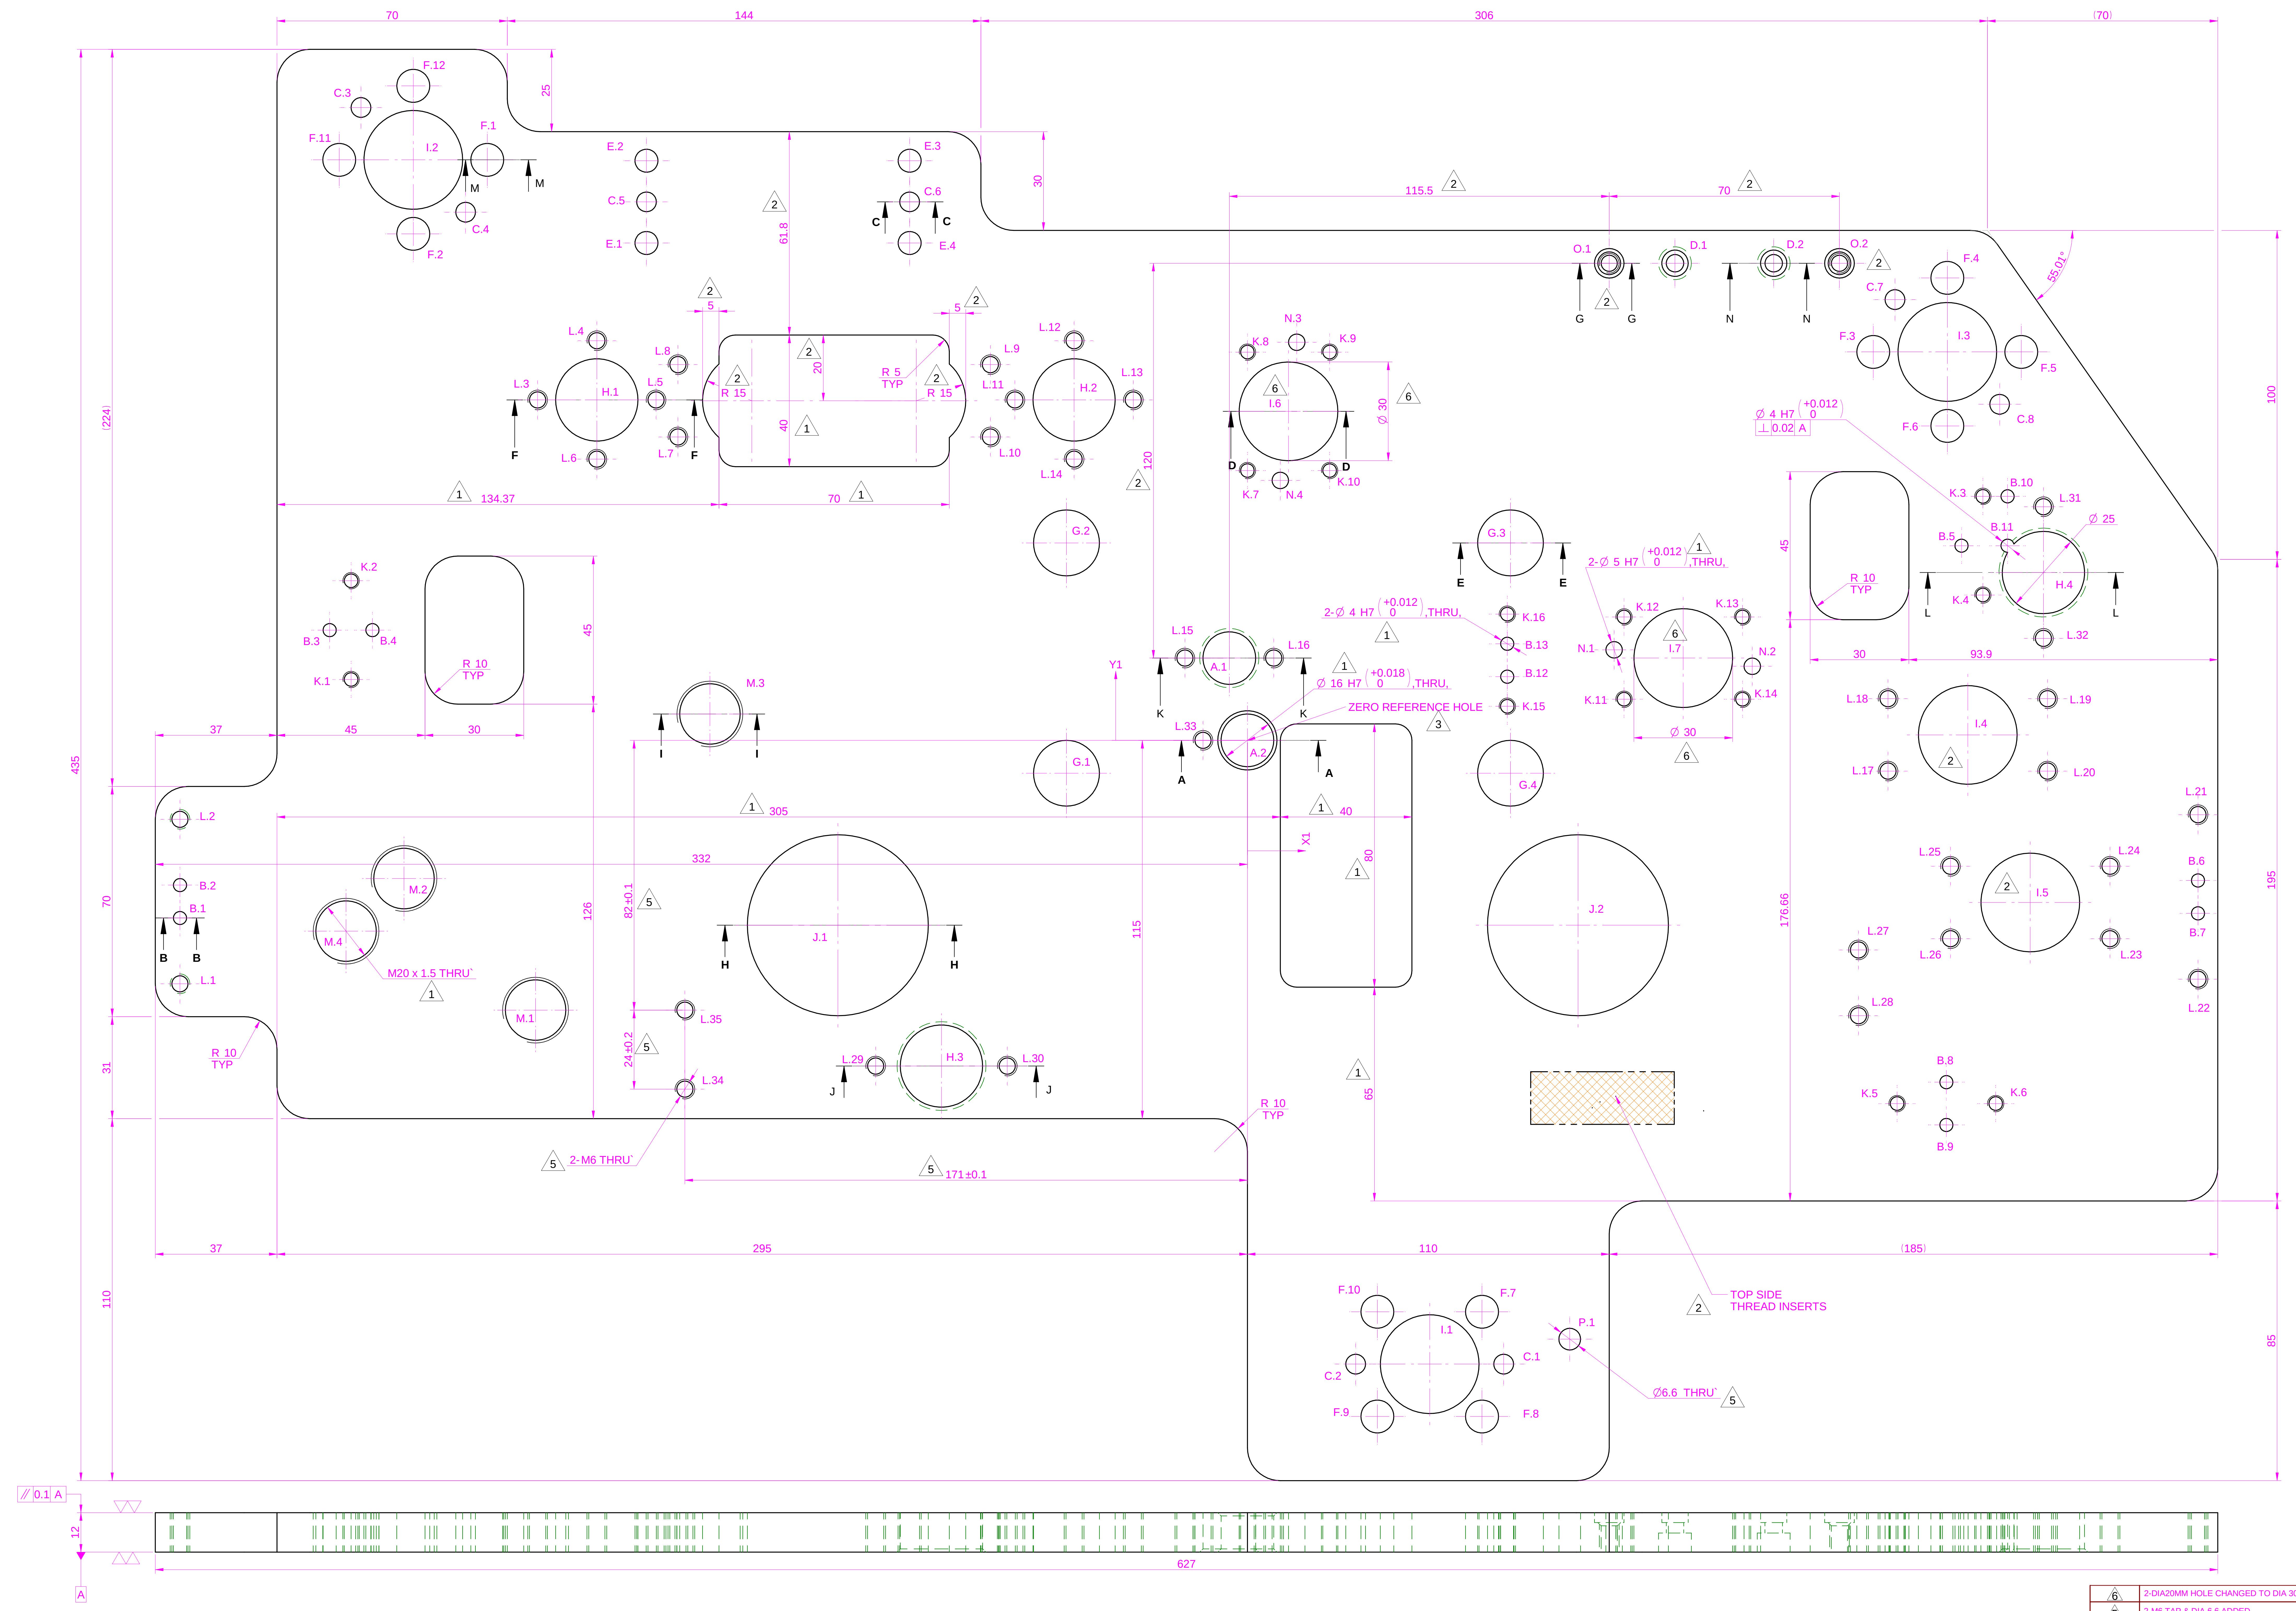

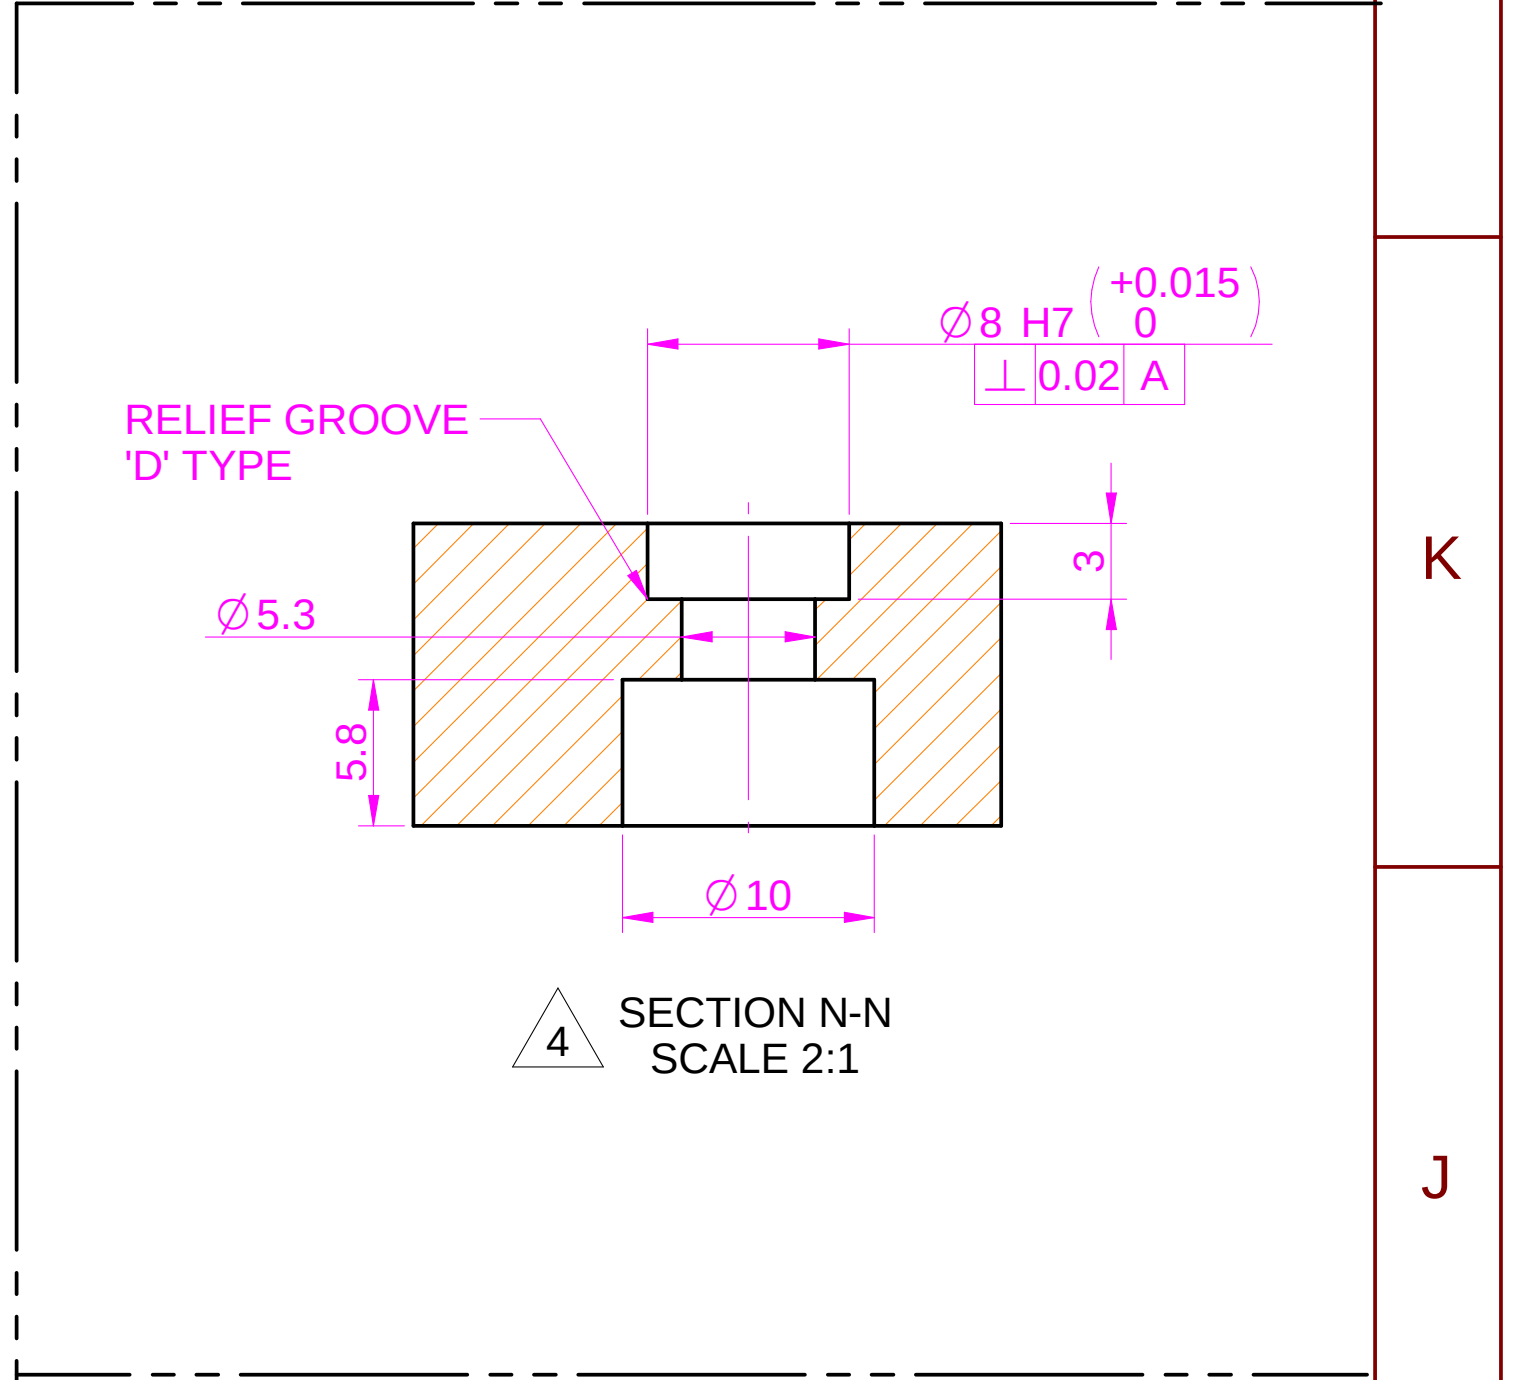

SECTION N-N
SCALE 2:1

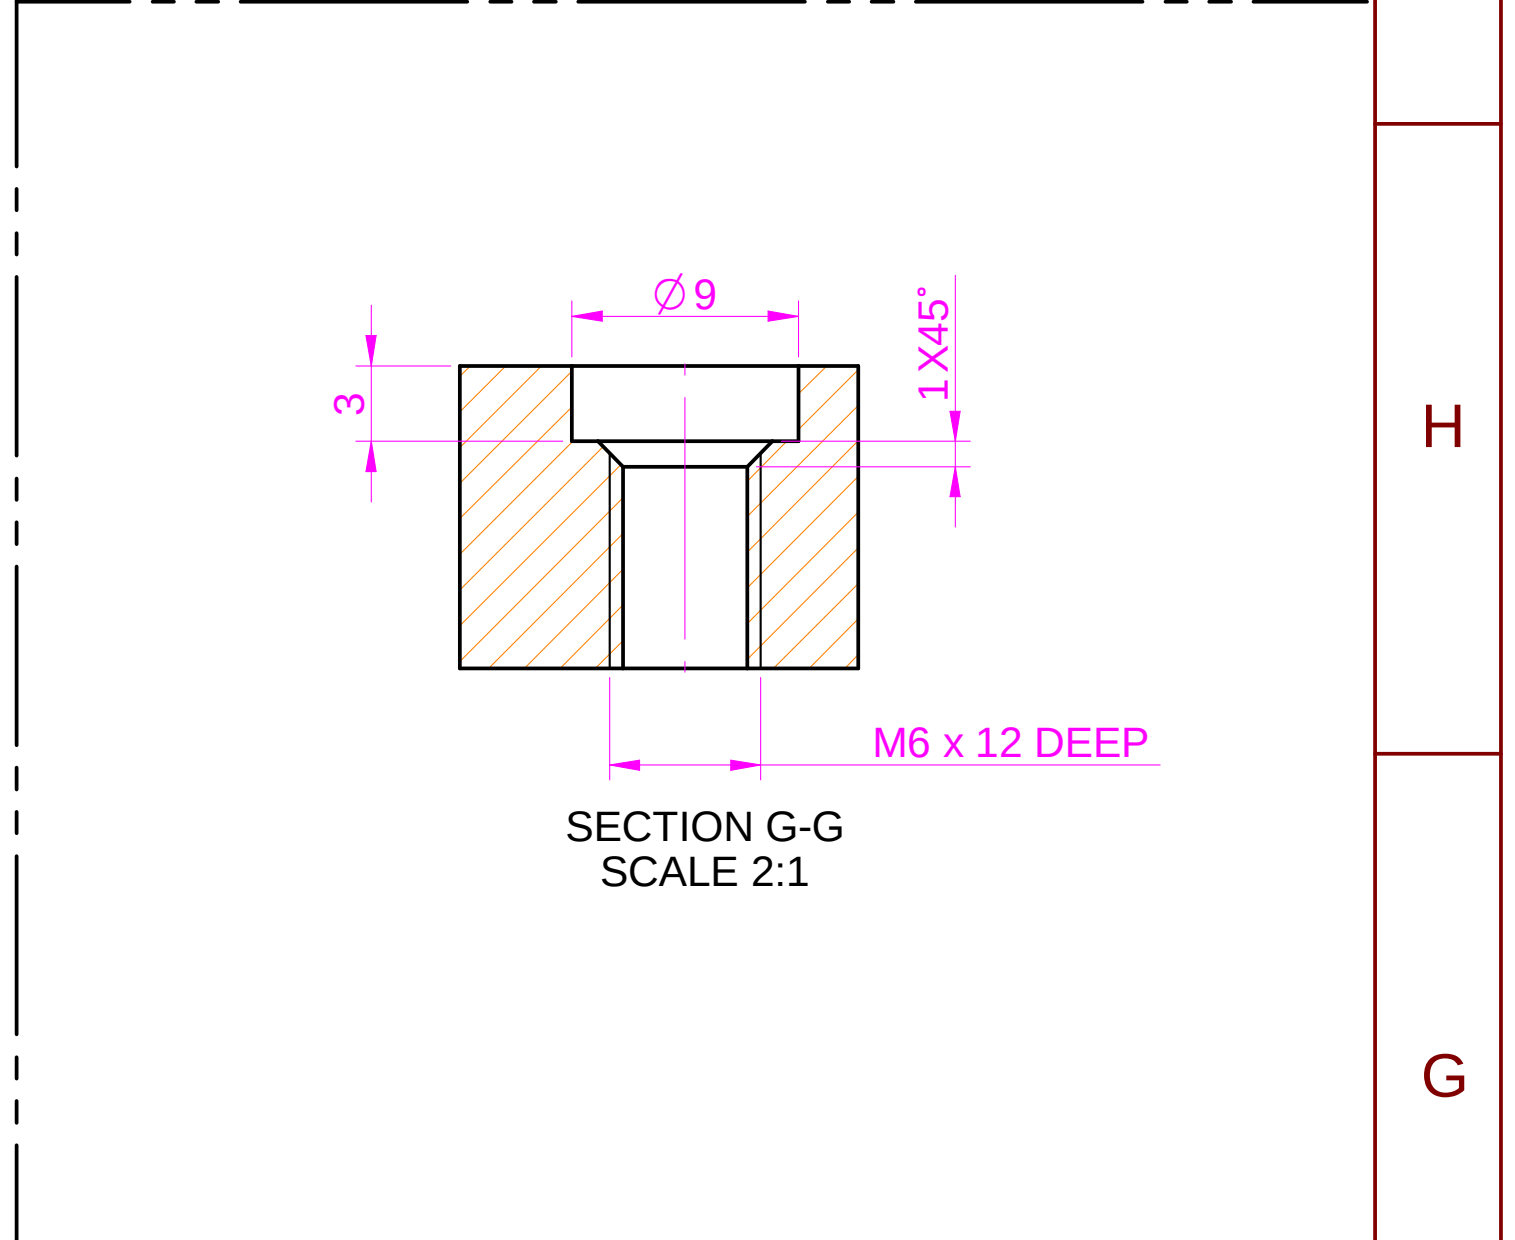

SECTION G-G
SCALE 2:1

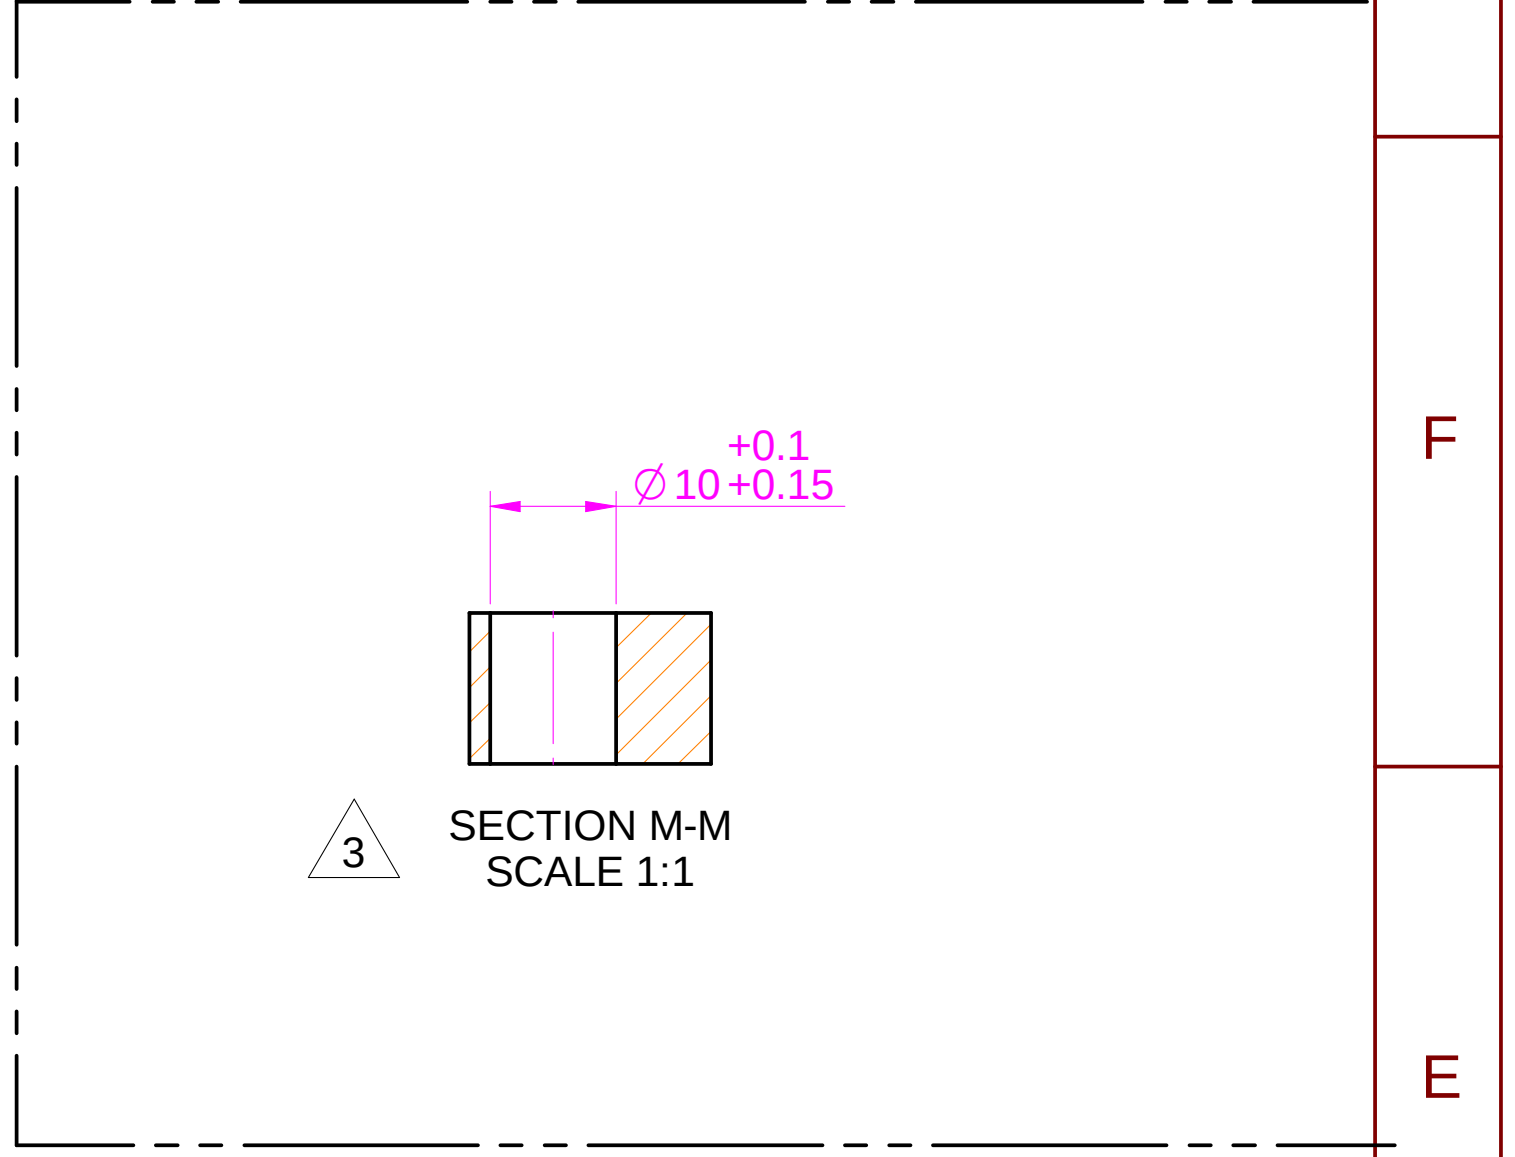

SECTION M-M
SCALE 1:1

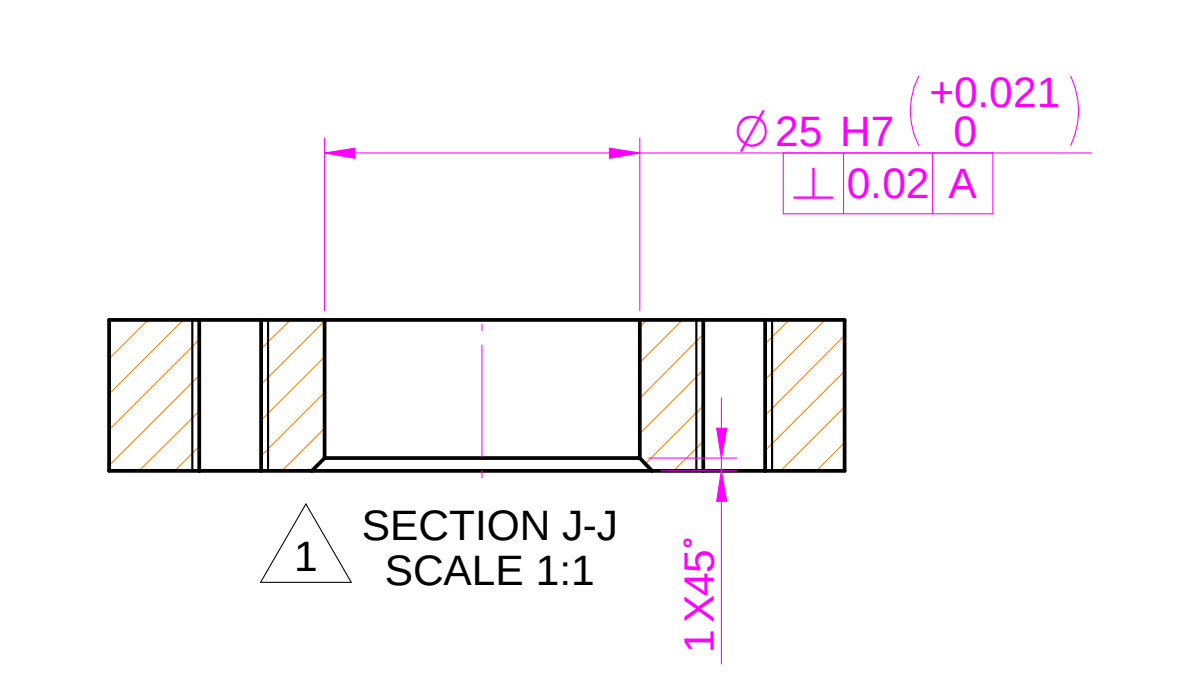

SECTION J-J
SCALE 1:1

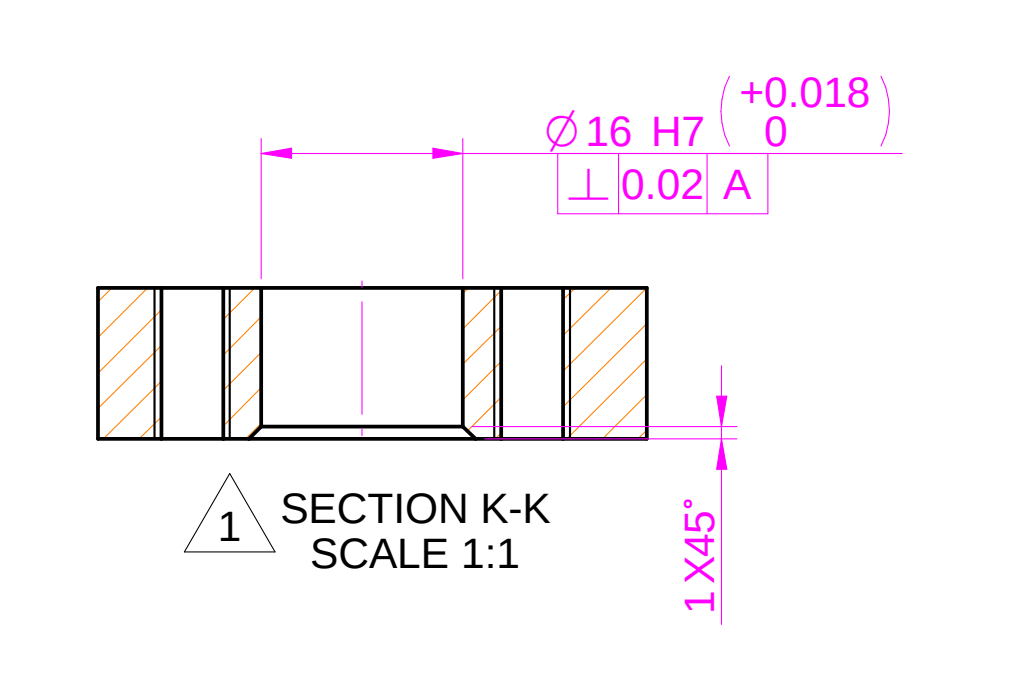

SECTION K-K
SCALE 1:1

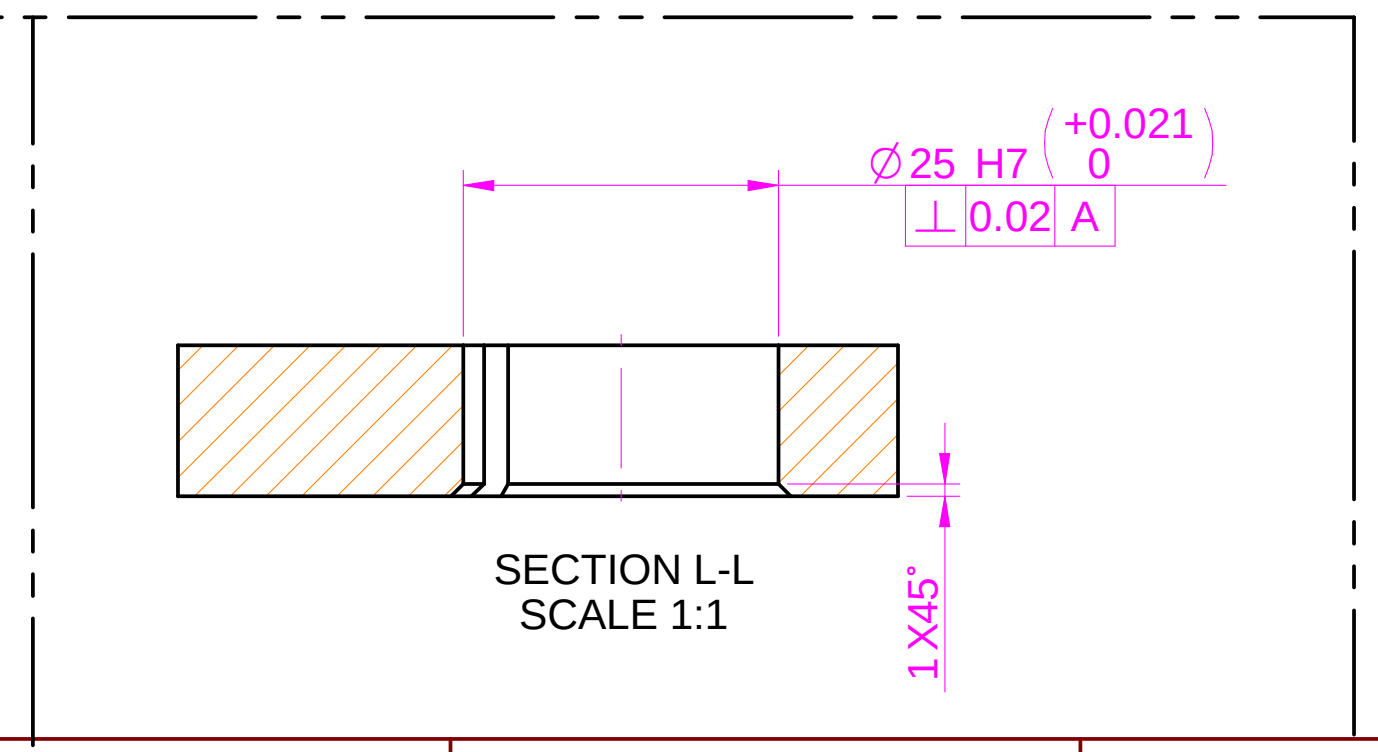

SECTION L-L
SCALE 1:1

TO BE USED THREAD INSERTS MAKE Kerb Konus

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

RESERVED SPACE
FOR
CONTROLLED COPY
STAMP

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
6	2-DIA20MM HOLE CHANGED TO DIA 30 MM REF.(I6,I7) IN HOLE TABLE	22.09.2025	02009474
5	2-M6 TAP & DIA.6.6 ADDED.	8.8.2025	03002987
4	SECTION N-N ADDED FOR HOLE DETAILS ON SHT 1	4.7.2025	03002987
3	ZERO REF. CHANGED. F1 TO F10 TOL.H7 REMOVED & SEC. M-M ADDED.	30.6.2025	03002987
2	THREAD INSERTS TOP SIDE SHOWN.SECT. G-G,HOLE I4,I5,HOLE O1,O2 ADDED	25.6.2025	03002987
1	ZERO REF. HOLE CHANGED. ALMOST TOTAL PLATE CHANGED.	16.5.2025	03002987

www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION
GRIPPER BASE PLATE

DRAWING TYPE
MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
605.94 in^2	SELF-ANODIZING	▽(▽▽)	WPR	0200	PL-01	A1

REFERENCE DWG. ---
PART CLASS. B
HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
MHL	03007240	03007240	HE30	P24BSD050115	06	1 : 1
22/09/2025	22/09/2025	22/09/2025	NET WEIGHT-Kg 5.13 kg			SHEET 1 OF 2

\\srv01102\ExDM Uploading\2024-25\P24BS\42k HANDLING GRIPPER BASE PLATEPart1.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	-5.50	25.00	Ø 16.00 mm THRU'	REF. SEC. A-A
A.2	0.00	0.00	Ø 16.00 mm THRU'	REF. SEC. A-A
B.1	-324.50	-54.00	Ø 4.00 mm THRU'	H7 (REF. SEC. B-B)
B.2	-324.50	-44.00	Ø 4.00 mm THRU'	H7 (REF. SEC. B-B)
B.3	-279.00	33.50	Ø 4.00 mm THRU'	H7 (REF. SEC. B-B)
B.4	-266.00	33.50	Ø 4.00 mm THRU'	H7 (REF. SEC. B-B)
B.5	217.10	59.16	Ø 4.00 mm THRU'	H7 (REF. SEC. B-B)
B.6	289.00	-42.59	Ø 4.00 mm THRU'	H7 (REF. SEC. B-B)
B.7	289.00	-52.59	Ø 4.00 mm THRU'	H7 (REF. SEC. B-B)
B.8	212.50	-103.90	Ø 4.00 mm THRU'	H7 (REF. SEC. B-B)
B.9	212.50	-116.90	Ø 4.00 mm THRU'	H7 (REF. SEC. B-B)
B.10	231.10	74.16	Ø 4.00 mm THRU'	H7
B.11	231.10	59.16	Ø 4.00 mm THRU'	H7
B.12	79.00	19.35	Ø 4.00 mm THRU'	H7
B.13	79.00	29.35	Ø 4.00 mm THRU'	H7
C.1	77.92	-189.59	Ø 6.00 mm THRU'	H7 (REF. SEC. C-C)
C.2	32.92	-189.59	Ø 6.00 mm THRU'	H7 (REF. SEC. C-C)
C.3	-269.49	192.34	Ø 6.00 mm THRU'	H7 (REF. SEC. C-C)
C.4	-237.67	160.52	Ø 6.00 mm THRU'	H7 (REF. SEC. C-C)
C.5	-182.68	163.66	Ø 6.00 mm THRU'	H7 (REF. SEC. C-C)
C.6	-102.68	163.66	Ø 6.00 mm THRU'	H7 (REF. SEC. C-C)
C.7	196.87	133.96	Ø 6.00 mm THRU'	H7 (REF. SEC. C-C)
C.8	228.69	102.14	Ø 6.00 mm THRU'	H7 (REF. SEC. C-C)
K.1	-272.50	18.50	M5 THRU'	
K.2	-272.50	48.50	M5 THRU'	
K.3	223.60	74.16	M5 THRU'	
K.4	223.60	44.16	M5 THRU'	
K.5	197.50	-110.40	M5 THRU'	
K.6	227.50	-110.40	M5 THRU'	
△3 F.1	-231.08	176.43	Ø 10.00 mm THRU'	
△3 F.2	-253.58	153.93	Ø 10.00 mm THRU'	
△3 F.3	190.28	118.05	Ø 10.00 mm THRU'	
△3 F.4	212.78	140.55	Ø 10.00 mm THRU'	
△3 F.5	235.28	118.05	Ø 10.00 mm THRU'	
△3 F.6	212.78	95.55	Ø 10.00 mm THRU'	
△3 F.7	71.33	-173.68	Ø 10.00 mm THRU'	
△3 F.8	71.33	-205.50	Ø 10.00 mm THRU'	
△3 F.9	39.51	-205.50	Ø 10.00 mm THRU'	
△3 F.10	39.51	-173.68	Ø 10.00 mm THRU'	
G.1	-55.00	-10.00	Ø 20.00 mm THRU'	H7
G.2	-55.00	60.00	Ø 20.00 mm THRU'	H7
G.3	80.00	60.00	Ø 20.00 mm THRU'	H7
G.4	80.00	-10.00	Ø 20.00 mm THRU'	H7
H.1	-197.78	103.46	Ø 25.00 mm THRU'	H7
H.2	-52.68	103.46	Ø 25.00 mm THRU'	H7
H.3	-93.00	-99.00		H7 (REF. SEC. J-J)
H.4	242.00	51.00		H7 (REF. SEC. J-J)
I.1	55.42	-189.59	Ø 30.00 mm THRU'	
I.2	-253.58	176.43	Ø 30.00 mm THRU'	
I.3	212.78	118.05	Ø 30.00 mm THRU'	
△2 I.4	219.00	1.66	Ø 30.00 mm THRU'	
△2 I.5	238.00	-49.29	Ø 30.00 mm THRU'	
△6 I.6	12.50	100.00	Ø 30.00 mm THRU'	
△6 I.7	132.50	25.00	Ø 30.00 mm THRU'	
J.1	-124.50	-56.20	Ø 55.00 mm THRU'	
J.2	100.50	-56.20	Ø 55.00 mm THRU'	
K.7	0.00	82.00	M5 THRU'	
K.8	0.00	118.00	M5 THRU'	
K.9	25.00	118.00	M5 THRU'	
K.10	25.00	82.00	M5 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
K.11	114.50	12.50	M5 THRU'	
K.12	114.50	37.50	M5 THRU'	
K.13	150.50	37.50	M5 THRU'	
K.14	150.50	12.50	M5 THRU'	
K.15	79.00	10.35	M5 THRU'	
K.16	79.00	38.35	M5 THRU'	
L.1	-324.50	-74.00	M6 x 12.00 mm DEEP	
L.2	-324.50	-24.00	M6 x 12.00 mm DEEP	
L.3	-215.78	103.46	M6 THRU'	
L.4	-197.78	121.46	M6 THRU'	
L.5	-179.78	103.46	M6 THRU'	
L.6	-197.78	85.46	M6 THRU'	
L.7	-173.13	92.20	M6 THRU'	
L.8	-173.13	114.20	M6 THRU'	
L.9	-78.13	114.20	M6 THRU'	
L.10	-78.13	92.20	M6 THRU'	
L.11	-70.68	103.46	M6 THRU'	
L.12	-52.68	121.46	M6 THRU'	
L.13	-34.68	103.46	M6 THRU'	
L.14	-52.68	85.46	M6 THRU'	
L.15	-19.00	25.00	M6 THRU'	
L.16	8.00	25.00	M6 THRU'	
L.17	194.75	-9.34	M6 THRU'	
L.18	194.75	12.66	M6 THRU'	
L.19	243.25	12.66	M6 THRU'	
L.20	243.25	-9.34	M6 THRU'	
L.21	289.00	-22.59	M6 THRU'	
D.1 △4	130.00	145.00	Ø 8.00 mm x 3.00 mm DEEP	H7 (REF. SEC. N-N) △4
D.2 △4	160.00	145.00	Ø 8.00 mm x 3.00 mm DEEP	H7 (REF. SEC. N-N) △4
E.1	-182.68	151.16	Ø 7.00 mm THRU'	
E.2	-182.68	176.16	Ø 7.00 mm THRU'	
E.3	-102.68	176.16	Ø 7.00 mm THRU'	
E.4	-102.68	151.16	Ø 7.00 mm THRU'	
F.11	-276.08	176.43	Ø 10.00 mm THRU'	H7
F.12	-253.58	198.93	Ø 10.00 mm THRU'	H7
L.22	289.00	-72.59	M6 THRU'	
L.23	262.25	-60.29	M6 THRU'	
L.24	262.25	-38.29	M6 THRU'	
L.25	213.75	-38.29	M6 THRU'	
L.26	213.75	-60.29	M6 THRU'	
L.27	185.77	-63.70	M6 x 12.00 mm DEEP	
L.28	185.77	-83.70	M6 x 12.00 mm DEEP	
L.29	-113.00	-99.00	M6 THRU'	
L.30	-73.00	-99.00	M6 THRU'	
L.31	242.00	71.00	M6 THRU'	
L.32	242.00	31.00	M6 THRU'	
L.33	-13.50	0.00	M6 THRU'	
△5 L.34	-171.00	-106.00	M6 THRU'	
△5 L.35	-171.00	-82.00	M6 THRU'	
M.1	-216.41	-82.00	M20 x 1.5 THRU'	
M.2	-256.41	-42.00	M20 x 1.5 THRU'	
M.3	-163.41	8.00	M20 x 1.5 THRU'	
M.4	-274.00	-58.00	M20 x 1.5 THRU'	
N.1	111.50	27.50	Ø 5.00 mm THRU'	H7
N.2	153.50	22.50	Ø 5.00 mm THRU'	H7
N.3	15.00	121.00	Ø 5.00 mm THRU'	H7
N.4	10.00	79.00	Ø 5.00 mm THRU'	H7
△2 O.1	110.00	145.00	Ø 9.00 mm x 3.00 mm DEEP	
△2 O.2	180.00	145.00	Ø 9.00 mm x 3.00 mm DEEP	
△5 P.1	98.00	-182.00	Ø 6.60 mm THRU'	

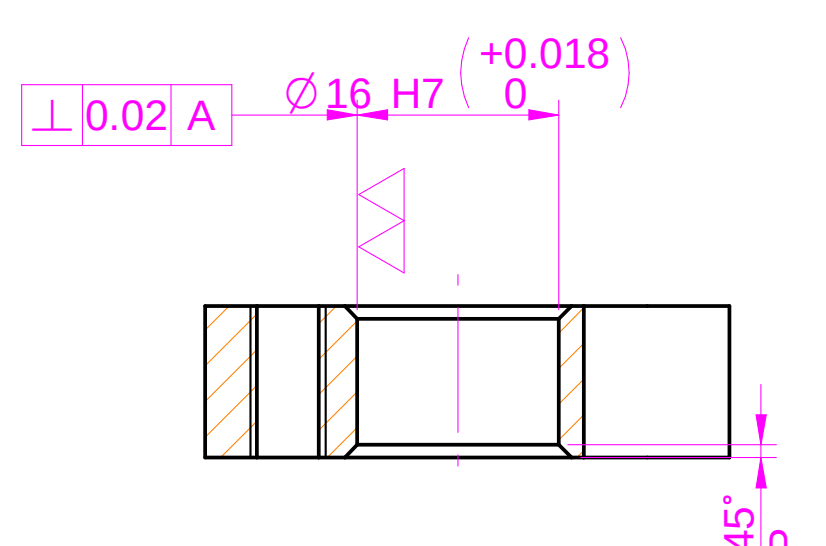

SECTION A-A
SCALE 1:1

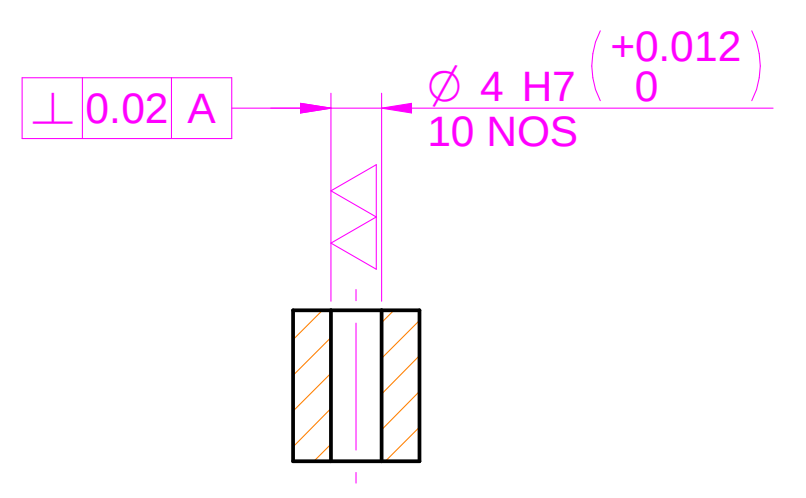

SECTION B-B
SCALE 1:1

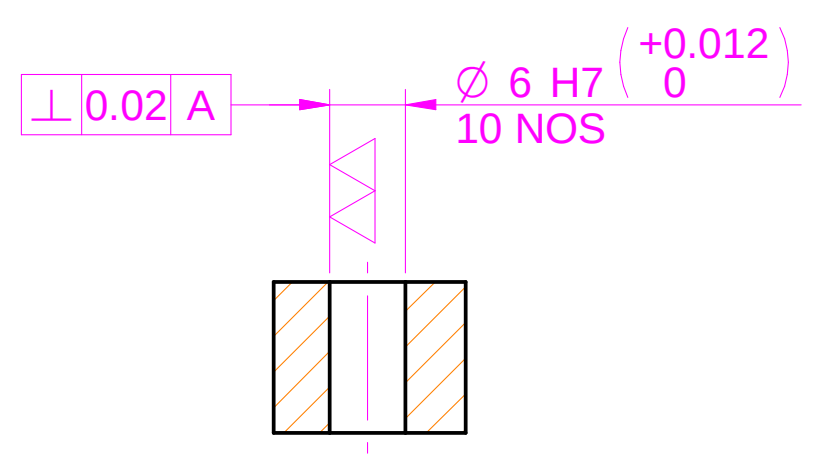

SECTION C-C
SCALE 1:1



SECTION D-D
SCALE 1:1

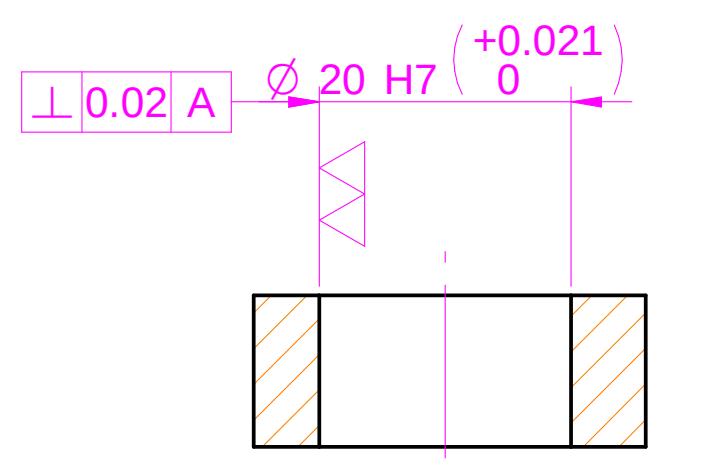

SECTION E-E
SCALE 1:1

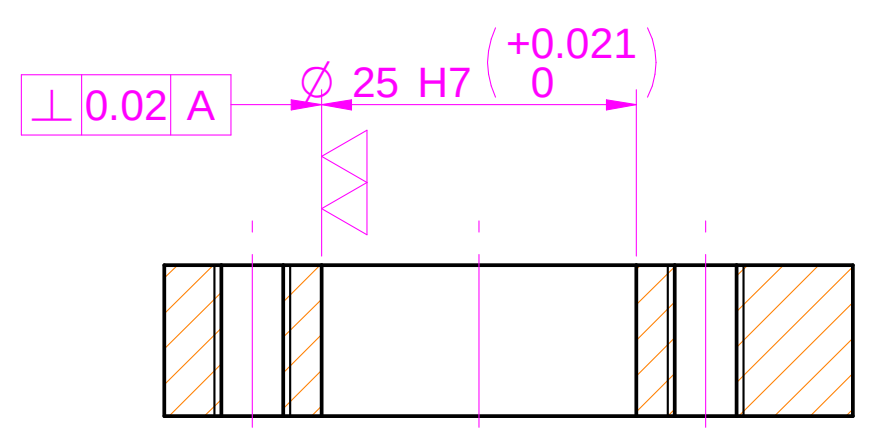

SECTION F-F
SCALE 1:1

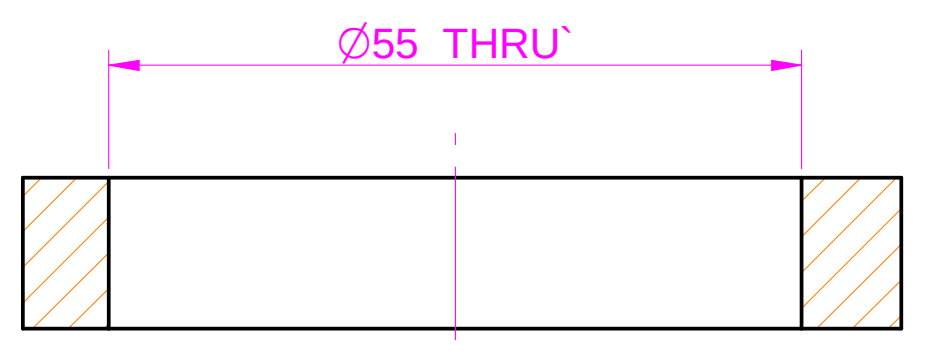

SECTION H-H
SCALE 1:1

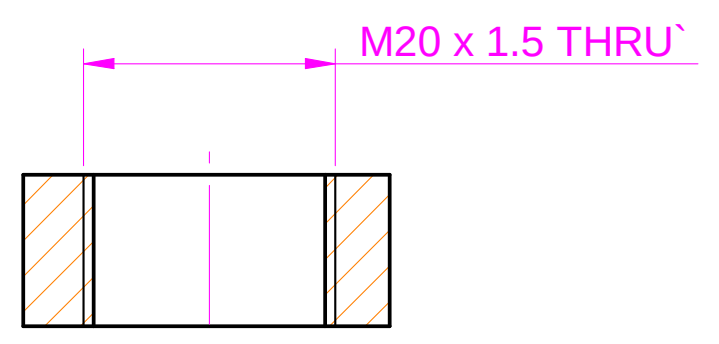

SECTION I-I
SCALE 1:1

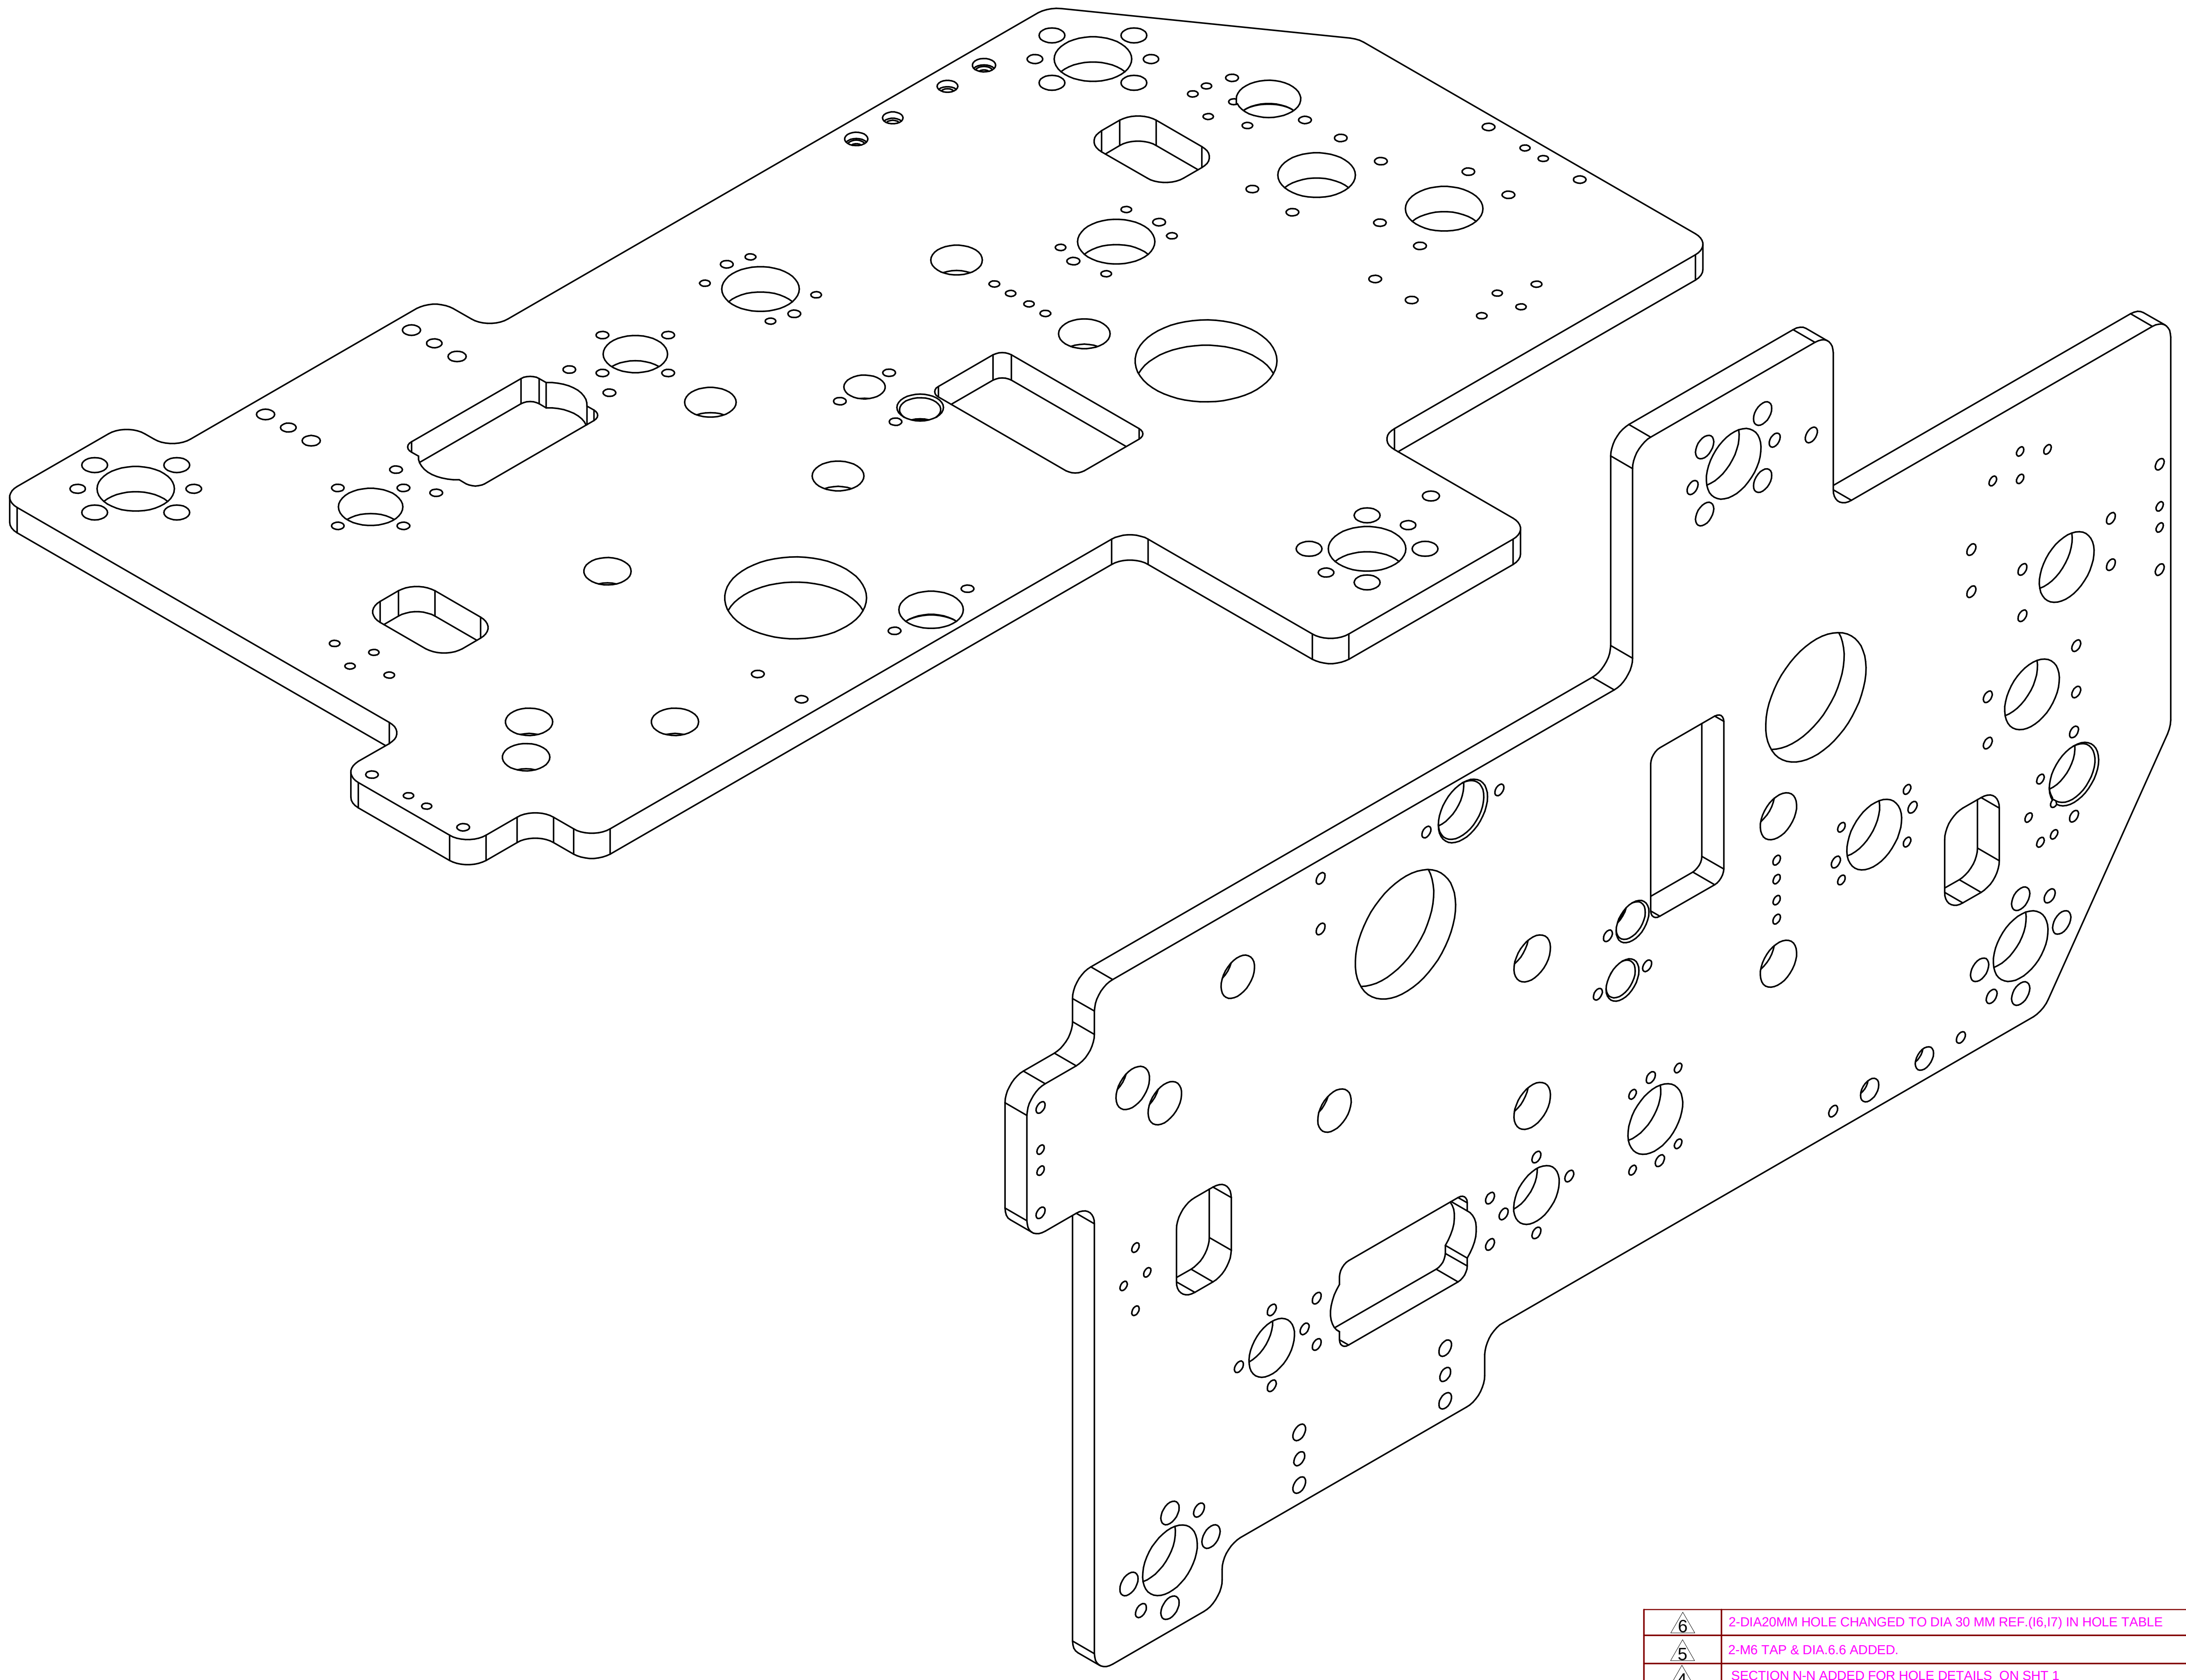

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
△6	2-DIA20MM HOLE CHANGED TO DIA 30 MM REF.(I6,I7) IN HOLE TABLE	22.09.2025	02009474
△5	2-M6 TAP & DIA.6.6 ADDED.	8.8.2025	03002987
△4	SECTION N-N ADDED FOR HOLE DETAILS ON SHT 1	4.7.2025	03002987
△3	ZERO REF. CHANGED. F1 TO F10 TOL.H7 REMOVED & SEC. M-M ADDED.	30.6.2025	03002987
	THREAD INSERTS TOP SIDE SHOWN.SECT. G-G,HOLE I4,I5,HOLE O1,O2 ADDED	25.6.2025	03002987
△1	ZERO REF. HOLE CHANGED. ALMOST TOTAL PLATE CHANGED.	16.5.2025	03002987

RESERVED SPACE
FOR
CONTROLLED COPY
STAMP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION GRIPPER BASE PLATE							DRAWING TYPE MACHINING
SURFACE AREA 605.94 in^2	SURFACE TREATMENT SELF-ANODIZING	MACHINING ▽(▽▽)	DESIGN UNIT WPR	DESIGN UNIT CD. 0200		TEAM NO. PL-01	SHEET SIZE A1
REFERENCE DWG. ---		PART CLASS. B	HEAT TREATMENT ---				
DRN.BY MHL 22/09/2025	CHKD.BY 03007240 22/09/2025	APPD.BY 03007240 22/09/2025	MATERIAL HE30 NET WEIGHT-Kg 5.13 kg	DRG./PART CODE P24BSD050115		REV. 06	SCALE 1 : 1 SHEET 2 OF 2

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

\\srv01102\ExDM Uploading\2024-25\P24BS\42k HANDLING GRIPPER BASE PLATEPart1.dft