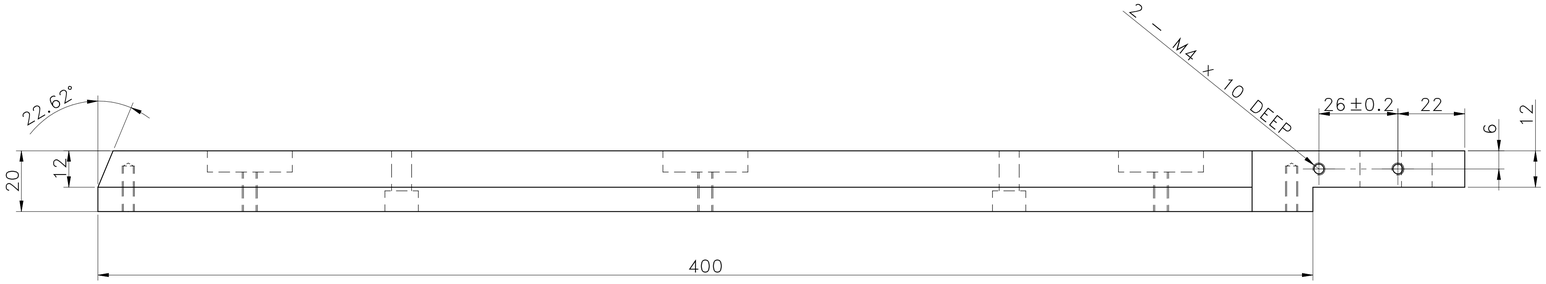

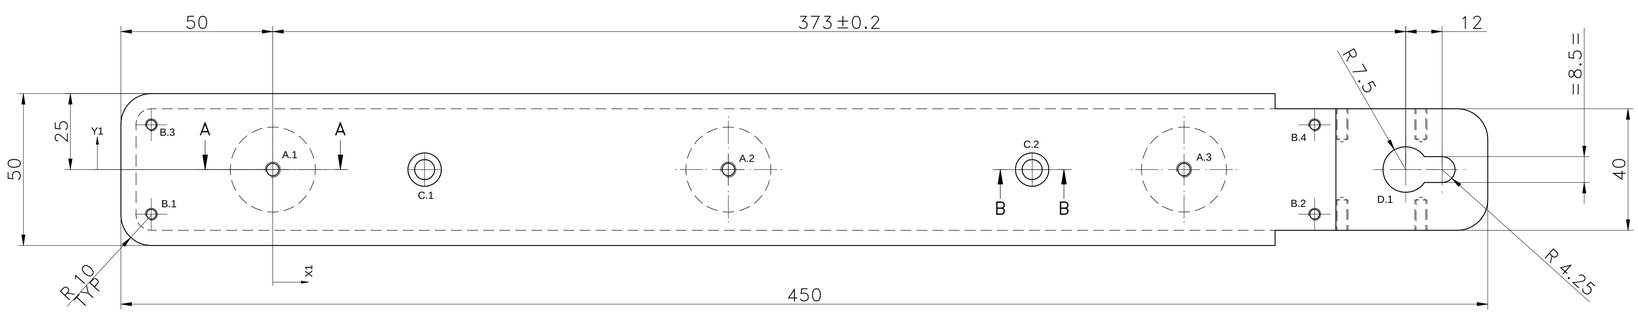
NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00





SCALE/ÉCHELLE 1:1



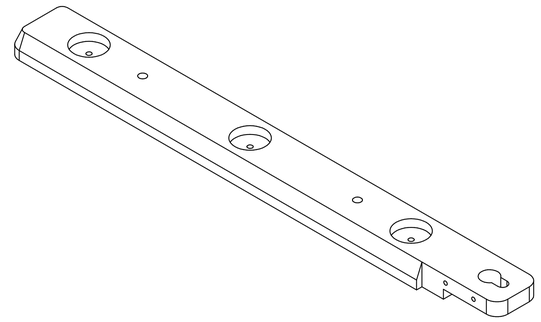

SCALE/ÉCHELLE 1:1



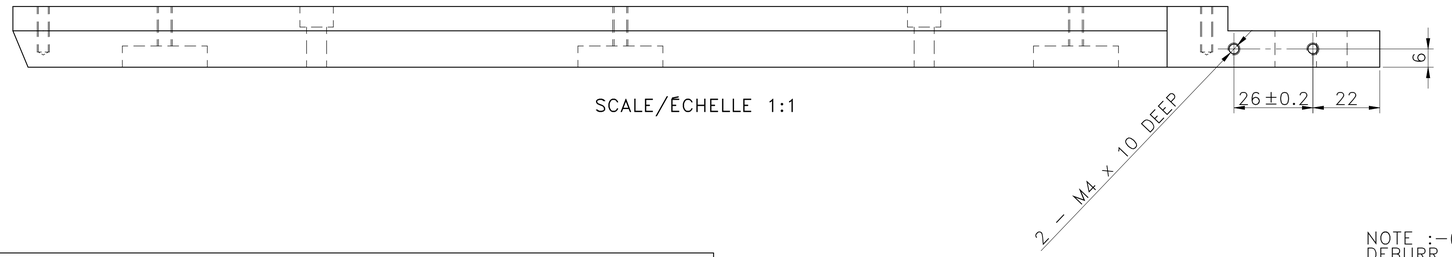

SCALE/ÉCHELLE 1:1




SECTION A–A
SCALE/ÉCHELLE 1:1



SCALE/ÉCHELLE 1:2




SCALE/ÉCHELLE 1:1

| HOLE TABLE | | | | |
|---|---|---|---|---|
| Hole | X | Y | Size | REMARK |
| A.1 | 0.00 | 0.00 | M5 THRU' | REF SECTION A–A |
| A.2 | 150.00 | 0.00 | M5 THRU' | REF SECTION A–A |
| A.3 | 300.00 | 0.00 | M5 THRU' | REF SECTION A–A |
| B.1 | –40.00 | –14.70 | M4 x 15.00 mm DEEP | |
| B.2 | 343.00 | –14.70 | M4 x 15.00 mm DEEP | |
| B.3 | –40.00 | 14.70 | M4 x 15.00 mm DEEP | |
| B.4 | 343.00 | 14.70 | M4 x 15.00 mm DEEP | |
| C.1 | 50.00 | 0.00 | Ø 6.60 mm THRU'<br>C'BORE Ø 11.00 mm – 6.80 mm DEEP | REF SECTION B–B |
| C.2 | 250.00 | 0.00 | Ø 6.60 mm THRU'<br>C'BORE Ø 11.00 mm – 6.80 mm DEEP | REF SECTION B–B |
| D.1 | 373.00 | 0.00 | | |


NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/– 0.1




SECTION B–B
SCALE/ÉCHELLE 1:1

NOTE : (English)
# MATERIAL: HE30
# FINISH: SELF–ANODIZING
# MACHINING: 3.2
# WEIGHT(Kg ): 1.07 kg

NOTE :–(French)
# MATÉRIEL : HE30
# FINITION : SELF–ANODIZING
# MACHINES : 3.2
# POIDS (Kg): 1.07 kg

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| | | | |

| DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED | |
|---|---|
| UNSP RADII | UNSP CHF. |
| 0.5 R | 0.5 X 45° |
| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm | |
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |
| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |
| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm | |
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |
| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: TORCH PLATE

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO | SHEET SIZE |
|---|---|---|---|---|---|---|
| 98.38 in^2 | # | # | WPES | 0300 | PL-01 | A1 |

| REFERENCE DWG. | --- | PART CLASS. B | HEAT TREATMENT | --- |
|---|---|---|---|---|

LOCATION : PUNE

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL | DRG./PART CODE | REV. | SCALE |
|---|---|---|---|---|---|---|
| 03006751 | 03004785 | 03002882 | # | P23Y5A057120 | 00 | 1 : |
| 04/07/2025 | 04/07/2025 | 04/07/2025 | NET WEIGHT-Kg 1.07 kg | | | SHEET 1 OF 1 |

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E,D\M Uploading\2022-23\P23Y5\P23Y5A057120.dlf