

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

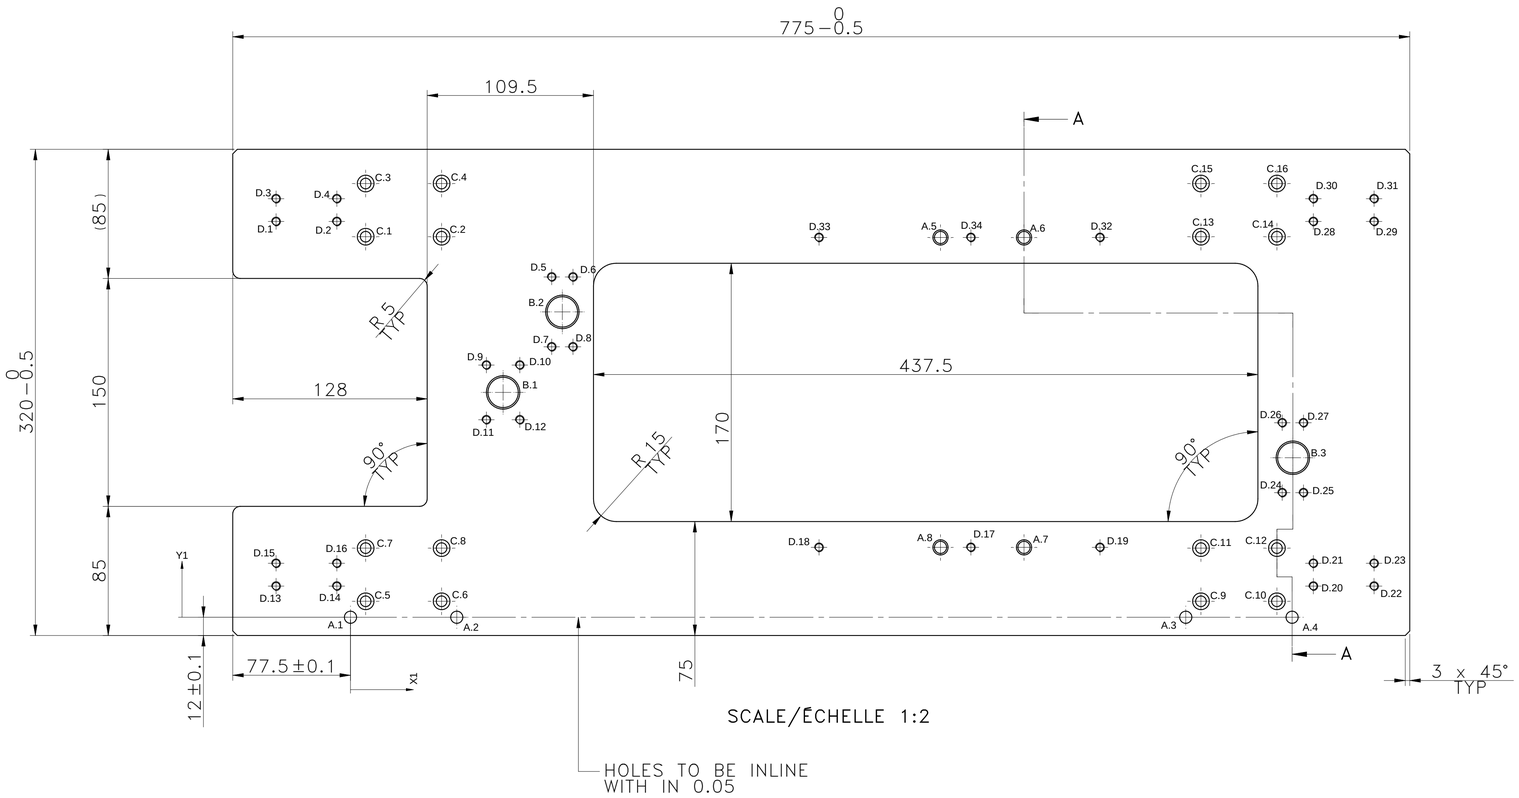


SCALE/ÉCHELLE 1:2

HOLES TO BE INLINE
WITH IN 0.05

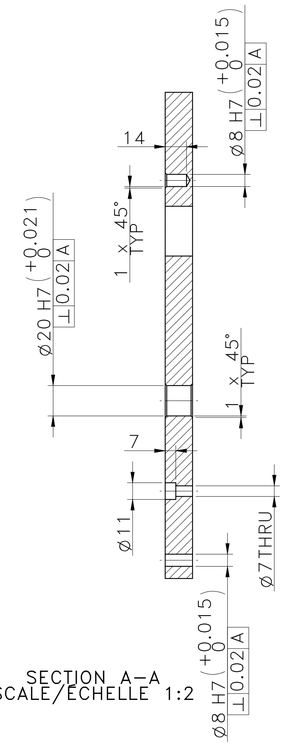

SECTION A-A
SCALE/ÉCHELLE 1:2

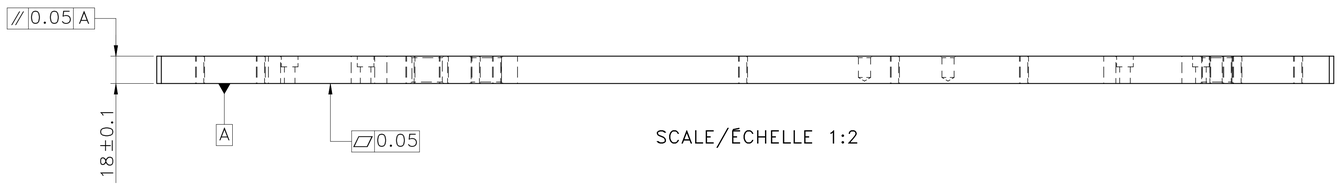

SCALE/ÉCHELLE 1:2

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: M.S
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 21.38 kg

NOTE :-(French)
MATÉRIEL : M.S
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 21.38 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR CONTROL

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm	DESCRIPTION	LIFTER MOVING PLATE				DRAWING TYPE	MACHINING
2.DO NOT SCALE DRAWING	SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
	609.33 in^2	#	#	WPES	0300	PL-02	A1
3.IF IN DOUBT , ASK TEAM MEMBER	REFERENCE DWG.	PAY43B034201	PART CLASS. B	HEAT TREATMENT		NA	
LOCATION : PUNE	DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED	9265	03004785	03002882	#	P23Y5B033009	00	1 : 2
	18/04/2024	18/04/2024	18/04/2024	NET WEIGHT-Kg 21.38 kg			SHEET 1 OF 2

\\srv0102\E:\eDM Uploading\2022-23\P23Y5\P23Y5B033009.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 8.00 mm THRU'	H7 REF.SEC A–A
A.2	70.00	0.00	Ø 8.00 mm THRU'	H7 REF.SEC A–A
A.3	550.00	0.00	Ø 8.00 mm THRU'	H7 REF.SEC A–A
A.4	620.00	0.00	Ø 8.00 mm THRU'	H7 REF.SEC A–A
A.5	388.50	250.00	Ø 8.00 mm x 14.00 mm DEEP	H7 REF.SEC A–A
A.6	443.50	250.00	Ø 8.00 mm x 14.00 mm DEEP	H7 REF.SEC A–A
A.7	443.50	46.00	Ø 8.00 mm x 14.00 mm DEEP	H7 REF.SEC A–A
A.8	388.50	46.00	Ø 8.00 mm x 14.00 mm DEEP	H7 REF.SEC A–A
B.1	100.50	148.00	Ø 20.00 mm THRU'	H7 REF.SEC A–A
B.2	139.50	201.00	Ø 20.00 mm THRU'	H7 REF.SEC A–A
B.3	620.50	105.00	Ø 20.00 mm THRU'	H7 REF.SEC A–A
C.1	10.00	250.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.2	60.00	250.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.3	10.00	285.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.4	60.00	285.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.5	10.00	10.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.6	60.00	10.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.7	10.00	45.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.8	60.00	45.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.9	560.00	10.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.10	610.00	10.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.11	560.00	45.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.12	610.00	45.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.13	560.00	250.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.14	610.00	250.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.15	560.00	285.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
C.16	610.00	285.50	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	REF.SEC A–A
D.1	–49.00	260.50	M6 THRU'	
D.2	–9.00	260.50	M6 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
D.3	–49.00	275.50	M6 THRU'	
D.4	–9.00	275.50	M6 THRU'	
D.5	132.50	224.00	M6 THRU'	
D.6	146.50	224.00	M6 THRU'	
D.7	132.50	178.00	M6 THRU'	
D.8	146.50	178.00	M6 THRU'	
D.9	89.50	166.00	M6 THRU'	
D.10	111.50	166.00	M6 THRU'	
D.11	89.50	130.00	M6 THRU'	
D.12	111.50	130.00	M6 THRU'	
D.13	–49.00	20.50	M6 THRU'	
D.14	–9.00	20.50	M6 THRU'	
D.15	–49.00	35.50	M6 THRU'	
D.16	–9.00	35.50	M6 THRU'	
D.17	408.50	46.00	M6 THRU'	
D.18	308.50	46.00	M6 THRU'	
D.19	493.50	46.00	M6 THRU'	
D.20	634.00	20.50	M6 THRU'	
D.21	634.00	35.50	M6 THRU'	
D.22	674.00	20.50	M6 THRU'	
D.23	674.00	35.50	M6 THRU'	
D.24	613.50	82.00	M6 THRU'	
D.25	627.50	82.00	M6 THRU'	
D.26	613.50	128.00	M6 THRU'	
D.27	627.50	128.00	M6 THRU'	
D.28	634.00	260.50	M6 THRU'	
D.29	674.00	260.50	M6 THRU'	
D.30	634.00	275.50	M6 THRU'	
D.31	674.00	275.50	M6 THRU'	
D.32	493.50	250.00	M6 THRU'	
D.33	308.50	250.00	M6 THRU'	
D.34	408.50	250.00	M6 THRU'	

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : (English)
MATERIAL: M.S
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING:
WEIGHT(Kg): 21.38 kg

NOTE :–(French)
MATERIEL : M.S
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES :
POIDS (Kg): 21.38 kg

RESERVED SPACE FOR CONTRO...
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm	DESCRIPTION: LIFTER MOVING PLATE
2.DO NOT SCALE DRAWING.	DRAWING TYPE: MACHINING
3.IF IN DOUBT , ASK TEAM MEMBER	REFERENCE DWG. PAY43B034201 · PART CLASS. B · HEAT TREATMENT NA
LOCATION : PUNE	

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
609.33 in^2	#	#	WPES	0300	PL-02	A1

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
9265	03004785	03002882	#	P23Y5B033009	00	1 : 2
18/04/2024	18/04/2024	18/04/2024	NET WEIGHT-Kg 21.38 kg			SHEET 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01102\Ex-DM Uploading\2022--23\P2375\P23Y5B033009.dft