


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

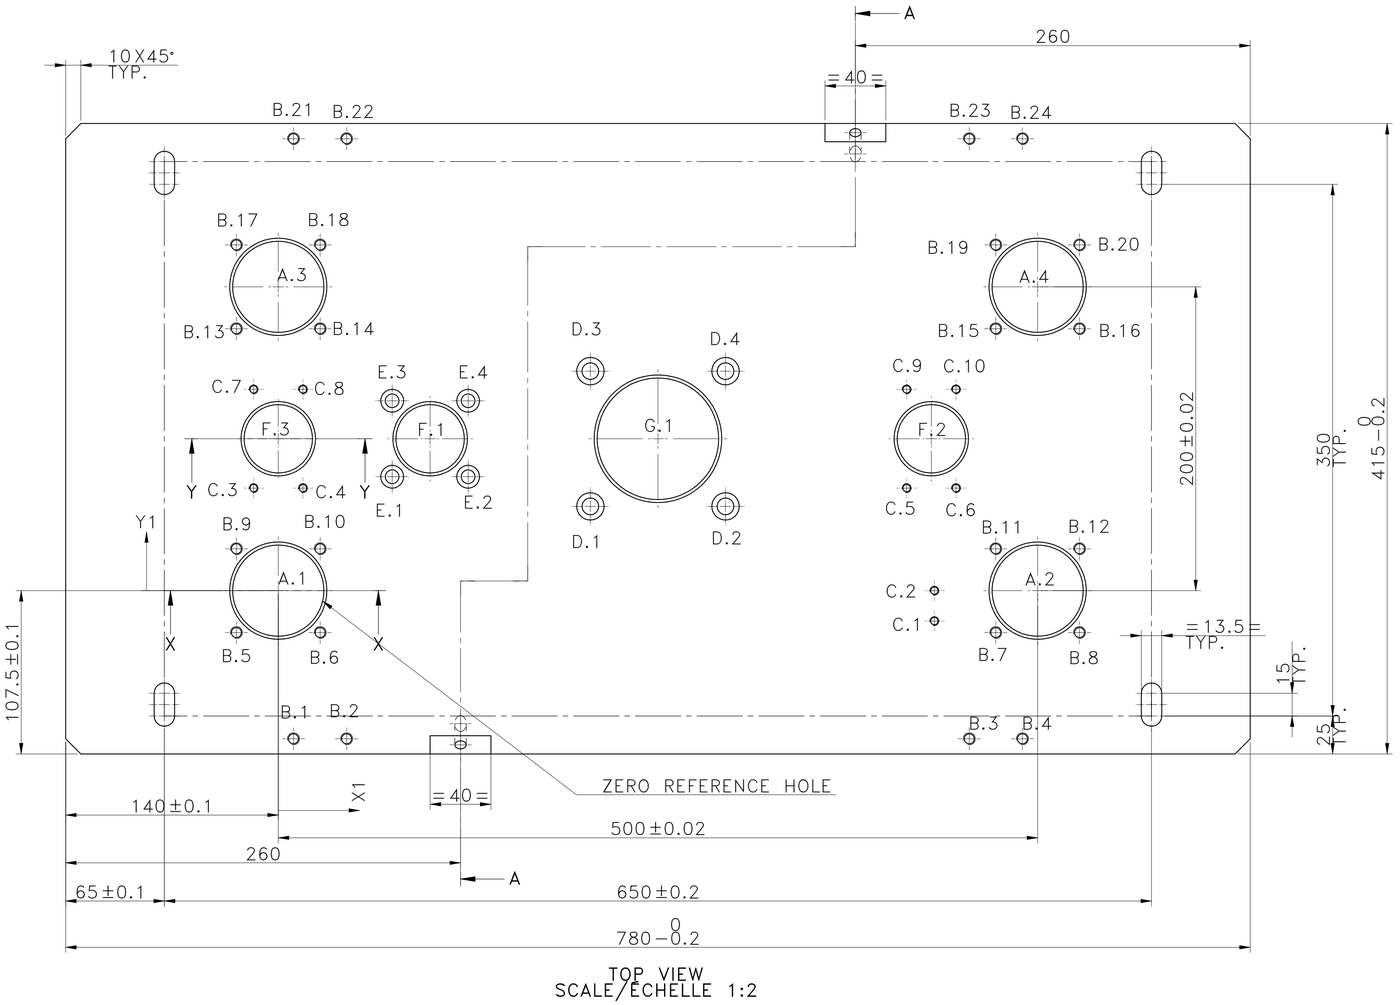


TOP VIEW
SCALE/ECHELLE 1:2

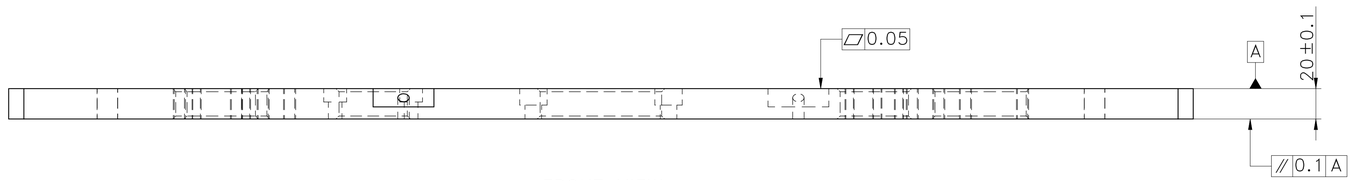


FRONT VIEW
SCALE/ECHELLE 1:2

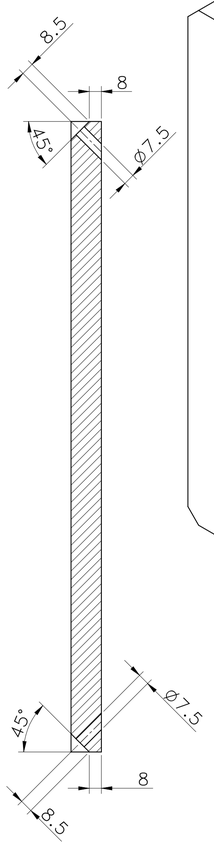


SECTION A–A
SCALE/ECHELLE 1:2

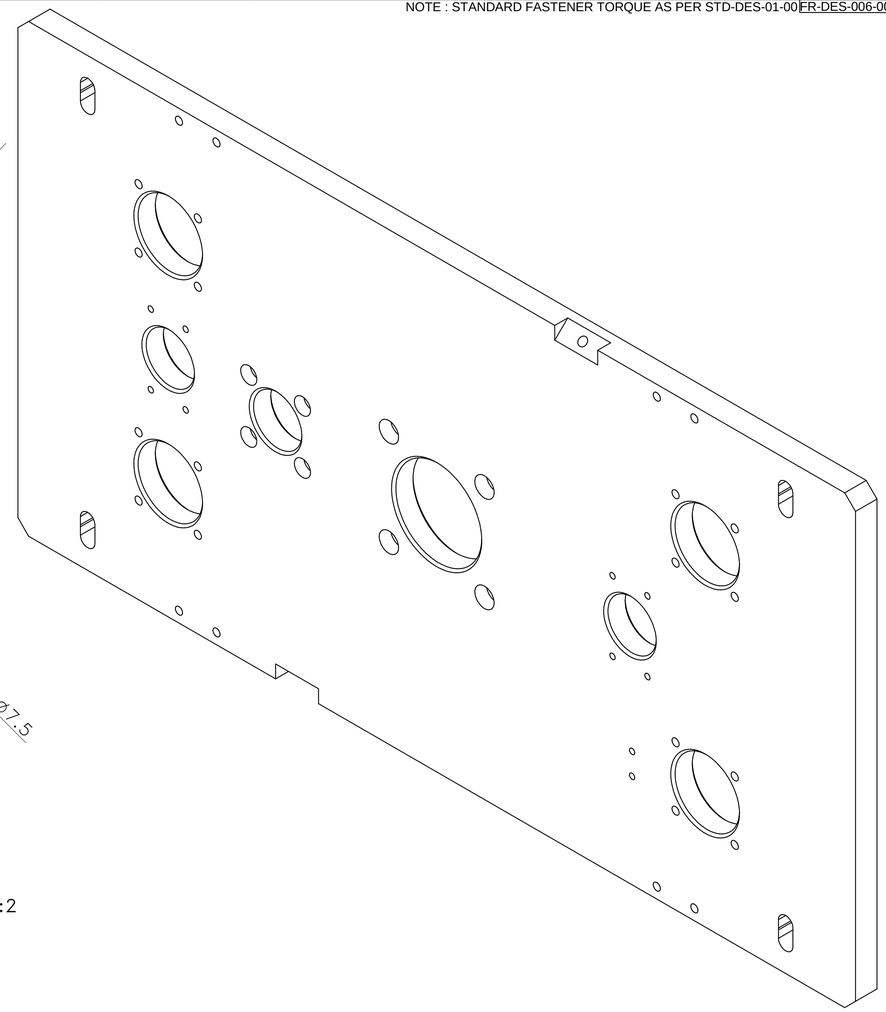

SCALE/ECHELLE 1:2

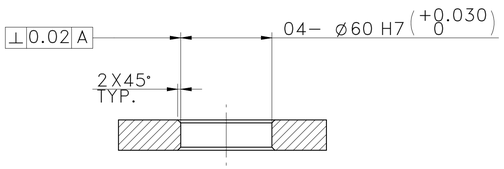

SECTION X–X
SCALE/ECHELLE 1:2



SECTION Y–Y
SCALE/ECHELLE 1:2

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 46.71 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 46.71 kg

RESERVED SPACE FOR STAMP
CONTROLLED COPY

REVISION	DESCRIPTION	DATE	DRN.BY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

WIPRO PARI GROUP

www.wiropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

DESCRIPTION: **BASE PLATE**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
1080.89 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT ---

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
2891	03004785	03002882	#
25/04/2024	25/04/2024	25/04/2024	NET WEIGHT-Kg 46.71 kg

DRG./PART CODE: **P23Y5B034001** | REV.: **00** | SCALE: 1 : 2 | SHEET: 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E:\DM Uploading\2022--23\P23Y5\P23Y5B034001.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00		H7 HOLE REF. SECT. X–X
A.2	500.00	0.00		H7 HOLE REF. SECT. X–X
A.3	0.00	200.00		H7 HOLE REF. SECT. X–X
A.4	500.00	200.00		H7 HOLE REF. SECT. X–X
B.1	10.00	–97.50	M8 THRU'	
B.2	45.00	–97.50	M8 THRU'	
B.3	455.00	–97.50	M8 THRU'	
B.4	490.00	–97.50	M8 THRU'	
B.5	–27.58	–27.58	M8 THRU'	
B.6	27.58	–27.58	M8 THRU'	
B.7	472.42	–27.58	M8 THRU'	
B.8	527.58	–27.58	M8 THRU'	
B.9	–27.58	27.58	M8 THRU'	
B.10	27.58	27.58	M8 THRU'	
B.11	472.42	27.58	M8 THRU'	
B.12	527.58	27.58	M8 THRU'	
B.13	–27.58	172.42	M8 THRU'	
B.14	27.58	172.42	M8 THRU'	
B.15	472.42	172.42	M8 THRU'	
B.16	527.58	172.42	M8 THRU'	
B.17	–27.58	227.58	M8 THRU'	
B.18	27.58	227.58	M8 THRU'	
B.19	472.42	227.58	M8 THRU'	
B.20	527.58	227.58	M8 THRU'	
B.21	10.00	297.50	M8 THRU'	
B.22	45.00	297.50	M8 THRU'	
B.23	455.00	297.50	M8 THRU'	
B.24	490.00	297.50	M8 THRU'	
C.1	432.00	–20.00	M6 THRU'	
C.2	432.00	0.00	M6 THRU'	
C.3	–16.25	67.50	M6 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
C.4	16.25	67.50	M6 THRU'	
C.5	413.75	67.50	M6 THRU'	
C.6	446.25	67.50	M6 THRU'	
C.7	–16.25	132.50	M6 THRU'	
C.8	16.25	132.50	M6 THRU'	
C.9	413.75	132.50	M6 THRU'	
C.10	446.25	132.50	M6 THRU'	
D.1	205.50	55.50	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	
D.2	294.50	55.50	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	
D.3	205.50	144.50	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	
D.4	294.50	144.50	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	
E.1	75.00	75.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	
E.2	125.00	75.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	
E.3	75.00	125.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	
E.4	125.00	125.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	
F.1	100.00	100.00	Ø 45.00 mm THRU'	H7 HOLE REF. SECT. Y–Y
F.2	430.00	100.00	Ø 45.00 mm THRU'	H7 HOLE REF. SECT. Y–Y
F.3	0.00	100.00	Ø 45.00 mm THRU'	H7 HOLE REF. SECT. Y–Y
G.1	250.00	100.00	Ø 80.00 mm THRU'	

TOLERANCE NOTE :–
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING:
WEIGHT(Kg): 46.71 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES :
POIDS (Kg): 46.71 kg

RESERVED SPACE FOR STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP RADII 0.5 R	UNSP CHF 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com
1.ALL DIMENSIONS ARE IN mm.
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: BASE PLATE
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
1080.89 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
2891	03004785	03002882	#	P23Y5B034001	00	1 : 2
25/04/2024	25/04/2024	25/04/2024	NET WEIGHT-Kg 46.71 kg			SHEET 2 OF 2

\\srv01043\Edm Uploading\2022-23\P23Y5\P23Y5B034001.dft