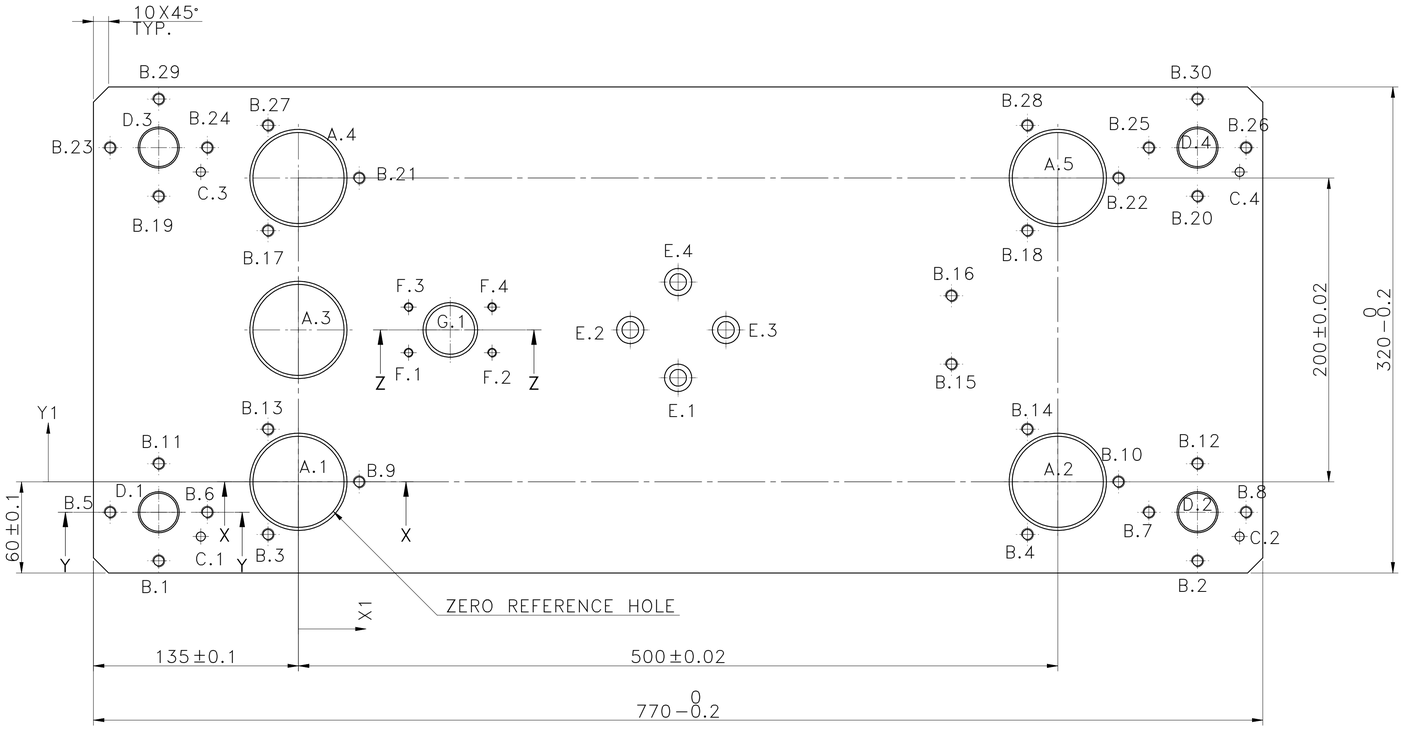
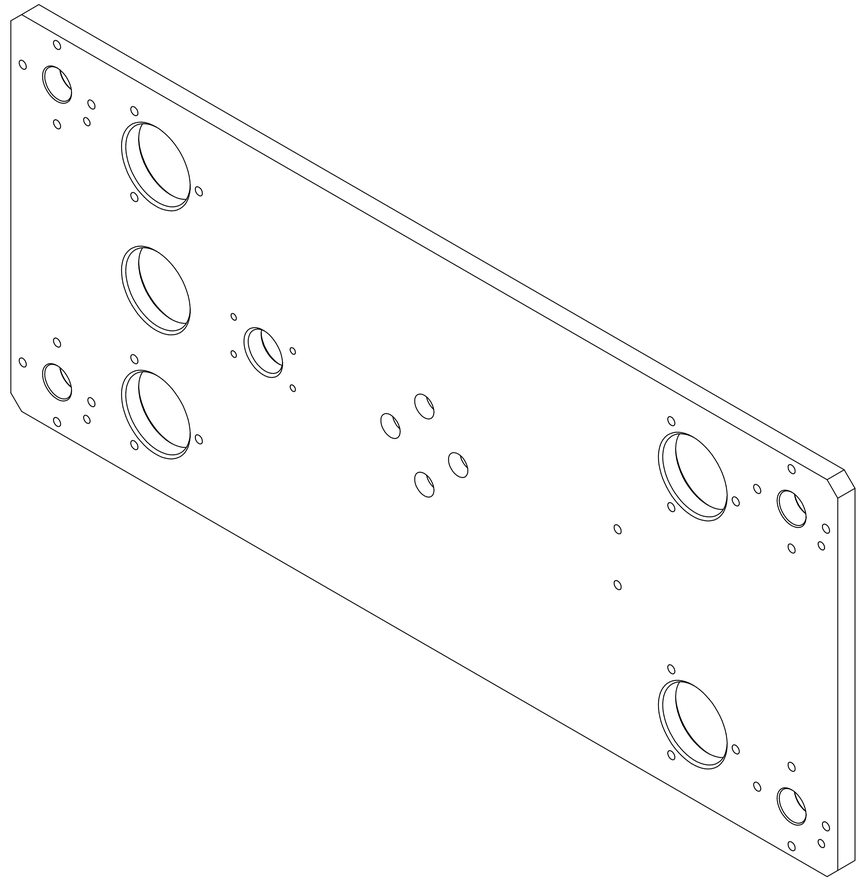
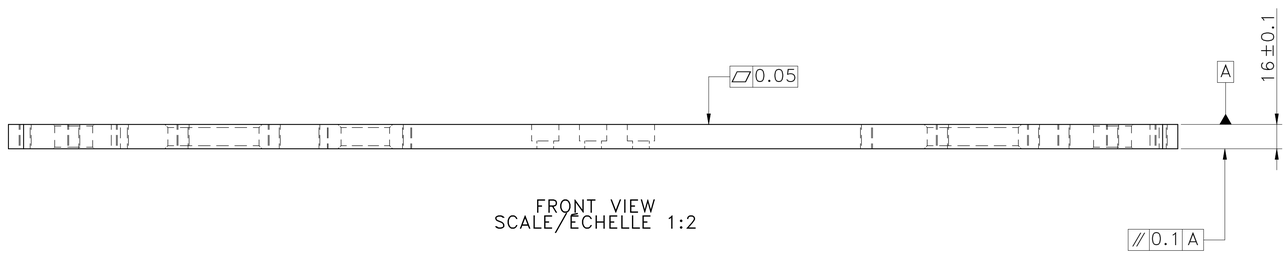
NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00





TOP VIEW
SCALE/ECHELLE 1:2



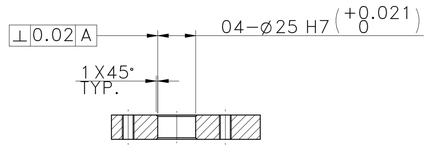
ISOMETRIC VIEW
SCALE/ECHELLE 1:2



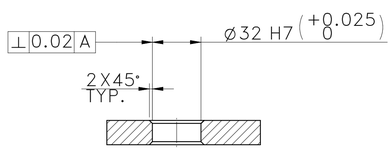

FRONT VIEW
SCALE/ECHELLE 1:2




SECTION X−X
SCALE/ECHELLE 1:2




SECTION Y−Y
SCALE/ECHELLE 1:2




SECTION Z−Z
SCALE/ECHELLE 1:2

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

NOTE : (English)
# MATERIAL: M.S.
# FINISH: I.Z.B.P. (TRIVALENT)
# MACHINING:
# WEIGHT(Kg ): 28.45 kg

NOTE :−(French)
# MATÉRIEL : M.S.
# FINITION : I.Z.B.P. (TRIVALENT)
# MACHINES :
# POIDS (Kg): 28.45 kg

RESERVED SPACE FOR
CONTROLLED COPY

| DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED | |
|---|---|
| UNSP.RADII 0.5 R | UNSP.CHF 0.5 X 45° |
| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm. | |
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |
| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |
| UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm. | |
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |
| UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| | | | |
| | | | |

WIPRO PARI GROUP

www.wipropari.com

DESCRIPTION: TOP PLATE

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT, ASK TEAM MEMBER

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 812.56 in^2 | # | # | WPES | 0300 | PL-02 | A1 |

| REFERENCE DWG. | --- | PART CLASS. B | HEAT TREATMENT | --- |
|---|---|---|---|---|

LOCATION : PUNE

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL | DRG./PART CODE | REV. | SCALE |
|---|---|---|---|---|---|---|
| 2891 | 03004785 | 03002882 | # | P23Y5B034002 | 00 | 1 : 2 |
| 25/04/2024 | 25/04/2024 | 25/04/2024 | NET WEIGHT-Kg 28.45 kg | | | SHEET 1 OF 2 |

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\Ex-DM Uploading\2022-23\P23Y5\P23Y5B034002.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

| HOLE TABLE | | | | |
|---|---|---|---|---|
| Hole | X | Y | Size | REMARK |
| A.1 | 0.00 | 0.00 | | H7 HOLE REF. SECT. X–X |
| A.2 | 500.00 | 0.00 | | H7 HOLE REF. SECT. X–X |
| A.3 | 0.00 | 100.00 | Ø 60.00 mm THRU' | |
| A.4 | 0.00 | 200.00 | | H7 HOLE REF. SECT. X–X |
| A.5 | 500.00 | 200.00 | | H7 HOLE REF. SECT. X–X |
| B.1 | –92.00 | –52.00 | M8 THRU' | |
| B.2 | 592.00 | –52.00 | M8 THRU' | |
| B.3 | –20.00 | –34.64 | M8 THRU' | |
| B.4 | 480.00 | –34.64 | M8 THRU' | |
| B.5 | –124.00 | –20.00 | M8 THRU' | |
| B.6 | –60.00 | –20.00 | M8 THRU' | |
| B.7 | 560.00 | –20.00 | M8 THRU' | |
| B.8 | 624.00 | –20.00 | M8 THRU' | |
| B.9 | 40.00 | 0.00 | M8 THRU' | |
| B.10 | 540.00 | 0.00 | M8 THRU' | |
| B.11 | –92.00 | 12.00 | M8 THRU' | |
| B.12 | 592.00 | 12.00 | M8 THRU' | |
| B.13 | –20.00 | 34.64 | M8 THRU' | |
| B.14 | 480.00 | 34.64 | M8 THRU' | |
| B.15 | 430.00 | 77.50 | M8 THRU' | |
| B.16 | 430.00 | 122.50 | M8 THRU' | |
| B.17 | –20.00 | 165.36 | M8 THRU' | |
| B.18 | 480.00 | 165.36 | M8 THRU' | |
| B.19 | –92.00 | 188.00 | M8 THRU' | |
| B.20 | 592.00 | 188.00 | M8 THRU' | |
| B.21 | 40.00 | 200.00 | M8 THRU' | |
| B.22 | 540.00 | 200.00 | M8 THRU' | |
| B.23 | –124.00 | 220.00 | M8 THRU' | |
| B.24 | –60.00 | 220.00 | M8 THRU' | |

| HOLE TABLE | | | | |
|---|---|---|---|---|
| Hole | X | Y | Size | REMARK |
| B.25 | 560.00 | 220.00 | M8 THRU' | |
| B.26 | 624.00 | 220.00 | M8 THRU' | |
| B.27 | –20.00 | 234.64 | M8 THRU' | |
| B.28 | 480.00 | 234.64 | M8 THRU' | |
| B.29 | –92.00 | 252.00 | M8 THRU' | |
| B.30 | 592.00 | 252.00 | M8 THRU' | |
| C.1 | –64.29 | –36.00 | Ø 6.00 mm THRU' | H7 HOLE |
| C.2 | 619.71 | –36.00 | Ø 6.00 mm THRU' | H7 HOLE |
| C.3 | –64.29 | 204.00 | Ø 6.00 mm THRU' | H7 HOLE |
| C.4 | 619.71 | 204.00 | Ø 6.00 mm THRU' | H7 HOLE |
| D.1 | –92.00 | –20.00 | Ø 25.00 mm THRU' | H7 HOLE REF. SECT. Y–Y |
| D.2 | 592.00 | –20.00 | Ø 25.00 mm THRU' | H7 HOLE REF. SECT. Y–Y |
| D.3 | –92.00 | 220.00 | Ø 25.00 mm THRU' | H7 HOLE REF. SECT. Y–Y |
| D.4 | 592.00 | 220.00 | Ø 25.00 mm THRU' | H7 HOLE REF. SECT. Y–Y |
| E.1 | 250.00 | 68.50 | Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP | |
| E.2 | 218.50 | 100.00 | Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP | |
| E.3 | 281.50 | 100.00 | Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP | |
| E.4 | 250.00 | 131.50 | Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP | |
| F.1 | 72.50 | 85.00 | M6 THRU' | |
| F.2 | 127.50 | 85.00 | M6 THRU' | |
| F.3 | 72.50 | 115.00 | M6 THRU' | |
| F.4 | 127.50 | 115.00 | M6 THRU' | |
| G.1 | 100.00 | 100.00 | Ø 32.00 mm THRU' | H7 HOLE REF. SECT. Z–Z |

TOLERANCE NOTE :–
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
# MATERIAL: M.S.
# FINISH: I.Z.B.P. (TRIVALENT)
# MACHINING:
# WEIGHT(Kg ): 28.45 kg

NOTE :–(French)
# MATÉRIEL : M.S.
# FINITION : I.Z.B.P. (TRIVALENT)
# MACHINES :
# POIDS (Kg): 28.45 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR COATING

CONTROLLED COPY

| DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED | |
|---|---|
| UNSP.RADII 0.5 R | UNSP.CHF 0.5 X 45° |
| UNSPECIFIED TOL.(KAB) FOR ANGULAR IN mm. | |
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |
| UNSPECIFIED TOL.(KAB) FOR LINEAR IN mm | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |
| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |
| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| | | | |
| | | | |

www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

WIPRO PARI GROUP

DESCRIPTION: **TOP PLATE**
DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 812.56 in^2 | # | # | WPES | 0300 | PL-02 | A1 |

REFERENCE DWG. ---
PART CLASS. B
HEAT TREATMENT ---
LOCATION : PUNE

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL |
|---|---|---|---|
| 2891 | 03004785 | 03002882 | # |
| 25/04/2024 | 25/04/2024 | 25/04/2024 | NET WEIGHT-Kg 28.45 kg |

DRG./PART CODE: **P23Y5B034002**
REV.: **00**
SCALE: 1 : 2
SHEET: 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\Ex-DM Uploading\2022 - 23\P23Y5\P23Y5B034002.dft