

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

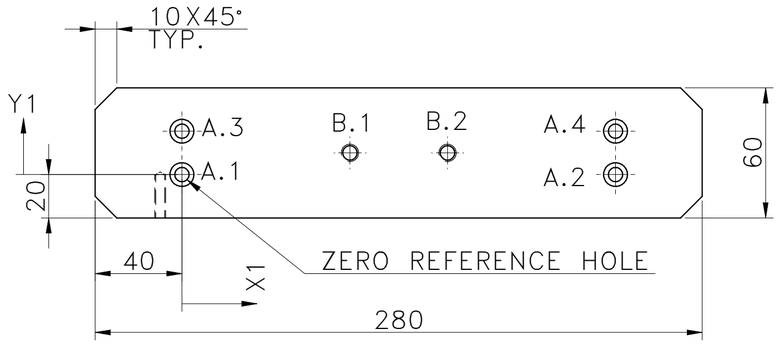



TOP VIEW
SCALE/ÉCHELLE 1:2

| HOLE TABLE | | | | |
|---|---|---|---|---|
| Hole | X | Y | Size | REMARK |
| A.1 | 0.00 | 0.00 | Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP | |
| A.2 | 200.00 | 0.00 | Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP | |
| A.3 | 0.00 | 20.00 | Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP | |
| A.4 | 200.00 | 20.00 | Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP | |
| B.1 | 77.50 | 10.00 | M8 THRU' | |
| B.2 | 122.50 | 10.00 | M8 THRU' | |

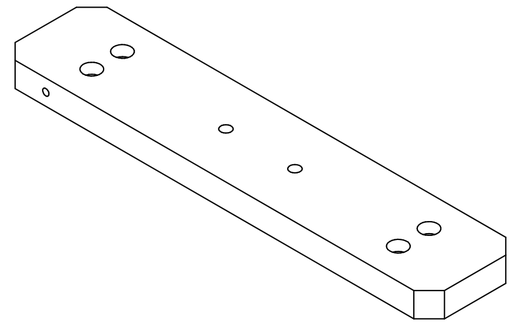

ISOMETRC VIEW
SCALE/ÉCHELLE 1:2

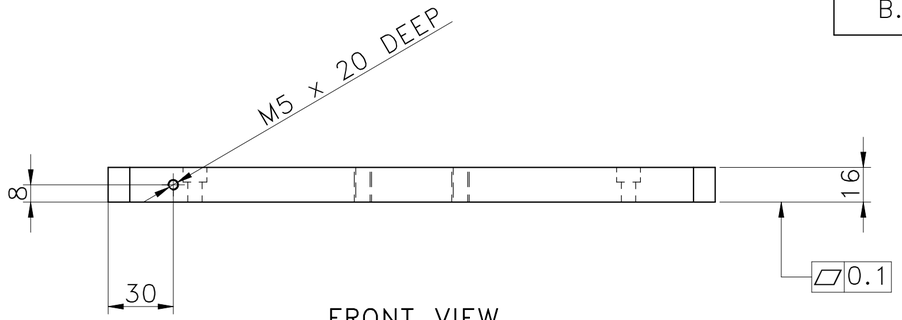


FRONT VIEW
SCALE/ÉCHELLE 1:2

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

TOLERANCE NOTE :–
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
# MATERIAL: M.S.
# FINISH: I.Z.B.P. (TRIVALENT)
# MACHINING: 3.2
# WEIGHT(Kg ): 2.04 kg

NOTE :–(French)
# MATÉRIEL : M.S.
# FINITION : I.Z.B.P. (TRIVALENT)
# MACHINES : 3.2
# POIDS (Kg): 2.04 kg

RESERVED SPACE FOR STAMP

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

| UNSP.RADII | UNSP.CHF. |
|---|---|
| 0.5 R | 0.5 X 45° |

| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |

| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |

| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |

| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| . | . | . | . |
| . | . | . | . |

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **END PLATE**

DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 71.19 in^2 | # | # | WPES | 0300 | PL-02 | A2 |

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT ---

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL | DRG./PART CODE | REV. | SCALE |
|---|---|---|---|---|---|---|
| 2891 | 03004785 | 03002882 | # | P23Y5B034011 | 00 | 1 : |
| 25/04/2024 | 25/04/2024 | 25/04/2024 | NET WEIGHT-Kg 2.04 kg | | | SHEET 1 OF 1 |

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B034011.dft