


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

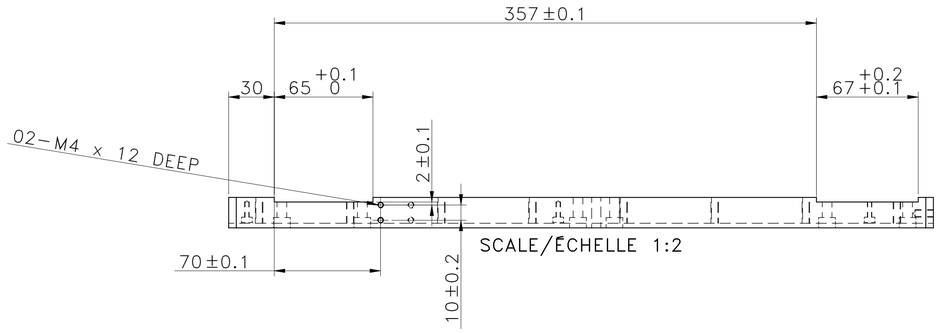


SCALE/ÉCHELLE 1:2

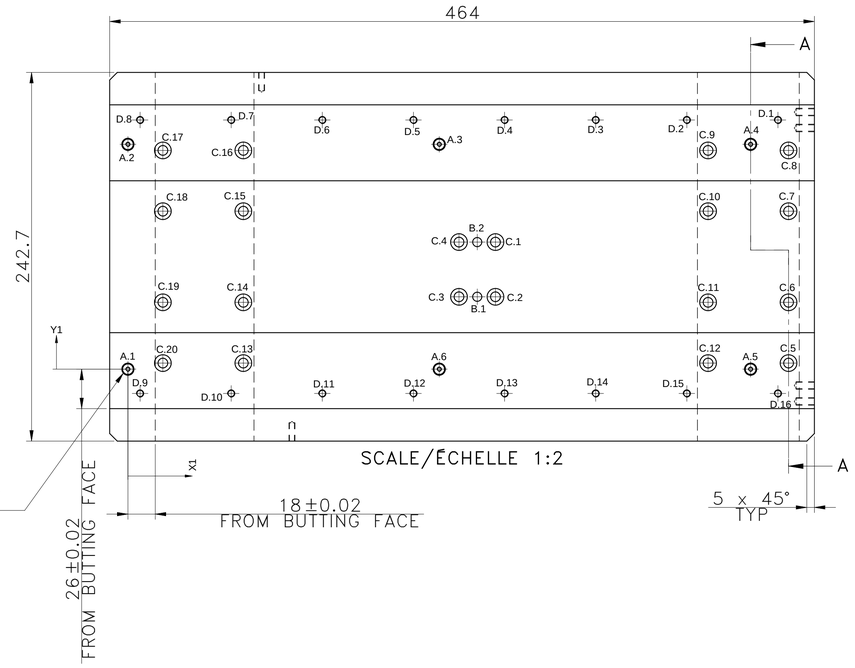


SCALE/ÉCHELLE 1:2

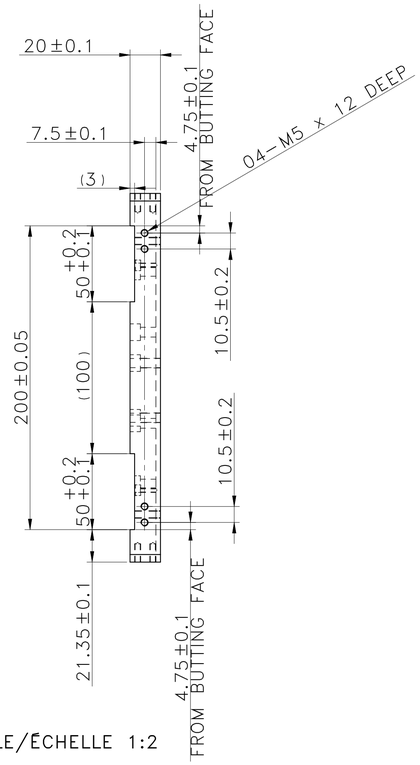


SCALE/ÉCHELLE 1:2

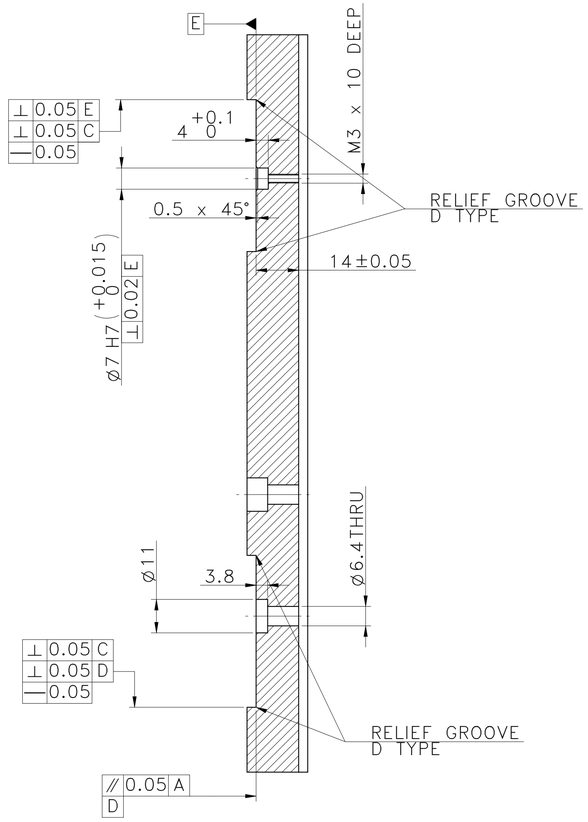


SECTION A–A
SCALE/ÉCHELLE 1:1

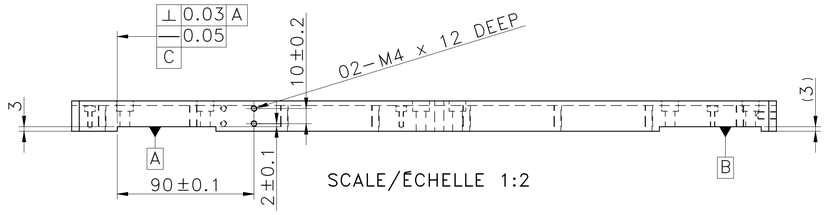

SCALE/ÉCHELLE 1:2



SCALE/ÉCHELLE 1:5



SCALE/ÉCHELLE 1:5

NOTE :–
CO PLANERITY OF SURFACE A & B SHOULD BE WITHIN 0.05
CO PLANERITY OF SURFACE D & E SHOULD BE WITHIN 0.05

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 15.60 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 15.60 kg

RESERVED SPACE FOR CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(PAR) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(PAR) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT ASK TEAM MEMBER

DESCRIPTION: DOLLY MTG PLATE
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
422.95 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. NA | PART CLASS. B | HEAT TREATMENT NA

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
9265	03004785	03002882	#
08/05/2024	08/05/2024	08/05/2024	NET WEIGHT-Kg 15.60 kg

DRG./PART CODE: P23Y5B071010 | REV.: 00 | SCALE: 1 : 2 | SHEET: 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01102\Vault Uploading\2022--23\P23Y5\P23Y5B071010.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 7.00 mm x 4.00 mm DEEP	H7 REF.SEC A–A
A.2	0.00	148.00	Ø 7.00 mm x 4.00 mm DEEP	H7 REF.SEC A–A
A.3	205.00	148.00	Ø 7.00 mm x 4.00 mm DEEP	H7 REF.SEC A–A
A.4	410.00	148.00	Ø 7.00 mm x 4.00 mm DEEP	H7 REF.SEC A–A
A.5	410.00	0.00	Ø 7.00 mm x 4.00 mm DEEP	H7 REF.SEC A–A
A.6	205.00	0.00	Ø 7.00 mm x 4.00 mm DEEP	H7 REF.SEC A–A
B.1	230.00	47.65	Ø 6.00 mm x 20.00 mm DEEP	H7
B.2	230.00	83.65	Ø 6.00 mm x 20.00 mm DEEP	H7
C.1	242.00	83.65	Ø 6.40 mm x 35.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.2	242.00	47.65	Ø 6.40 mm x 35.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.3	218.00	47.65	Ø 6.40 mm x 35.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.4	218.00	83.65	Ø 6.40 mm x 35.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.5	435.00	4.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.6	435.00	44.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.7	435.00	104.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.8	435.00	144.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.9	382.00	144.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.10	382.00	104.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.11	382.00	44.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.12	382.00	4.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.13	76.00	4.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.14	76.00	44.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.15	76.00	104.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.16	76.00	144.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A

HOLE TABLE				
Hole	X	Y	Size	REMARK
C.17	23.00	144.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.18	23.00	104.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.19	23.00	44.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
C.20	23.00	4.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
D.1	428.00	164.00	M5 THRU'	
D.2	368.00	164.00	M5 THRU'	
D.3	308.00	164.00	M5 THRU'	
D.4	248.00	164.00	M5 THRU'	
D.5	188.00	164.00	M5 THRU'	
D.6	128.00	164.00	M5 THRU'	
D.7	68.00	164.00	M5 THRU'	
D.8	8.00	164.00	M5 THRU'	
D.9	8.00	–16.00	M5 THRU'	
D.10	68.00	–16.00	M5 THRU'	
D.11	128.00	–16.00	M5 THRU'	
D.12	188.00	–16.00	M5 THRU'	
D.13	248.00	–16.00	M5 THRU'	
D.14	308.00	–16.00	M5 THRU'	
D.15	368.00	–16.00	M5 THRU'	
D.16	428.00	–16.00	M5 THRU'	

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN=0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 15.60 kg

NOTE :-(French)
MATERIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 15.60 kg

RESERVED SPACE FOR CONTROLLED COPY STAMP

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MC) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MC) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wipropari.com

DESCRIPTION: DOLLY MTG PLATE
DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
422.95 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. NA | PART CLASS. B | HEAT TREATMENT NA

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL #	DRG./PART CODE	REV.	SCALE
9265	03004785	03002882	NET WEIGHT-Kg 15.60 kg	P23Y5B071010	00	1 : 2
08/05/2024	08/05/2024	08/05/2024				SHEET 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01102\E:\DM Uploading\2022-23\P23Y5\P23Y5B071010.dft