

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

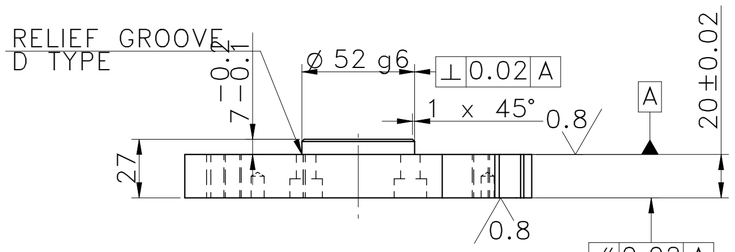


SCALE/ÉCHELLE 1:2

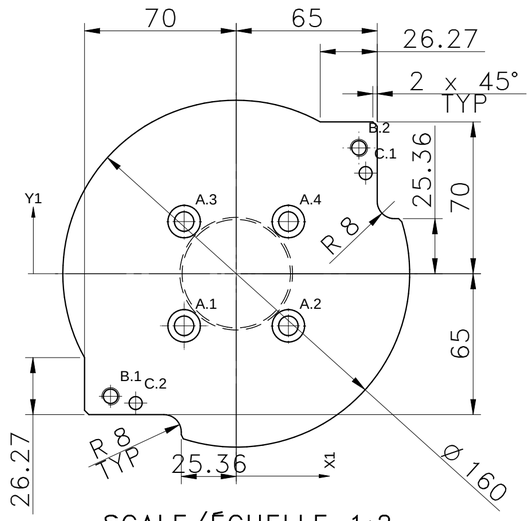



SCALE/ÉCHELLE 1:2

| HOLE TABLE | | | | |
|---|---|---|---|---|
| Hole | X | Y | Size | REMARK |
| A.1 | −24.04 | −24.04 | Ø 9.00 mm THRU'<br>C'BORE Ø 15.00 mm − 8.80 mm DEEP | |
| A.2 | 24.04 | −24.04 | Ø 9.00 mm THRU'<br>C'BORE Ø 15.00 mm − 8.80 mm DEEP | |
| A.3 | −24.04 | 24.04 | Ø 9.00 mm THRU'<br>C'BORE Ø 15.00 mm − 8.80 mm DEEP | |
| A.4 | 24.04 | 24.04 | Ø 9.00 mm THRU'<br>C'BORE Ø 15.00 mm − 8.80 mm DEEP | |
| B.1 | −57.99 | −56.56 | M8 THRU' | |
| B.2 | 56.56 | 57.99 | M8 THRU' | |
| C.1 | 59.67 | 46.40 | Ø 6.00 mm x 10.00 mm DEEP | H7 |
| C.2 | −46.40 | −59.67 | Ø 6.00 mm x 10.00 mm DEEP | H7 |

TOLERANCE NOTE:−

ALL H7 HOLES C.D. SHOULD BE CONTROLLED WITHIN ±0.02 / IT7
ALL HOLES,TAP & COUNTER BORE C.D.
SHOULD BE CONTROLLED WITHIN ± 0.2

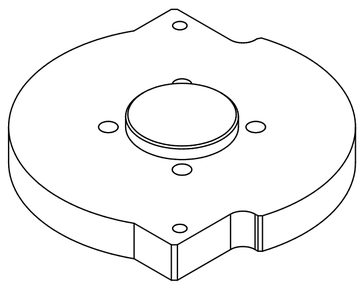

SCALE/ÉCHELLE 1:2

HEAT TREATMENT NOTE :−
1) TO BE CASE HARDENED UPTO 56~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.( IF APPLICABLE )

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

CNC MACHINING NOTE :− (English)
1) TO BE MACHINED BY 3D CAD DATA.

NOTE POUR MACHINES CNC :− (French)
1) À USINER À PARTIR DES DONNÉES CAD 3D.

NOTE : (English)
# MATERIAL: Steel − Alloyed:1.7147 , 20MnCr5
# FINISH: I.Z.B.P. (TRIVALENT)
# MACHINING: 3.2 ( 0.8 )
# WEIGHT(Kg ): 3.21 kg

NOTE :−(French)
# MATÉRIEL : Steel − Alloyed:1.7147 , 20MnCr5
# FINITION : I.Z.B.P. (TRIVALENT)
# MACHINES : 3.2 ( 0.8 )
# POIDS (Kg): 3.21 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

| UNSP.RADII | UNSP.CHF. |
|---|---|
| 0.5 R | 0.5 X 45° |

| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm | |
|---|---|
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |

| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |

| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |

| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |

LIMITS
Gen Tol.: IS 2102

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| . | . | . | . |
| . | . | . | . |

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **LOAD CELL PLATE**
DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 86.91 in^2 | # | # | WPES | 0300 | PL-02 | A2 |

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL |
|---|---|---|---|
| 03006128 | 03004785 | 03002882 | # |
| 09/05/2024 | 09/05/2024 | 09/05/2024 | NET WEIGHT-Kg: 3.21 kg |

DRG./PART CODE: **P23Y5B071048**
REV.: **00**
SCALE: 1 : 2
SHEET: 1 OF 1

\\srv01102\Ex\DM Uploading\2022-23\P23Y5\P23Y5B071048.dft