


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

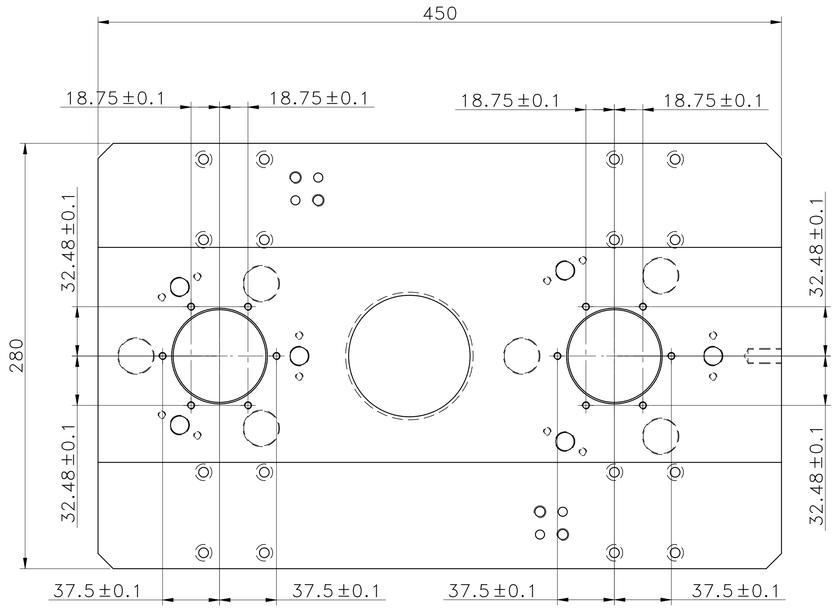


SCALE/ÉCHELLE 1:2

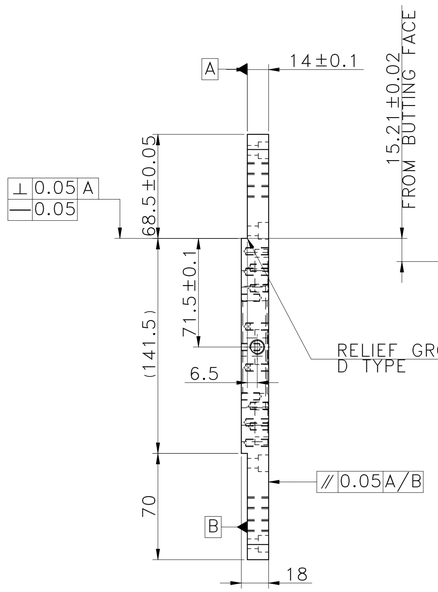


SCALE/ÉCHELLE 1:2

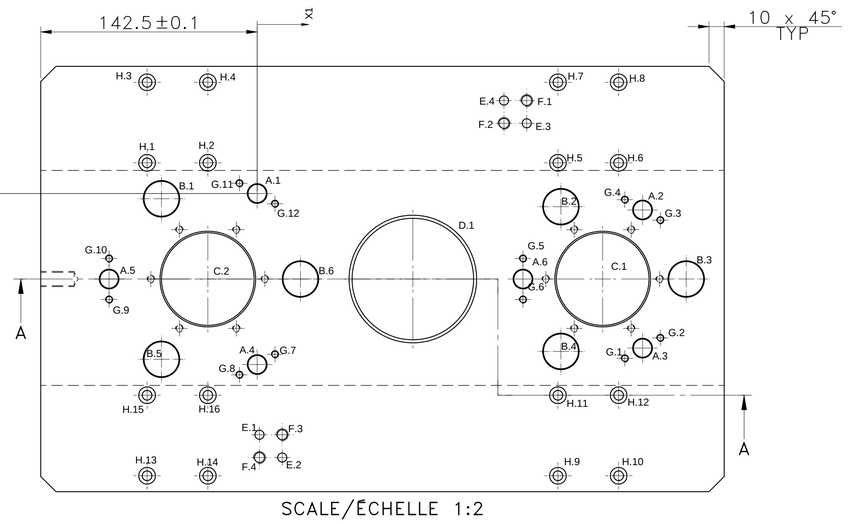

SCALE/ÉCHELLE 1:2

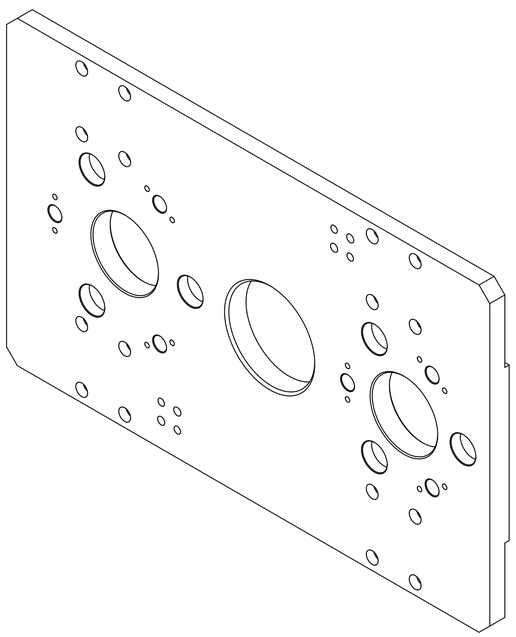

SCALE/ÉCHELLE 1:2

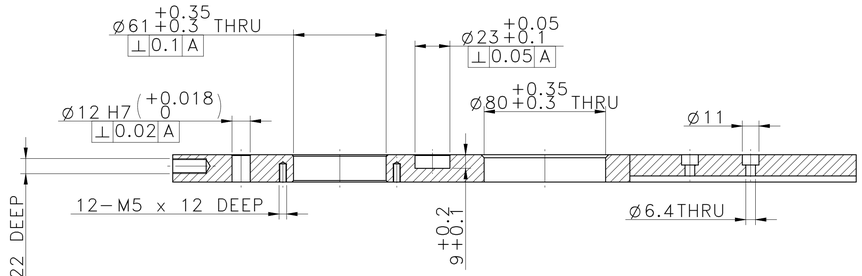

SECTION A–A
SCALE/ÉCHELLE 1:2

NOTE :–
CO PLANERITY & FLATNESS OF SURFACE A & B SHOULD BE WITHIN 0.1

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 13.80 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 13.80 kg

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP RADII 0.5 R	UNSP CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: FIXTURE MTG

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
439.00 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	NA	PART CLASS. B	HEAT TREATMENT	NA

LOCATION : PUNE	DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
	9265	03004785	03002882	#	P23Y5B071057	00	1 : 2
	08/05/2024	08/05/2024	08/05/2024	NET WEIGHT-Kg 13.80 kg			SHEET 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01102\Edm Uploading\2022-23\P23Y5\P23Y5B071057.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 12.00 mm x 20.00 mm DEEP	H7 REF.SEC A–A
A.2	253.75	–10.83	Ø 12.00 mm x 20.00 mm DEEP	H7 REF.SEC A–A
A.3	253.75	–101.76	Ø 12.00 mm x 20.00 mm DEEP	H7 REF.SEC A–A
A.4	0.00	–112.58	Ø 12.00 mm x 20.00 mm DEEP	H7 REF.SEC A–A
A.5	–97.50	–56.29	Ø 12.00 mm x 20.00 mm DEEP	H7 REF.SEC A–A
A.6	175.00	–56.29	Ø 12.00 mm x 20.00 mm DEEP	H7 REF.SEC A–A
B.1	–63.00	–3.46	Ø 23.00 mm x 9.00 mm DEEP	REF.SEC A–A
B.2	200.00	–8.66	Ø 23.00 mm x 9.00 mm DEEP	REF.SEC A–A
B.3	282.50	–56.29	Ø 23.00 mm x 9.00 mm DEEP	REF.SEC A–A
B.4	200.00	–103.92	Ø 23.00 mm x 9.00 mm DEEP	REF.SEC A–A
B.5	–63.00	–109.12	Ø 23.00 mm x 9.00 mm DEEP	REF.SEC A–A
B.6	28.50	–56.29	Ø 23.00 mm x 9.00 mm DEEP	REF.SEC A–A
C.1	227.50	–56.29		REF.SEC A–A
C.2	–32.50	–56.29		REF.SEC A–A
D.1	102.50	–56.29		REF.SEC A–A
E.1	1.50	–158.79	Ø 6.00 mm x 22.00 mm DEEP	H7
E.2	16.50	–173.79	Ø 6.00 mm x 22.00 mm DEEP	H7
E.3	177.50	46.21	Ø 6.00 mm x 22.00 mm DEEP	H7
E.4	162.50	61.21	Ø 6.00 mm x 22.00 mm DEEP	H7
F.1	177.50	61.21	M8 x 22.00 mm DEEP	
F.2	162.50	46.21	M8 x 22.00 mm DEEP	
F.3	16.50	–158.79	M8 x 22.00 mm DEEP	
F.4	1.50	–173.79	M8 x 22.00 mm DEEP	
G.1	242.06	–108.51	M5 x 12.00 mm DEEP	
G.2	265.44	–95.01	M5 x 12.00 mm DEEP	
G.3	265.44	–17.58	M5 x 12.00 mm DEEP	
G.4	242.06	–4.08	M5 x 12.00 mm DEEP	
G.5	175.00	–42.79	M5 x 12.00 mm DEEP	
G.6	175.00	–69.79	M5 x 12.00 mm DEEP	
G.7	11.69	–105.83	M5 x 15.00 mm DEEP	
G.8	–11.69	–119.33	M5 x 15.00 mm DEEP	
G.9	–97.50	–69.79	M5 x 15.00 mm DEEP	
G.10	–97.50	–42.79	M5 x 15.00 mm DEEP	
G.11	–11.69	6.75	M5 x 15.00 mm DEEP	
G.12	11.69	–6.75	M5 x 15.00 mm DEEP	
H.1	–72.50	20.21	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.2	–32.50	20.21	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.3	–72.50	73.21	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.4	–32.50	73.21	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.5	198.00	20.21	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.6	238.00	20.21	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A

HOLE TABLE				
Hole	X	Y	Size	REMARK
H.7	198.00	73.21	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.8	238.00	73.21	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.9	198.00	–185.79	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.10	238.00	–185.79	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.11	198.00	–132.79	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.12	238.00	–132.79	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.13	–72.50	–185.79	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.14	–32.50	–185.79	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.15	–72.50	–132.79	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A
H.16	–32.50	–132.79	Ø 6.40 mm x 20.00 mm DEEP C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC A–A

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D.
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING:
WEIGHT(Kg): 13.80 kg

NOTE :-(French)
MATERIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES :
POIDS (Kg): 13.80 kg

RESERVED SPACE FOR CONTROLLED COPY STAMP

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wipropari.com

DESCRIPTION: FIXTURE MTG

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
439.00 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. NA | PART CLASS. B | HEAT TREATMENT NA

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
9265	03004785	03002882	#	P23Y5B071057	00	1 : 2
08/05/2024	08/05/2024	08/05/2024	NET WEIGHT-Kg 13.80 kg			SHEET 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01102\Ex-DM Uploading\2022--23\P23Y5\P23Y5B071057.dft