


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

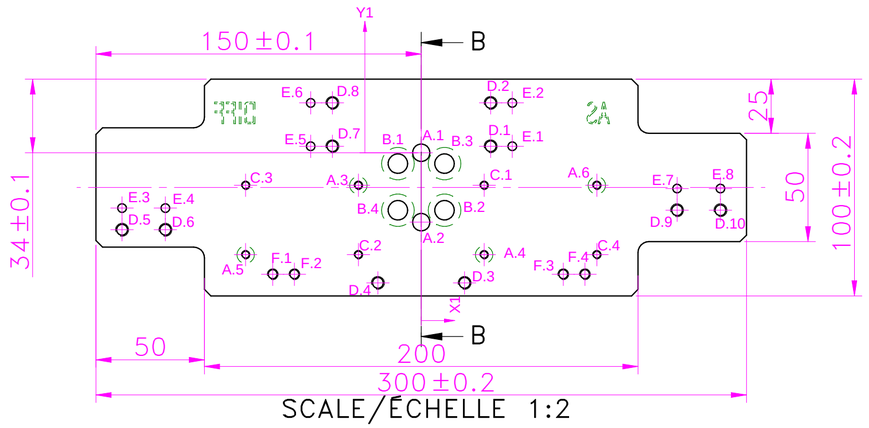


SCALE/ÉCHELLE 1:2




SCALE/ÉCHELLE 1:2

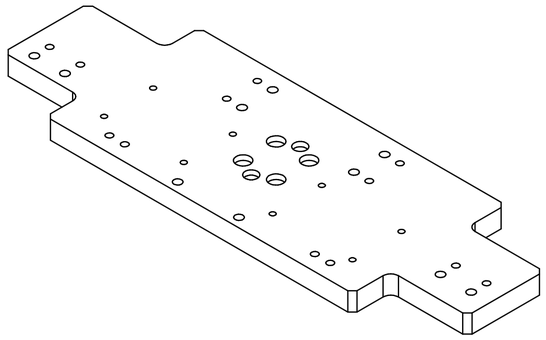


SCALE/ÉCHELLE 1:2

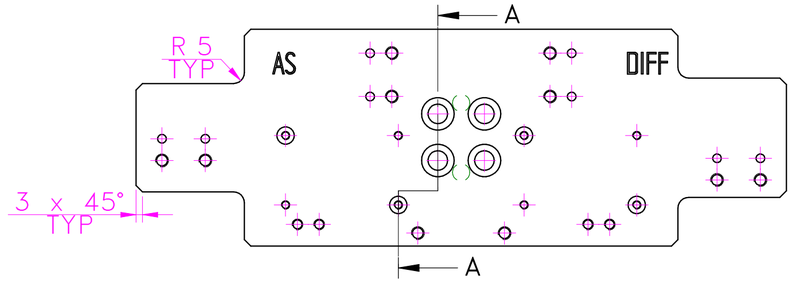

VIEW C
SCALE/ÉCHELLE 1:2

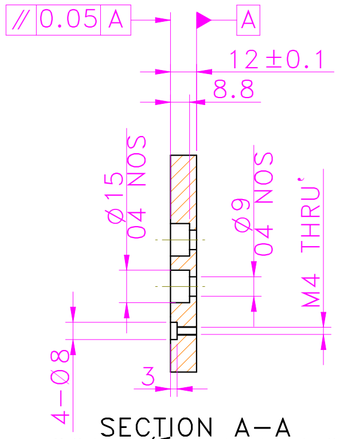

SECTION A–A
SCALE/ÉCHELLE 1:2

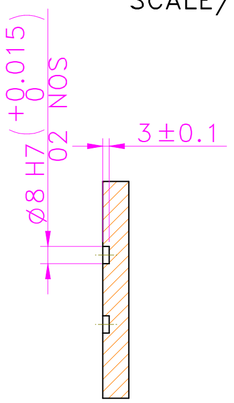

SECTION B–B
SCALE/ÉCHELLE 1:2

TOLERANCE NOTE:–

ALL H7 HOLES C.D. SHOULD BE CONTROLLED WITHIN ±0.02 / IT7
ALL HOLES,TAP & COUNTER BORE C.D.
SHOULD BE CONTROLLED WITHIN ± 0.2

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE:
1) ENGRAVE ABOVE MENTION LETTERS IN BLACK TEXT.
2) ENGRAVE DEPTH – 0.2 TO 0.5mm.
3) ENGRAVE TEXT HEIGHT AS PER DRAWING
4) ENGRAVE WIDTH AS PER DRAWING
5) FONT STYLE – ARIAL
6) PLATE THICKNESS – 2 mm

NOTE : (English)
MATERIAL: AL HE30
FINISH: SELF ANODIZE
MACHINING: 3.2
WEIGHT(Kg): 0.79 kg

NOTE :–(French)
MATÉRIEL : AL HE30
FINITION : SELF ANODIZE
MACHINES : 3.2
POIDS (Kg): 0.79 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

RESERVED SPACE FOR COMPANY STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: ROTOARY GRIPER MTG
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
101.61 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03007292	03004785	03002882	#	P23Y5B072022	00	1 : 2
10/05/2024	10/05/2024	10/05/2024	NET WEIGHT-Kg 0.79 kg			SHEET 1 OF 2

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B072022.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE

Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 8.00 mm x 3.00 mm DEEP	REF SECTION B–B
A.2	0.00	−32.00	Ø 8.00 mm x 3.00 mm DEEP	REF SECTION B–B
A.3	−29.00	−15.00	Ø 8.00 mm x 3.00 mm DEEP	REF SECTION A–A
A.4	29.00	−47.00	Ø 8.00 mm x 3.00 mm DEEP	REF SECTION A–A
A.5	−81.00	−47.00	Ø 8.00 mm x 3.00 mm DEEP	REF SECTION A–A
A.6	81.00	−15.00	Ø 8.00 mm x 3.00 mm DEEP	REF SECTION A–A
B.1	−10.75	−5.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SECTION A–A
B.2	10.75	−26.50	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SECTION A–A
B.3	10.75	−5.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SECTION A–A
B.4	−10.75	−26.50	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SECTION A–A
C.1	29.00	−15.00	M4 THRU'	
C.2	−29.00	−47.00	M4 THRU'	
C.3	−81.00	−15.00	M4 THRU'	
C.4	81.00	−47.00	M4 THRU'	
D.1	32.00	3.00	M6 THRU'	
D.2	32.00	23.00	M6 THRU'	
D.3	20.00	−60.00	M6 THRU'	

HOLE TABLE

Hole	X	Y	Size	REMARK
D.4	−20.00	−60.00	M6 THRU'	
D.5	−138.00	−35.50	M6 THRU'	
D.6	−118.00	−35.50	M6 THRU'	
D.7	−41.00	3.00	M6 THRU'	
D.8	−41.00	23.00	M6 THRU'	
D.9	118.00	−26.50	M6 THRU'	
D.10	138.00	−26.50	M6 THRU'	
E.1	42.00	3.00	Ø 4.00 mm THRU'	
E.2	42.00	23.00	Ø 4.00 mm THRU'	
E.3	−138.00	−25.50	Ø 4.00 mm THRU'	
E.4	−118.00	−25.50	Ø 4.00 mm THRU'	
E.5	−51.00	3.00	Ø 4.00 mm THRU'	
E.6	−51.00	23.00	Ø 4.00 mm THRU'	
E.7	118.00	−16.50	Ø 4.00 mm THRU'	
E.8	138.00	−16.50	Ø 4.00 mm THRU'	
F.1	−68.50	−56.00	M5 THRU'	
F.2	−58.50	−56.00	M5 THRU'	
F.3	65.50	−56.00	M5 THRU'	
F.4	75.50	−56.00	M5 THRU'	

NOTE : (English)
MATERIAL: AL HE30
FINISH: SELF ANODIZE
MACHINING: 3.2
WEIGHT(Kg): 0.79 kg

NOTE :–(French)
MATÉRIEL : AL HE30
FINITION : SELF ANODIZE
MACHINES : 3.2
POIDS (Kg): 0.79 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

RESERVED SPACE FOR CONTROL COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: ROTOARY GRIPER MTG

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
101.61 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03007292	03004785	03002882	#	P23Y5B072022	00	1 : 2
10/05/2024	10/05/2024	10/05/2024	NET WEIGHT-Kg 0.79 kg			SHEET 2 OF 2

\\sr\01043\ExDM Uploading\2022-23\P23Y5\P23Y5B072022.dft