


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

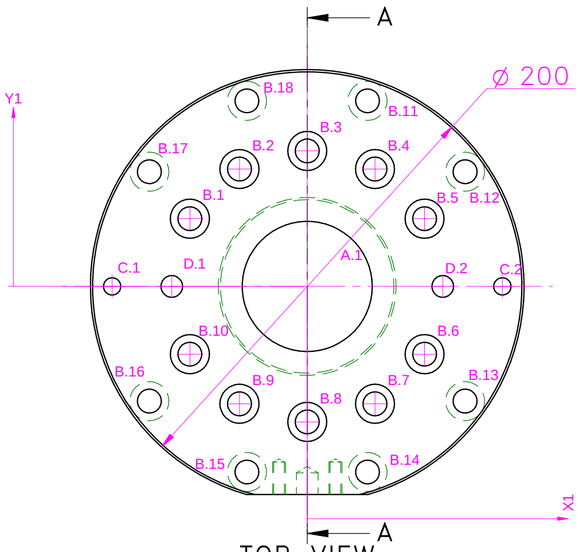


TOP VIEW
SCALE/ÉCHELLE 1:2

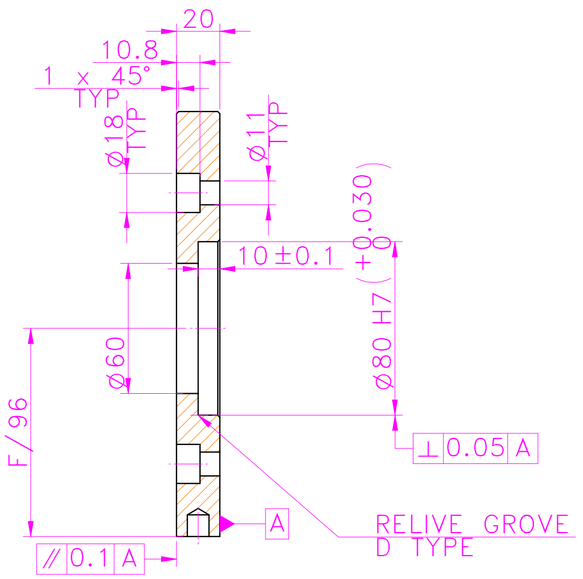

SECTION A–A
SCALE/ÉCHELLE 1:2

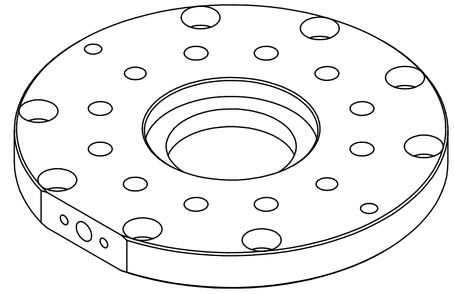

SCALE/ÉCHELLE 1:2

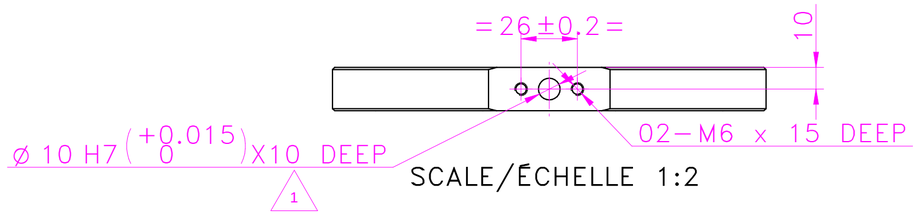

SCALE/ÉCHELLE 1:2

HEAT TREATMENT NOTE:–

1) TO BE HARDENED UPTO 32–35 HRC.
2) THREADS TO BE KEEP SOFT.
3) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

TOLERANCE NOTE:–

ALL H7 HOLES C.D. SHOULD BE CONTROLLED WITHIN ±0.02 / IT7
ALL HOLES,TAP & COUNTER BORE C.D.
SHOULD BE CONTROLLED WITHIN ± 0.2

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: EN24
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 3.71 kg

NOTE :–(French)
MATÉRIEL : EN24
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 3.71 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
1	DIMENSION CHANGED	27/05/2024	7292

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm.
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION						DRAWING TYPE
ROBOT MTG DISC						MACHINING
SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
137.71 in^2	#	#	WPES	0300	PL-02	A2
REFERENCE DWG.		PART CLASS. B	HEAT TREATMENT			

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03007292	03004785	03002882	#	P23Y5B072033	01	1 : 2
27/05/2024	27/05/2024	27/05/2024	NET WEIGHT-Kg 3.71 kg			SHEET 1 OF 2

\\srv01043\ExDM Uploading\2022-23\P2315\P23Y5B072033.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE(TOP VIEW)

Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 60.00 mm THRU'	H7 REF. SECTION A–A
B.1	–54.13	31.25	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A
B.2	–31.25	54.13	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A
B.3	0.00	62.50	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A
B.4	31.25	54.13	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A
B.5	54.13	31.25	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A
B.6	54.13	–31.25	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A
B.7	31.25	–54.13	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A
B.8	0.00	–62.50	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A
B.9	–31.25	–54.13	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A
B.10	–54.13	–31.25	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A
B.11	27.81	85.60	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A BOTTOM VIEW
B.12	72.81	52.90	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A BOTTOM VIEW
B.13	72.81	–52.90	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A BOTTOM VIEW

HOLE TABLE(TOP VIEW)

Hole	X	Y	Size	REMARK
B.14	27.81	–85.60	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A BOTTOM VIEW
B.15	–27.81	–85.60	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A BOTTOM VIEW
B.16	–72.81	–52.90	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A BOTTOM VIEW
B.17	–72.81	52.90	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A BOTTOM VIEW
B.18	–27.81	85.60	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF. SECTION A–A BOTTOM VIEW
C.1	–90.00	0.00	Ø 8.00 mm THRU'	H7
C.2	90.00	0.00	Ø 8.00 mm THRU'	H7
D.1	–62.50	0.00	Ø 10.00 mm THRU'	H7
D.2	62.50	0.00	Ø 10.00 mm THRU'	H7

NOTE : (English)
MATERIAL: EN24
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 3.71 kg

NOTE :–(French)
MATERIEL : EN24
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 3.71 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

RESERVED SPACE FOR CONTROLLED COPY

REVISION	DESCRIPTION	DATE	DRN.BY
		.	.
	DIMENSION CHANGED	27/05/2024	7292

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(F/AB) FOR ANGULAR IN mm.

UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(F/AB) FOR LINEAR IN mm.

0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.

UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.

0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION: ROBOT MTG DISC
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
137.71 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03007292	03004785	03002882	#	P23Y5B072033	01	1 : 2
27/05/2024	27/05/2024	27/05/2024	NET WEIGHT-Kg 3.71 kg			SHEET 2 OF 2

\\sr-v01043\ExDM Uploading\2022-23\P23Y5\P23Y5B072033.dft