


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

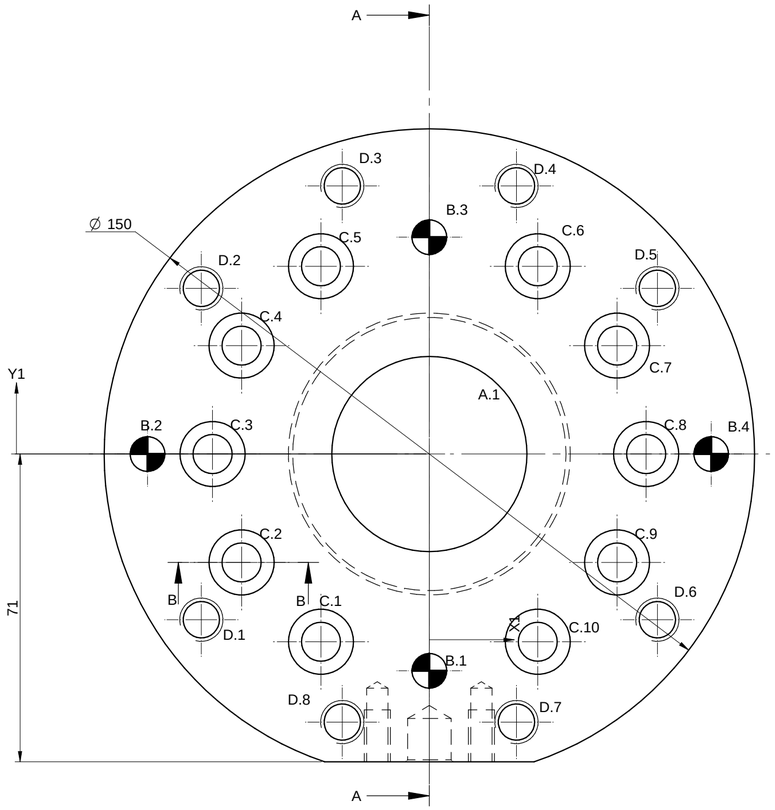

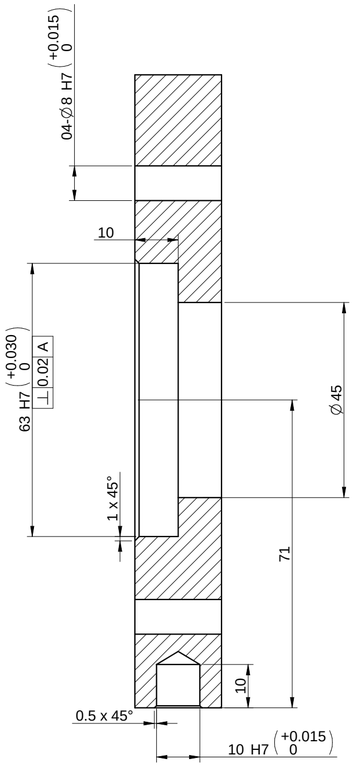


SECTION A-A
SCALE 1:1

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00		
B.1	0.00	-50.00	Ø 8.00 mm THRU'	H7 REFER SEC A-A
B.2	-65.00	0.00	Ø 8.00 mm THRU'	H7 REFER SEC A-A
B.3	0.00	50.00	Ø 8.00 mm THRU'	H7 REFER SEC A-A
B.4	65.00	0.00	Ø 8.00 mm THRU'	H7 REFER SEC A-A
C.1	-25.00	-43.30	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	
C.2	-43.30	-25.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	
C.3	-50.00	0.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	
C.4	-43.30	25.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	
C.5	-25.00	43.30	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	
C.6	25.00	43.30	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	
C.7	43.30	25.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	
C.8	50.00	0.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	
C.9	43.30	-25.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	
C.10	25.00	-43.30	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	
D.1	-52.59	-38.21	M10 THRU'	
D.2	-52.59	38.21	M10 THRU'	
D.3	-20.09	61.82	M10 THRU'	
D.4	20.09	61.82	M10 THRU'	
D.5	52.59	38.21	M10 THRU'	
D.6	52.59	-38.21	M10 THRU'	
D.7	20.09	-61.82	M10 THRU'	
D.8	-20.09	-61.82	M10 THRU'	

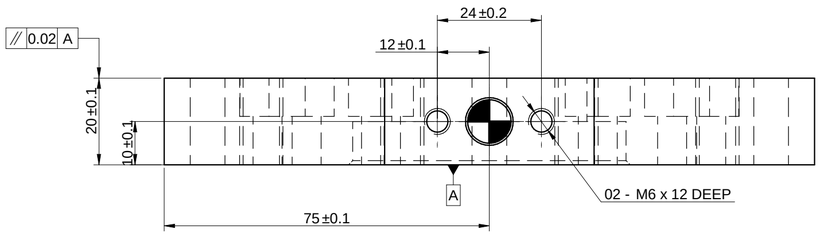

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE - USE INSERT TO ALL TAPPING HOLE



SECTION B-B
SCALE 1:1

NOTE : (English)
MATERIAL: AL HE30
FINISH: SELF-ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 0.72 kg

NOTE :-(French)
MATÉRIEL : AL HE30
FINITION : SELF-ANODIZING
MACHINES : 3.2
POIDS (Kg): 0.72 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **ROBOT PLATE**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
87.45 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. N.A. | PART CLASS. B | HEAT TREATMENT NA

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
01081635	03006480	03002882	#	P23Y5B073003	00	1 : 10
30/04/2024	30/04/2024	30/04/2024	NET WEIGHT-Kg 0.72 kg			SHEET 1 OF 1

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B073003.dft