

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

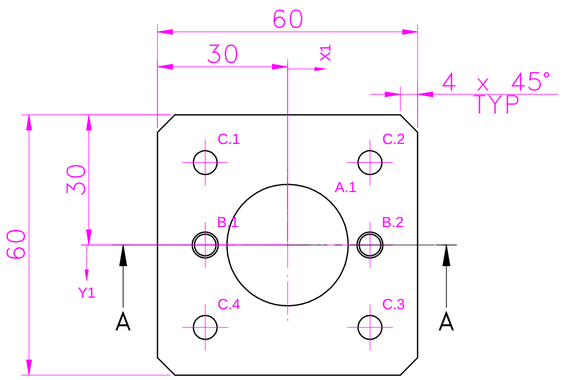



SCALE/ÉCHELLE 1:1

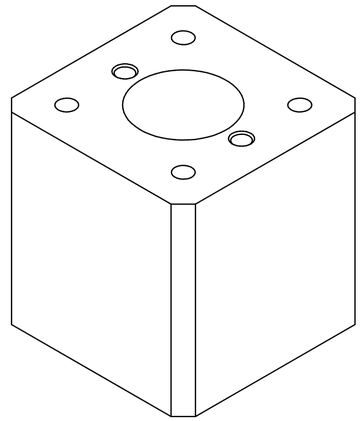

SCALE/ÉCHELLE 1:1

| HOLE TABLE | | | | |
|---|---|---|---|---|
| Hole | X | Y | Size | REMARK |
| A.1 | 0.00 | 0.00 | Ø 28.00 mm THRU' | REF SEC A–A |
| B.1 | –19.00 | 0.00 | Ø 5.00 mm x 20.00 mm DEEP | H7 |
| B.2 | 19.00 | 0.00 | Ø 5.00 mm x 20.00 mm DEEP | H7 |
| C.1 | –19.00 | 19.00 | Ø 5.50 mm THRU' | |
| C.2 | 19.00 | 19.00 | Ø 5.50 mm THRU' | |
| C.3 | 19.00 | –19.00 | Ø 5.50 mm THRU' | |
| C.4 | –19.00 | –19.00 | Ø 5.50 mm THRU' | |

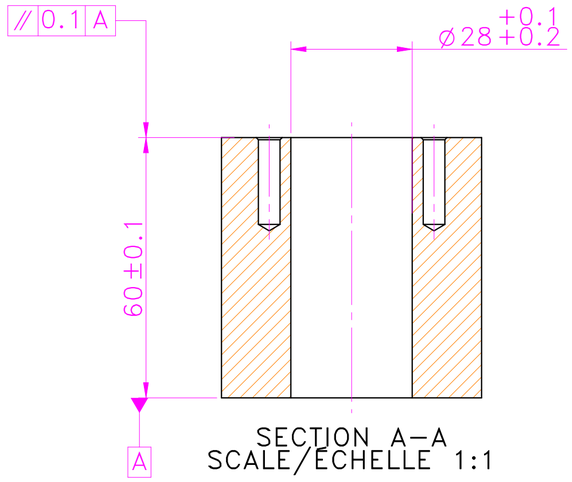


SECTION A–A
SCALE/ÉCHELLE 1:1

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/– 0.1

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
# MATERIAL: M.S.
# FINISH: I.Z.B.P. (TRIVALENT)
# MACHINING: 3.2
# WEIGHT(Kg ): 1.34 kg

NOTE :–(French)
# MATÉRIEL : M.S.
# FINITION : I.Z.B.P. (TRIVALENT)
# MACHINES : 3.2
# POIDS (Kg): 1.34 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

| DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED | |
|---|---|
| UNSP.RADII 0.5 R | UNSP.CHF. 0.5 X 45° |
| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm | |
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |
| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |
| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm | |
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |
| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| | | | |
| | | | |

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: CYLINDER BLOCK
DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 45.88 in^2 | # | # | WPES | 0300 | PL-02 | A2 |

REFERENCE DWG. ---
PART CLASS. B
HEAT TREATMENT ---

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL | DRG./PART CODE | REV. | SCALE |
|---|---|---|---|---|---|---|
| 03004476 | 03004785 | 03004785 | # | P23Y5B076007 | 00 | 1 : 1 |
| 24/06/2024 | 24/06/2024 | 24/06/2024 | NET WEIGHT-Kg 1.34 kg | | | SHEET 1 OF 1 |

\\srv01102\EXDM Uploading\2022-23\P23Y5\P23Y5B076007.dft