




NOTE : STANDARD FASTENER TORQUE AS PER PST-DES-01 PFR-DES-07-REV-05

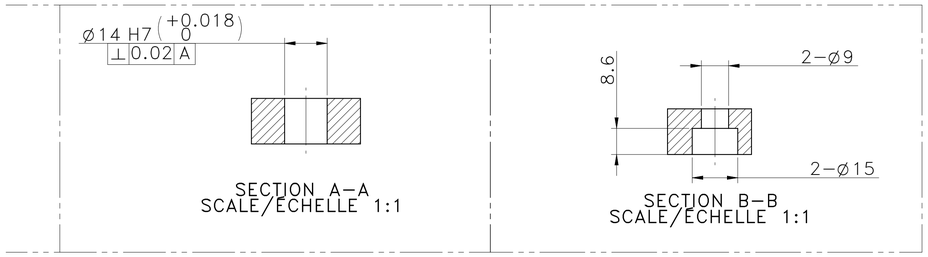


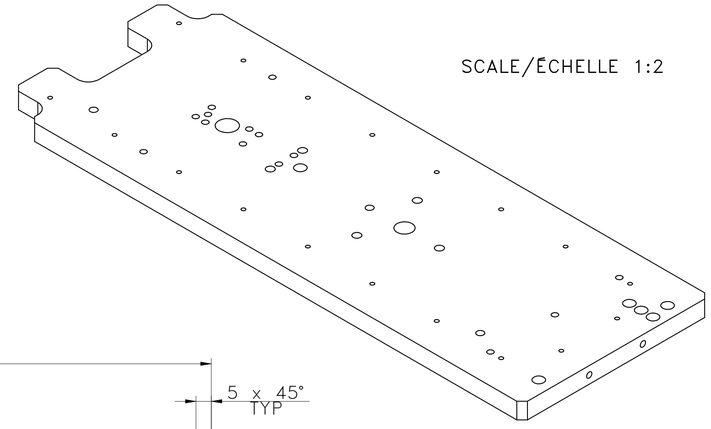

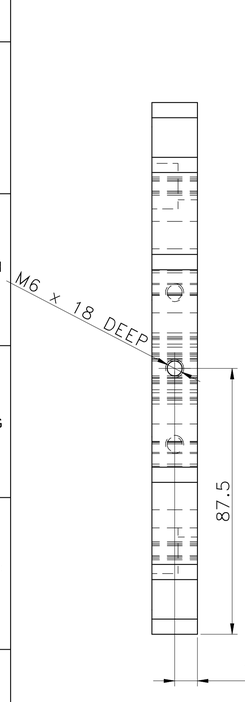

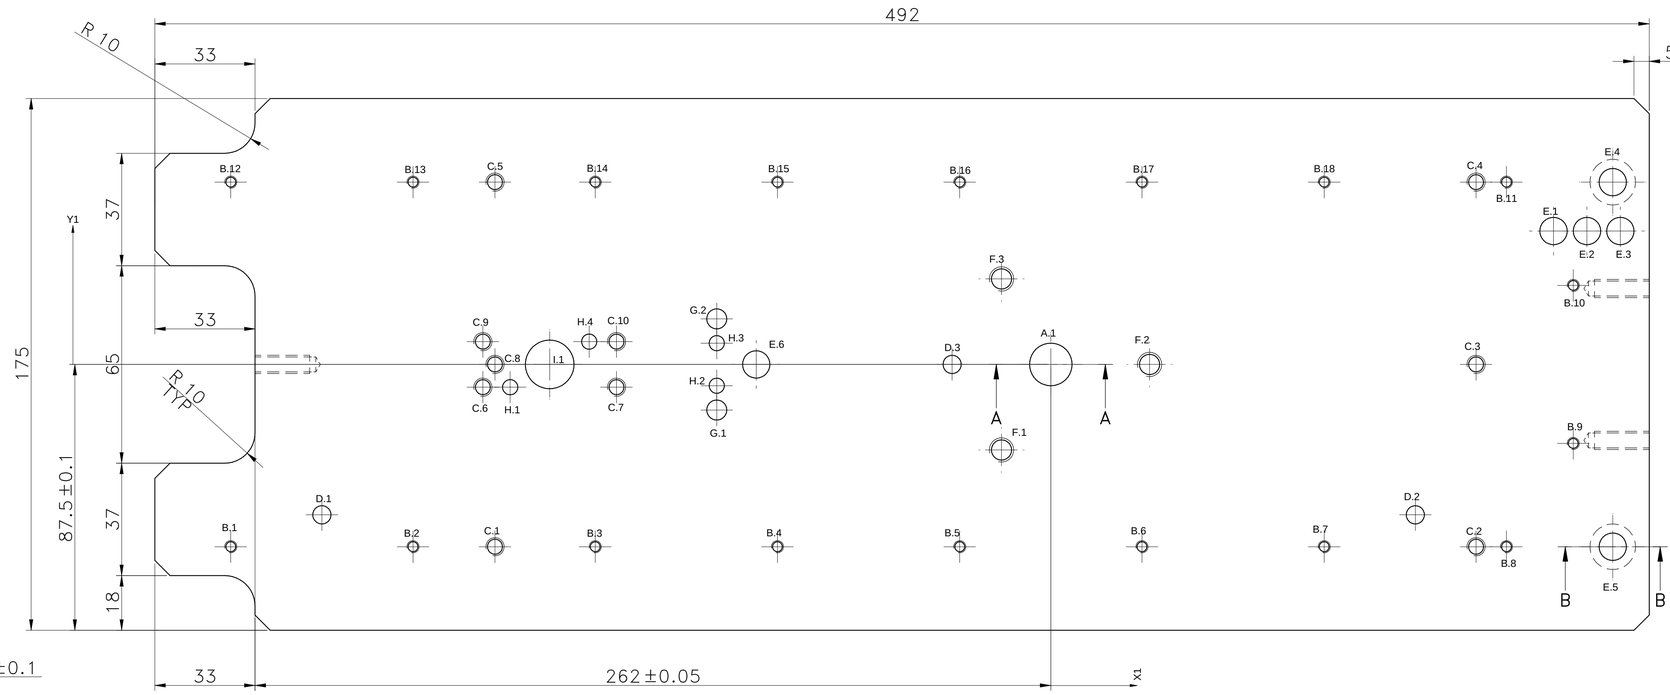

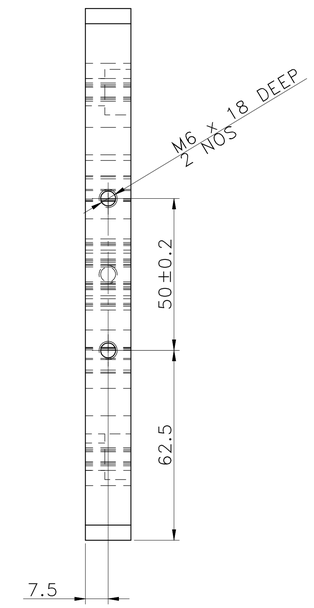

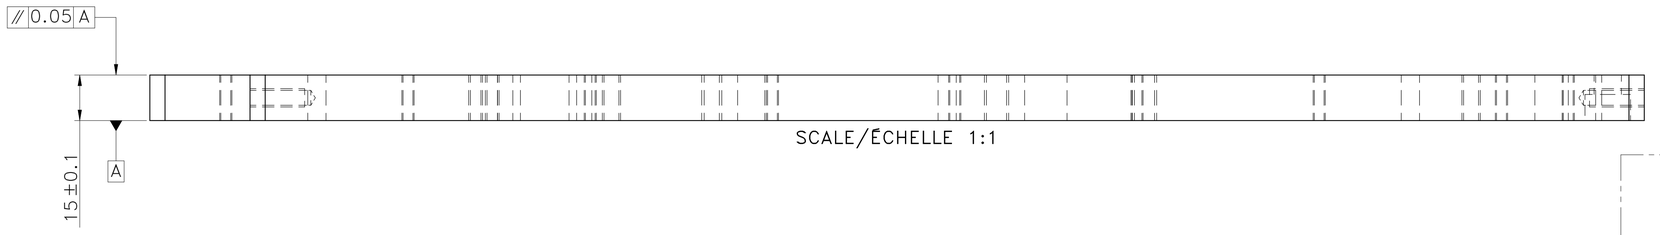

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : Error: No reference

NOTE : (English)
MATERIAL: M.S.
FINISH: IZBP
MACHINING: 3.2
WEIGHT(Kg): 9.53 kg

NOTE :-(French)
MATÉRIEL : M.S.
FINITION : IZBP
MACHINES : 3.2
POIDS (Kg): 9.53 kg

RESERVED SPACE FOR CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP RADII 0.5 R	UNSP CHF 0.5 X 45°

UNSPECIFIED TOL.(P.NB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(P.NB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI PRIVATE LIMITED
[Formerly Known as Precision Automation and Robotics India Limited]

www.wipropari.com

DESCRIPTION: BASE PLATE

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm.
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT, ASK TEAM MEMBER

SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg	TEAM NO.	SHEET SIZE
304.91 in^2	#	#	#	9.53 kg		A1

SURFACE FINISH | HEAT TREATMENT

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
03006330	03004785	03002882		P23Y5B076009	00	1 : 1
04/03/2024	04/03/2024	04/03/2024	PART CLASS. B			SHEET 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01102\Ex-DM Uploading\2022-23\P23Y5\P23Y5B076009.dft

NOTE : STANDARD FASTENER TORQUE AS PER PST-DES-01 PFR-DES-07-REV-05

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 14.00 mm THRU'	H7- REF SEC A-A
B.1	-270.00	-60.00	M4 THRU'	
B.2	-210.00	-60.00	M4 THRU'	
B.3	-150.00	-60.00	M4 THRU'	
B.4	-90.00	-60.00	M4 THRU'	
B.5	-30.00	-60.00	M4 THRU'	
B.6	30.00	-60.00	M4 THRU'	
B.7	90.00	-60.00	M4 THRU'	
B.8	150.00	-60.00	M4 THRU'	
B.9	172.00	-26.00	M4 THRU'	
B.10	172.00	26.00	M4 THRU'	
B.11	150.00	60.00	M4 THRU'	
B.12	-270.00	60.00	M4 THRU'	
B.13	-210.00	60.00	M4 THRU'	
B.14	-150.00	60.00	M4 THRU'	
B.15	-90.00	60.00	M4 THRU'	
B.16	-30.00	60.00	M4 THRU'	
B.17	30.00	60.00	M4 THRU'	
B.18	90.00	60.00	M4 THRU'	
C.1	-183.00	-60.00	M6 THRU'	
C.2	140.00	-60.00	M6 THRU'	
C.3	140.00	0.00	M6 THRU'	
C.4	140.00	60.00	M6 THRU'	
C.5	-183.00	60.00	M6 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
C.6	-187.00	-7.50	M6 THRU'	
C.7	-143.00	-7.50	M6 THRU'	
C.8	-183.00	0.00	M6 THRU'	
C.9	-187.00	7.50	M6 THRU'	
C.10	-143.00	7.50	M6 THRU'	
D.1	-240.00	-49.50	Ø 6.00 mm THRU'	H7
D.2	120.00	-49.50	Ø 6.00 mm THRU'	H7
D.3	-32.50	0.00	Ø 6.00 mm THRU'	H7
E.1	165.50	43.90	Ø 9.00 mm THRU'	
E.2	176.50	43.90	Ø 9.00 mm THRU'	
E.3	187.50	43.90	Ø 9.00 mm THRU'	
E.4	185.00	60.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.60 mm DEEP	REF SEC B-B
E.5	185.00	-60.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.60 mm DEEP	REF SEC B-B
E.6	-97.00	0.00	Ø 9.00 mm THRU'	
F.1	-16.25	-28.15	M8 THRU'	
F.2	32.50	0.00	M8 THRU'	
F.3	-16.25	28.15	M8 THRU'	
G.1	-110.00	-15.00	Ø 6.60 mm THRU'	
G.2	-110.00	15.00	Ø 6.60 mm THRU'	
H.1	-178.00	-7.50	Ø 5.00 mm THRU'	H7
H.2	-110.00	-7.00	Ø 5.00 mm THRU'	H7
H.3	-110.00	7.00	Ø 5.00 mm THRU'	H7
H.4	-152.00	7.50	Ø 5.00 mm THRU'	H7
I.1	-165.00	0.00	Ø 16.00 mm THRU'	

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN=0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
MATERIAL: M.S.
FINISH: IZBP
MACHINING: 3.2
WEIGHT(Kg): 9.53 kg

NOTE :-(French)
MATERIEL : M.S.
FINITION : IZBP
MACHINES : 3.2
POIDS (Kg): 9.53 kg

RESERVED SPACE FOR CONTROL
CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : Error: No reference

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

WIPRO PARI PRIVATE LIMITED
[Formerly Known as Precision Automation and Robotics India Limited]

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
4.LOCATION : PUNE

DESCRIPTION: BASE PLATE
DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg	TEAM NO.	SHEET SIZE
304.91 in^2	#	#	#	9.53 kg		A1

SURFACE FINISH | HEAT TREATMENT

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
03006330	03004785	03002882	PART CLASS: B	P23Y5B076009	00	1 : 1
04/03/2024	04/03/2024	04/03/2024				SHEET 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv0102\E:\eDM Uploading\2022-23\P23Y5\P23Y5B076009.dft