
NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00


NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.


NOTE:
1)USE HELICOIL INSERT AT ALL TAPPING HOLES

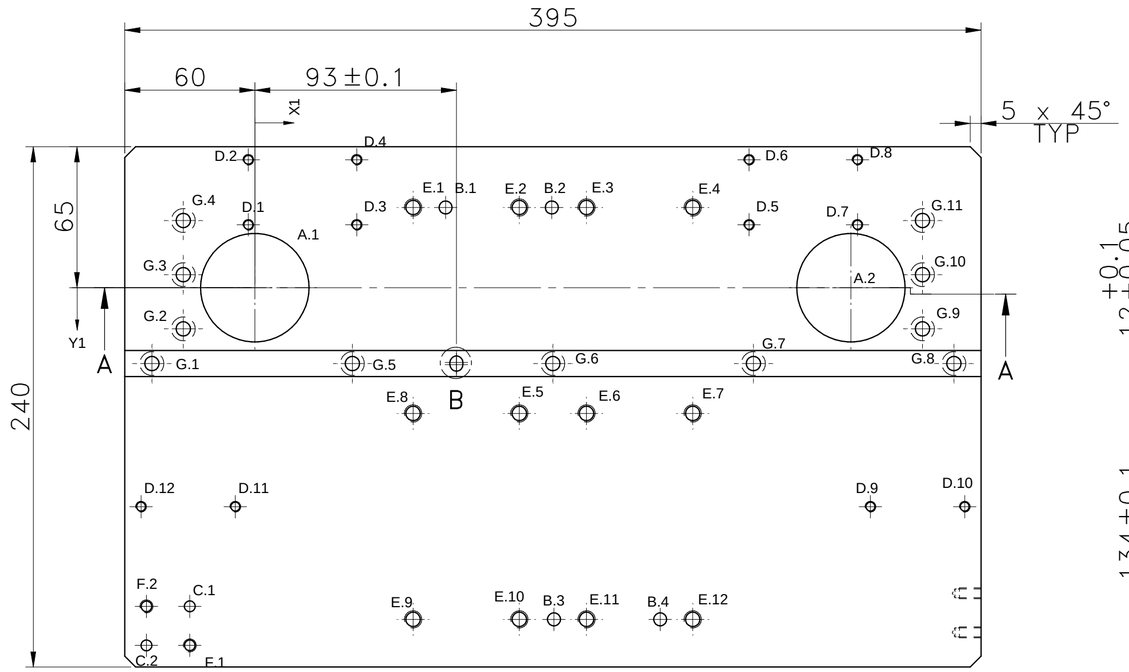


SCALE/ÉCHELLE 1:2

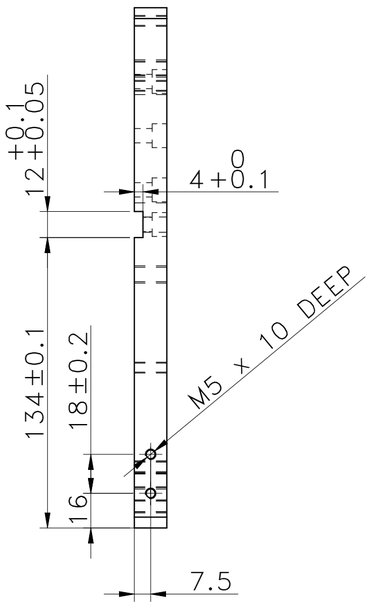


SCALE/ÉCHELLE 1:2

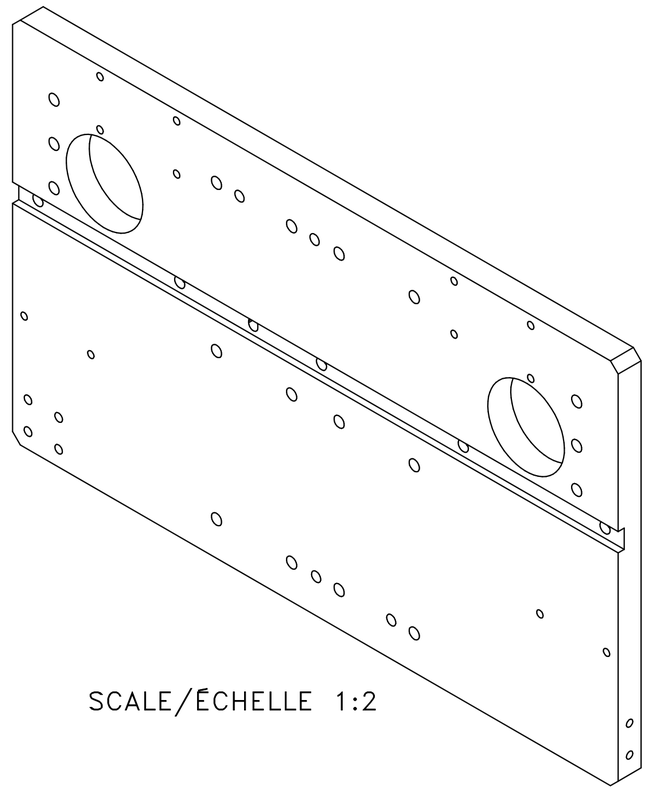

SCALE/ÉCHELLE 1:2

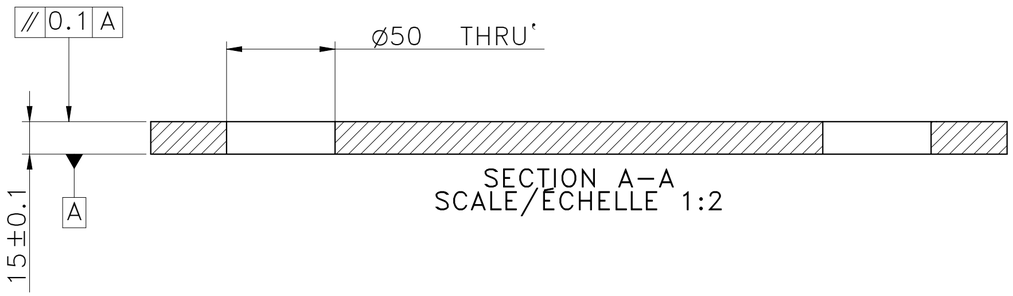

SECTION A-A
SCALE/ÉCHELLE 1:2

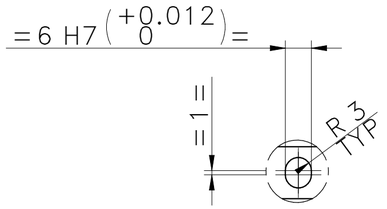

DETAIL B
SCALE/ÉCHELLE 1:1

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

NOTE : (English)
MATERIAL: Aluminum, 7075-T6
FINISH: SELF-ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 3.69 kg

NOTE :-(French)
MATERIEL : Aluminum, 7075-T6
FINITION : SELF-ANODIZING
MACHINES : 3.2
POIDS (Kg): 3.69 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

RESERVED SPACE FOR STAMP

CONTROLLED COPY

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **SLIDE BRACKET PLATE 2**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
338.97 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. --- PART CLASS. B HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03004476	03004785	03004785	#	P23Y5B076038	00	1 : 2
09/11/2024	09/11/2024	09/11/2024	NET WEIGHT-Kg 3.69 kg			SHEET 1 OF 2

\\srv01043\Ex.DM Uploading\2022-23\P23Y5\P23Y5B076038.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 50.00 mm THRU'	REF SEC A–A
A.2	275.00	0.00	Ø 50.00 mm THRU'	REF SEC A–A
B.1	88.00	37.00	Ø 6.00 mm THRU'	H7
B.2	137.00	37.00	Ø 6.00 mm THRU'	H7
B.3	138.00	−153.00	Ø 6.00 mm THRU'	H7
B.4	187.00	−153.00	Ø 6.00 mm THRU'	H7
C.1	−30.00	−147.00	Ø 5.00 mm THRU'	H7
C.2	−50.00	−165.00	Ø 5.00 mm THRU'	H7
D.1	−3.00	29.00	M5 THRU'	
D.2	−3.00	59.00	M5 THRU'	
D.3	47.00	29.00	M5 THRU'	
D.4	47.00	59.00	M5 THRU'	
D.5	228.00	29.00	M5 THRU'	
D.6	228.00	59.00	M5 THRU'	
D.7	278.00	29.00	M5 THRU'	
D.8	278.00	59.00	M5 THRU'	
D.9	284.00	−101.00	M5 THRU'	
D.10	327.50	−101.00	M5 THRU'	
D.11	−9.00	−101.00	M5 THRU'	
D.12	−52.50	−101.00	M5 THRU'	
E.1	73.00	37.00	M8 THRU'	
E.2	122.00	37.00	M8 THRU'	
E.3	153.00	37.00	M8 THRU'	
E.4	202.00	37.00	M8 THRU'	
E.5	122.00	−58.00	M8 THRU'	
E.6	153.00	−58.00	M8 THRU'	
E.7	202.00	−58.00	M8 THRU'	
E.8	73.00	−58.00	M8 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
E.9	73.00	−153.00	M8 THRU'	
E.10	122.00	−153.00	M8 THRU'	
E.11	153.00	−153.00	M8 THRU'	
E.12	202.00	−153.00	M8 THRU'	
F.1	−30.00	−165.00	M6 THRU'	
F.2	−50.00	−147.00	M6 THRU'	
G.1	−47.50	−35.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
G.2	−33.00	−19.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
G.3	−33.00	6.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
G.4	−33.00	31.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
G.5	45.00	−35.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
G.6	137.50	−35.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
G.7	230.00	−35.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
G.8	322.50	−35.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
G.9	308.00	−19.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
G.10	308.00	6.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
G.11	308.00	31.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/– 0.1

P2207–0109–10–066_PARI.par

NOTE : (English)
MATERIAL: Aluminum, 7075–T6
FINISH: SELF–ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 3.69 kg

NOTE :–(French)
MATÉRIEL : Aluminum, 7075–T6
FINITION : SELF–ANODIZING
MACHINES : 3.2
POIDS (Kg): 3.69 kg

RESERVED SPACE FOR CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MC) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MC) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP
www.wipropari.com

DESCRIPTION: SLIDE BRACKET PLATE 2
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
338.97 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	---	PART CLASS. B	HEAT TREATMENT	---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03004476	03004785	03004785	#	P23Y5B076038	00	1 : 2
09/11/2024	09/11/2024	09/11/2024	NET WEIGHT-Kg 3.69 kg			SHEET 2 OF 2

1. ALL DIMENSIONS ARE IN mm
2. DO NOT SCALE DRAWING.
3. IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\sn01043\E:\DM Uploading\2022-23\P23Y5\P23Y5B076038.dft