

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

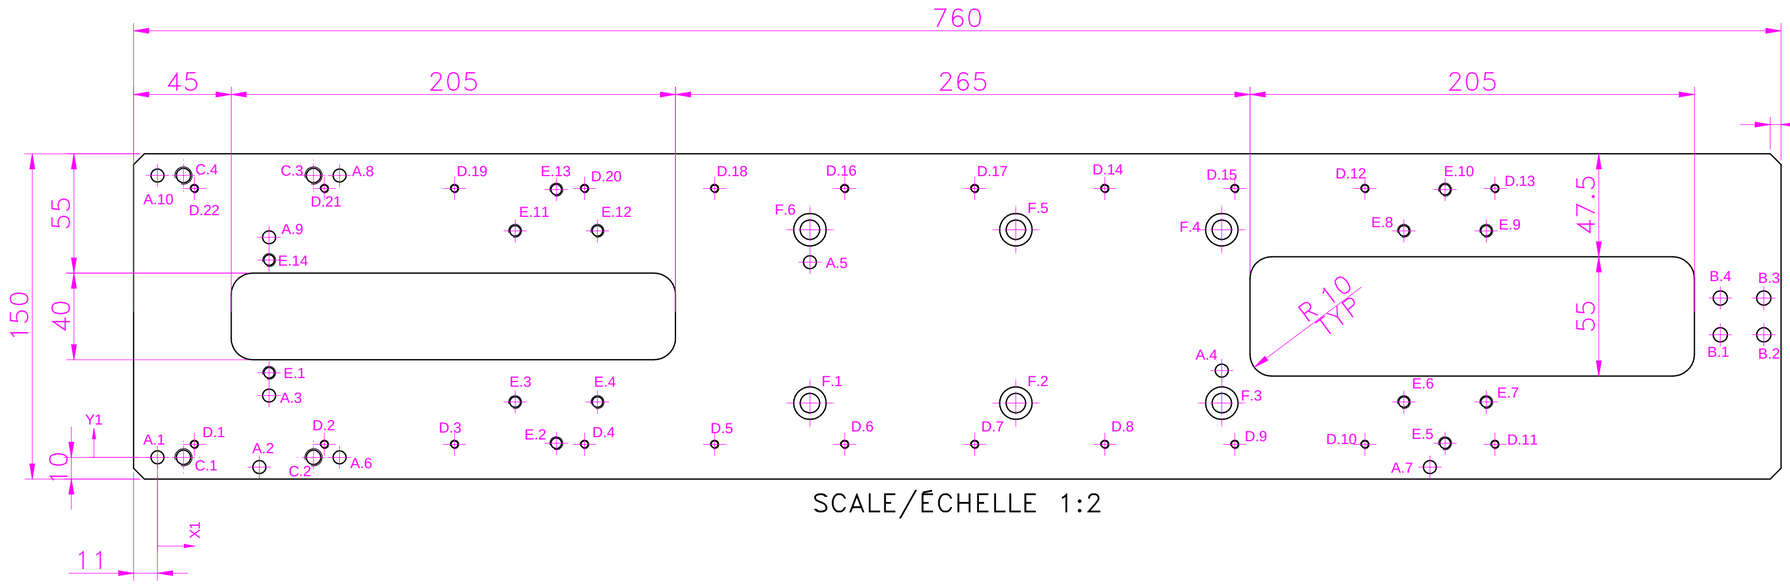

SCALE/ÉCHELLE 1:2

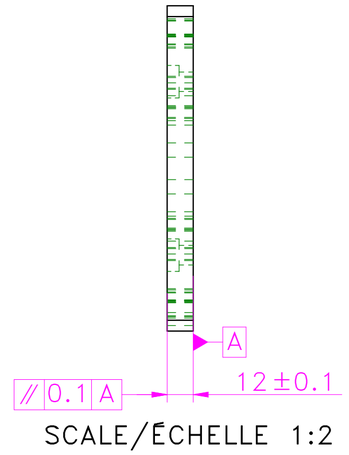

SCALE/ÉCHELLE 1:2


TOLERANCE NOTE :- (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/- 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/- 0.1

NOTE DE TOLERANCE :- (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/- 0.02 / IT7
2) TOUT TROU ET CONTRE-ALÉSAGE C.D,
DOIT ÊTRE CONTRÔLÉ SOUS +/- 0.1

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE:
1)USE HELICOIL INSERT AT ALL TAPPING HOLES

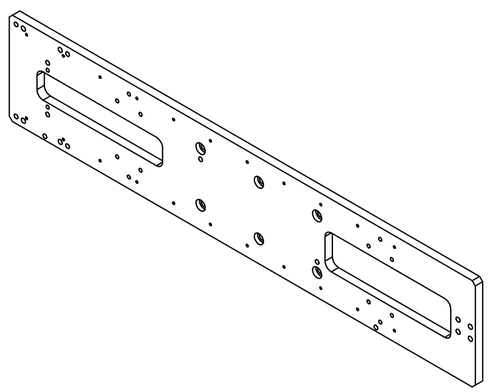

SCALE/ÉCHELLE 1:5

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

NOTE : (English)
MATERIAL: Aluminum, 7075-T6
FINISH: SELF-ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 3.12 kg

NOTE :-(French)
MATÉRIEL : Aluminum, 7075-T6
FINITION : SELF-ANODIZING
MACHINES : 3.2
POIDS (Kg): 3.12 kg

RESERVED SPACE FOR STAMP

CONTROLLED COPY

REVISION	DESCRIPTION	DATE	DRN.BY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION: BASE PLATE -SHIM PICKING UNIT
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
359.80 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. ---
PART CLASS. B
HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY
03004476	03004785	03004785
27/06/2024	27/06/2024	27/06/2024

MATERIAL: #
NET WEIGHT-Kg: 3.12 kg

DRG./PART CODE: P23Y5B076048
REV.: 00
SCALE: 1 : 1
SHEET: 1 OF 2

\\srv01102\ExDM Uploading\2022-23\P23Y5\P23Y5B076048.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm THRU'	H7
A.2	47.00	−4.50	Ø 6.00 mm THRU'	H7
A.3	51.50	28.50	Ø 6.00 mm THRU'	H7
A.4	491.00	40.00	Ø 6.00 mm THRU'	H7
A.5	301.00	90.00	Ø 6.00 mm THRU'	H7
A.6	84.00	0.00	Ø 6.00 mm THRU'	H7
A.7	587.00	−4.50	Ø 6.00 mm THRU'	H7
A.8	84.00	130.00	Ø 6.00 mm THRU'	H7
A.9	51.50	101.50	Ø 6.00 mm THRU'	H7
A.10	0.00	130.00	Ø 6.00 mm THRU'	H7
B.1	721.00	56.50	Ø 6.60 mm THRU'	
B.2	741.00	56.50	Ø 6.60 mm THRU'	
B.3	741.00	73.50	Ø 6.60 mm THRU'	
B.4	721.00	73.50	Ø 6.60 mm THRU'	
C.1	12.00	0.00	M8 THRU'	
C.2	72.00	0.00	M8 THRU'	
C.3	72.00	130.00	M8 THRU'	
C.4	12.00	130.00	M8 THRU'	
D.1	17.00	6.00	M4 THRU'	
D.2	77.00	6.00	M4 THRU'	
D.3	137.00	6.00	M4 THRU'	
D.4	197.00	6.00	M4 THRU'	
D.5	257.00	6.00	M4 THRU'	
D.6	317.00	6.00	M4 THRU'	
D.7	377.00	6.00	M4 THRU'	
D.8	437.00	6.00	M4 THRU'	
D.9	497.00	6.00	M4 THRU'	
D.10	557.00	6.00	M4 THRU'	
D.11	617.00	6.00	M4 THRU'	
D.12	557.00	124.00	M4 THRU'	
D.13	617.00	124.00	M4 THRU'	
D.14	437.00	124.00	M4 THRU'	
D.15	497.00	124.00	M4 THRU'	
D.16	317.00	124.00	M4 THRU'	
D.17	377.00	124.00	M4 THRU'	
D.18	257.00	124.00	M4 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
D.19	137.00	124.00	M4 THRU'	
D.20	197.00	124.00	M4 THRU'	
D.21	77.00	124.00	M4 THRU'	
D.22	17.00	124.00	M4 THRU'	
E.1	51.50	39.00	M6 THRU'	
E.2	184.00	6.50	M6 THRU'	
E.3	165.00	25.50	M6 THRU'	
E.4	203.00	25.50	M6 THRU'	
E.5	594.00	6.50	M6 THRU'	
E.6	575.00	25.50	M6 THRU'	
E.7	613.00	25.50	M6 THRU'	
E.8	575.00	104.50	M6 THRU'	
E.9	613.00	104.50	M6 THRU'	
E.10	594.00	123.50	M6 THRU'	
E.11	165.00	104.50	M6 THRU'	
E.12	203.00	104.50	M6 THRU'	
E.13	184.00	123.50	M6 THRU'	
E.14	51.50	91.00	M6 THRU'	
F.1	301.00	25.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 5.50 mm DEEP	
F.2	396.00	25.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 5.50 mm DEEP	
F.3	491.00	25.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 5.50 mm DEEP	
F.4	491.00	105.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 5.50 mm DEEP	

HOLE TABLE				
Hole	X	Y	Size	REMARK
F.5	396.00	105.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 5.50 mm DEEP	
F.6	301.00	105.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 5.50 mm DEEP	

NOTE : (English)
MATERIAL: Aluminum, 7075−T6
FINISH: SELF−ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 3.12 kg

NOTE :−(French)
MATÉRIEL : Aluminum, 7075−T6
FINITION : SELF−ANODIZING
MACHINES : 3.2
POIDS (Kg): 3.12 kg

RESERVED SPACE FOR STAMP

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP
www.wipropari.com

DESCRIPTION: BASE PLATE -SHIM PICKING UNIT
DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
359.80 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. — | PART CLASS. B | HEAT TREATMENT —

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03004476	03004785	03004785	#	P23Y5B076048	00	1 : 1
27/06/2024	27/06/2024	27/06/2024	NET WEIGHT-Kg 3.12 kg			SHEET 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv0102\E:\eDM Uploading\2022-23\P23Y5\P23Y5B076048.dft