

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00




TOP VIEW
SCALE/ECHELLE 1:1

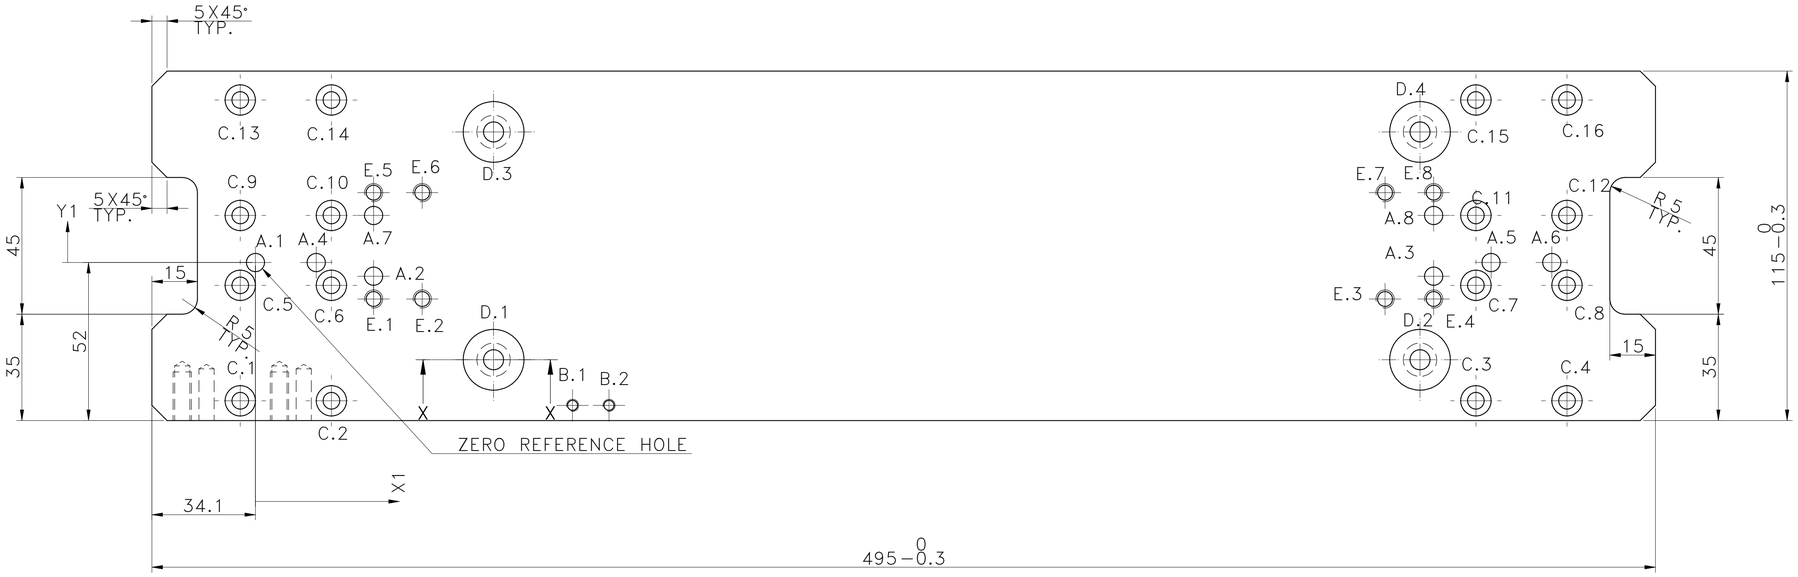

ISOMETRIC VIEW
SCALE/ECHELLE 1:2

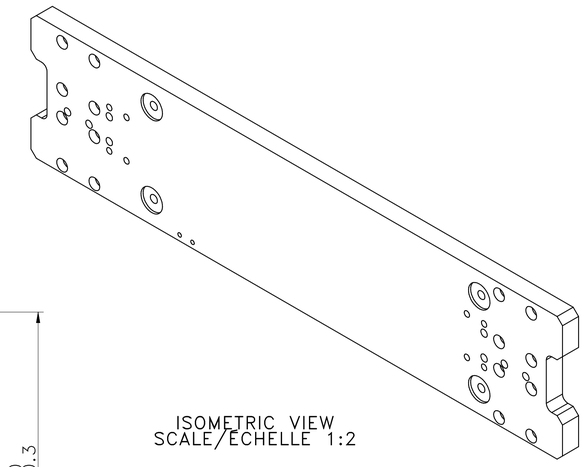

FRONT VIEW
SCALE/ECHELLE 1:1

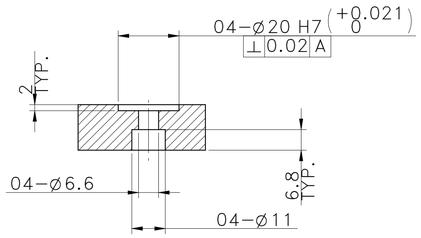

SECTION X-X
SCALE/ECHELLE 1:1

NOTE :-
USE HELICIL FOR TAPPING HOLES.

NOTE : (English)
MATERIAL: HE-30
FINISH: SELF-ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 2.26 kg

NOTE :-(French)
MATERIEL : HE-30
FINITION : SELF-ANODIZING
MACHINES : 3.2
POIDS (Kg): 2.26 kg

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DRAWING TYPE: MACHINING

DESCRIPTION: **SLIDER PLATE**

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
218.31 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT | ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
2891	03004785	03002882	#	P23Y5B076119	00	1 : 1
12/11/2024	12/11/2024	12/11/2024	NET WEIGHT-Kg 2.26 kg			SHEET 1 OF 2

\\srv01043\E-doc Uploading\2022-23\P23Y5\P23Y5B076119.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE FOR TOP VIEW				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm THRU'	H7 HOLE
A.2	38.90	−4.50	Ø 6.00 mm THRU'	H7 HOLE
A.3	387.90	−4.50	Ø 6.00 mm THRU'	H7 HOLE
A.4	20.00	0.00	Ø 6.00 mm THRU'	H7 HOLE
A.5	406.80	0.00	Ø 6.00 mm THRU'	H7 HOLE
A.6	426.80	0.00	Ø 6.00 mm THRU'	H7 HOLE
A.7	38.90	15.50	Ø 6.00 mm THRU'	H7 HOLE
A.8	387.90	15.50	Ø 6.00 mm THRU'	H7 HOLE
B.1	104.40	−47.00	M4 THRU'	
B.2	116.40	−47.00	M4 THRU'	
C.1	−5.00	−45.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.2	25.00	−45.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.3	401.80	−45.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.4	431.80	−45.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.5	−5.00	−7.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.6	25.00	−7.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.7	401.80	−7.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.8	431.80	−7.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.9	−5.00	15.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.10	25.00	15.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.11	401.80	15.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	

HOLE TABLE FOR TOP VIEW				
Hole	X	Y	Size	REMARK
C.12	431.80	15.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.13	−5.00	53.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.14	25.00	53.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.15	401.80	53.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
C.16	431.80	53.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	
D.1	78.40	−32.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	FROM BOTTOM SIDE REF. SECT. X−X
D.2	383.40	−32.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	FROM BOTTOM SIDE REF. SECT. X−X
D.3	78.40	43.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	FROM BOTTOM SIDE REF. SECT. X−X
D.4	383.40	43.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	FROM BOTTOM SIDE REF. SECT. X−X
E.1	38.90	−12.00	M6 THRU'	
E.2	54.90	−12.00	M6 THRU'	
E.3	371.90	−12.00	M6 THRU'	
E.4	387.90	−12.00	M6 THRU'	
E.5	38.90	23.00	M6 THRU'	
E.6	54.90	23.00	M6 THRU'	
E.7	371.90	23.00	M6 THRU'	
E.8	387.90	23.00	M6 THRU'	

TOLERANCE NOTE :−
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02./IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
MATERIAL: HE−30
FINISH: SELF−ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 2.26 kg

NOTE :−(French)
MATERIEL : HE−30
FINITION : SELF−ANODIZING
MACHINES : 3.2
POIDS (Kg): 2.26 kg

RESERVED SPACE FOR ... COPY

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP RADII 0.5 R	UNSP CHF. 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: SLIDER PLATE
DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
218.31 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
2891	03004785	03002882	#
12/11/2024	12/11/2024	12/11/2024	NET WEIGHT-Kg 2.26 kg

DRG./PART CODE: P23Y5B076119
REV.: 00
SCALE: 1 : 1
SHEET: 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E,d\M Uploading\2022-23\P23Y5\P23Y5B076119.dft