


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

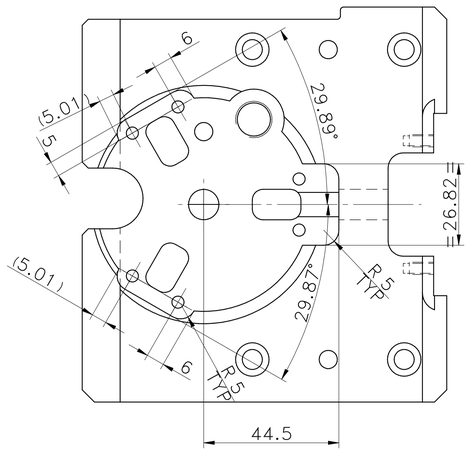


VIEW B
SCALE/ÉCHELLE 1:1

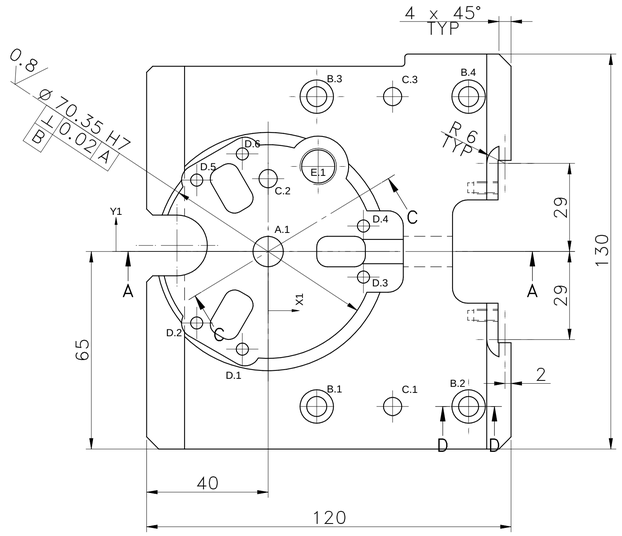


SCALE/ÉCHELLE 1:1

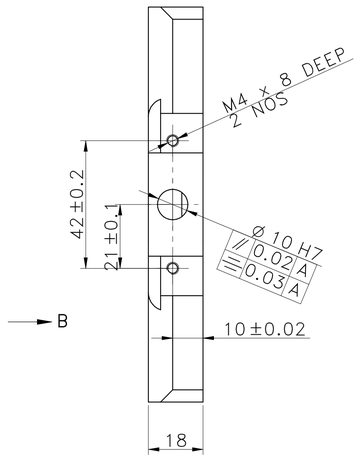


SCALE/ÉCHELLE 1:1

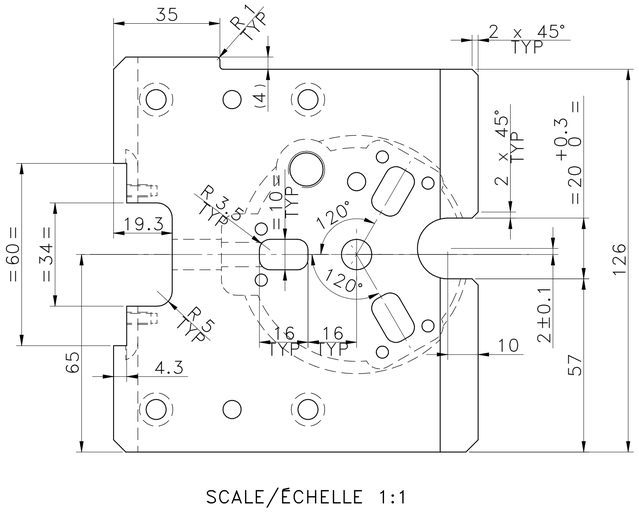


SCALE/ÉCHELLE 1:1

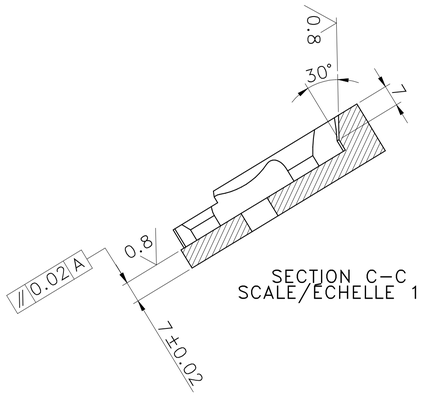


SECTION C–C
SCALE/ÉCHELLE 1:1

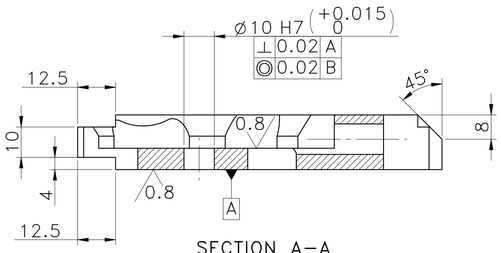

SECTION A–A
SCALE/ÉCHELLE 1:1

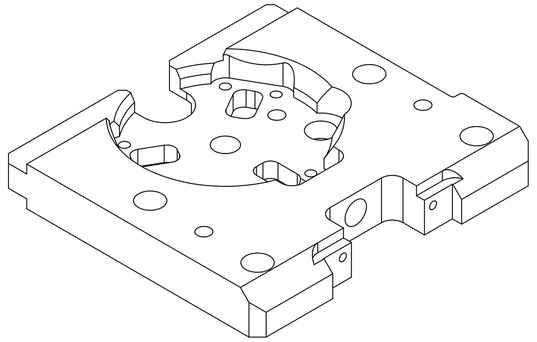

SCALE/ÉCHELLE 1:1



SECTION D–D
SCALE/ÉCHELLE 1:1

HEAT TREATMENT NOTE :– (English)
1) TO BE CASE HARDENED UPTO 56~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

NOTE POUR LE TRAITEMENT DE LA CHALEUR :–(French)
1) A ENDURCIR JUSQUDA 56~60 HRC.
2) PROFONDEUR DU TRAITEMENT 0.8 ~ 1.2MM.
3) MAINTENIR LES FILTAGES PROPRE
4) RE–TARAUDAGE A FAIRE APRES TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (SDIL Y A LIEU)

NOTE T + S :– (English)

HEAT TREATMANT PROCESS	:XXXXXX
HARDNESS & DEPTH	: REF NOTE
FINISH & DEPTH	: REF NOTE
TEST COUPON SIZE	:130*120*18(20mmLENGTH–0
WELD CLASS	: B IF APPLICABLE

MATERIAL TEST CERTIFICATE REPORT REQURIED
NON DESTRUCTIVE TESTING

NO SAW MATERIAL ULTRASONIC TEST	HEAT TREATMENT DIE PENETRATION TEST + ULTRASONIC TEST	FINISH COMPOMENT MAGNETIC PARTICLE INSPECTION

NOTE T + S :– (French)


PROCÉDÉ H.T.	: XXXXXX
DURETÉ ET PROFONDEUR	: REF NOTE
FINITION ET PROFONDEUR	: REF NOTE
DIMENSION TEST COUPON	:130*120*18(20mmLENGTH–0
CLASSE D'USINAGE	: B IF APPLICABLE

RAPPORT DU CTM REQUIS
CONTRÔLE NON DESTRUCTIF

MATIÈRE PREMIÈRE TEST ULTRASONIQUE	TRAITEMENT DE LA CHALEUR TEST DE PÉNÉTRATION DE MATRICE + TEST ULTRASONIQUE	COMPOSANT DE FINITION INSPECTION MAGNÉTIQUE DES PARTICULES

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.



SCALE/ÉCHELLE 1:2

NOTE : (English)
MATERIAL: 20MnCr5
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2/(0.8/)
WEIGHT(Kg): 1.42 kg

NOTE :–(French)
MATÉRIEL : 20MnCr5
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2/(0.8/)
POIDS (Kg): 1.42 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: SHIM FIXTURE 1
DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
66.18 in^2	#	#	WPES	0300	PL-02	A1
REFERENCE DWG.	–	PART CLASS.T+S		HEAT TREATMENT	REF.NOTE	


DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006751	03004785	03002882	#	P23Y5B076122	00	1 : 1
12/11/2024	12/11/2024	12/11/2024	NET WEIGHT-Kg 1.42 kg			SHEET 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E-DM Uploading\2022-23\P23Y5\P23Y5B076122.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 10.00 mm THRU'	REF SECTION A–A
B.1	16.00	–51.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 11.80 mm DEEP	REF SECTION D–D
B.2	66.00	–51.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 11.80 mm DEEP	REF SECTION D–D
B.3	16.00	51.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 11.80 mm DEEP	REF SECTION D–D
B.4	66.00	51.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 11.80 mm DEEP	REF SECTION D–D
C.1	41.00	–51.00	Ø 6.00 mm THRU'	H7
C.2	0.00	24.00	Ø 6.00 mm THRU'	H7
C.3	41.00	51.00	Ø 6.00 mm THRU'	H7
D.1	–8.48	–32.13	Ø 4.00 mm THRU'	H7
D.2	–23.50	–23.51	Ø 4.00 mm THRU'	H7
D.3	31.39	–8.41	Ø 4.00 mm THRU'	H7
D.4	31.39	8.41	Ø 4.00 mm THRU'	H7
D.5	–23.50	23.51	Ø 4.00 mm THRU'	H7
D.6	–8.48	32.14	Ø 4.00 mm THRU'	H7
E.1	16.50	28.00	M12 x 1 THRU'	

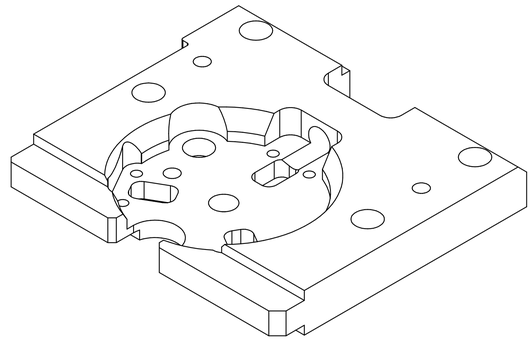

SCALE/ECHELLE 1:1

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/– 0.1

NOTE : (English)
MATERIAL: 20MnCr5
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2/(0.8/)
WEIGHT(Kg): 1.42 kg

NOTE :–(French)
MATERIEL : 20MnCr5
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2/(0.8/)
POIDS (Kg): 1.42 kg

RESERVED SPACE FOR CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wipropari.com

DESCRIPTION: **SHIM FIXTURE 1**

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
66.18 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	–	PART CLASS.T+S	HEAT TREATMENT	REF.NOTE

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006751	03004785	03002882	#	P23Y5B076122	00	1 : 1
12/11/2024	12/11/2024	12/11/2024	NET WEIGHT-Kg 1.42 kg			SHEET 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

\\sn01043\E-cdm Uploading\2022-23\P23Y5\P23Y5B076122.dft