


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

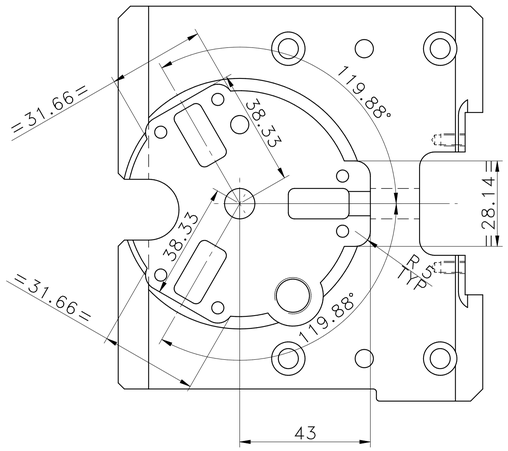


VIEW B
SCALE/ÉCHELLE 1:1

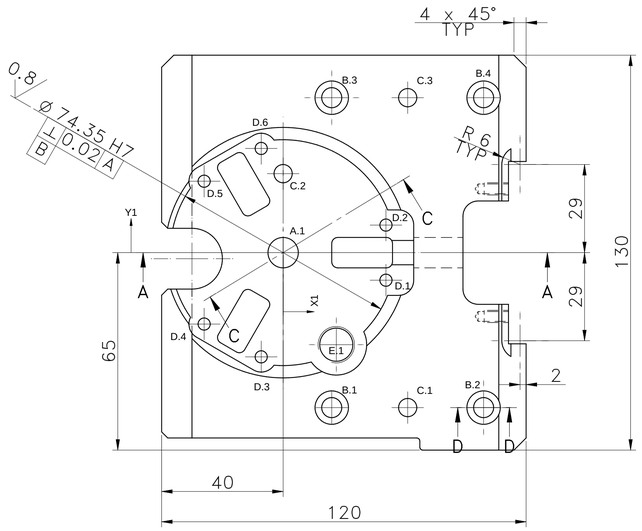


SCALE/ÉCHELLE 1:1

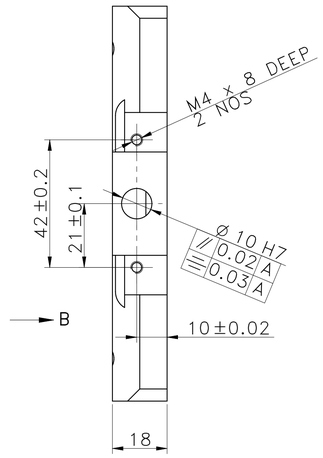


SCALE/ÉCHELLE 1:1

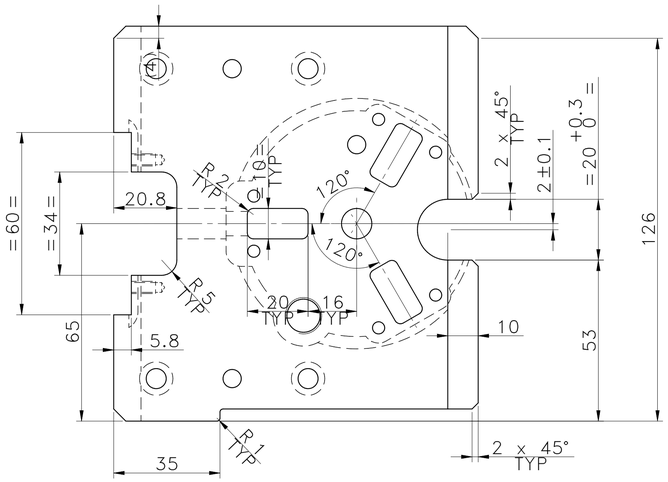


SCALE/ÉCHELLE 1:1

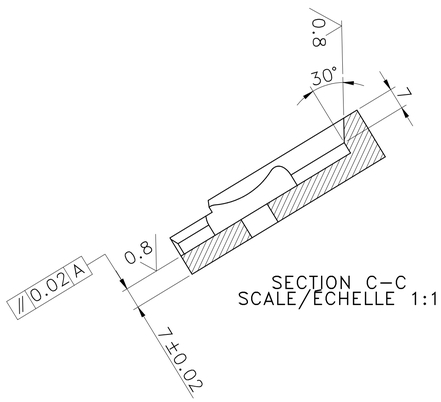


SECTION C–C
SCALE/ÉCHELLE 1:1

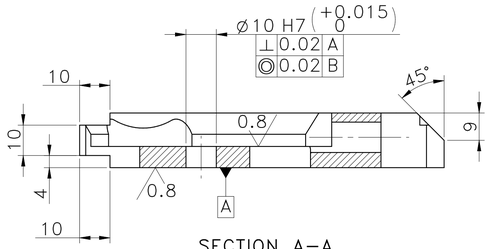


SECTION A–A
SCALE/ÉCHELLE 1:1

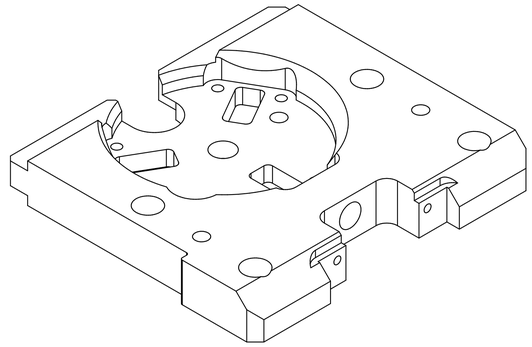

SCALE/ÉCHELLE 1:1



SECTION D–D
SCALE/ÉCHELLE 1:1



SCALE/ÉCHELLE 1:2

HEAT TREATMENT NOTE :– (English)
1) TO BE CASE HARDENED UPTO 56~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

NOTE POUR LE TRAITEMENT DE LA CHALEUR :–(French)
1) A ENDURCIR JUSQUDA 56~60 HRC.
2) PROFONDEUR DU TRAITEMENT 0.8 ~ 1.2MM.
3) MAINTENIR LES FILTAGES PROPRE
4) RE–TARAUDAGE A FAIRE APRES TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (SOIL Y A LIEU)

NOTE T + S :– (English)

HEAT TREATMANT PROCESS:XXXXXX HARDNESS & DEPTH : REF NOTE FINISH & DEPTH : REF NOTE TEST COUPON SIZE :130*120*18(20mmLENGTH–0 WELD CLASS : B IF APPLICABLE	MATERIAL TEST CERTIFICATE REPORT REQURIED NON DESTRUCTIVE TESTING RAW MATERIAL ULTRASONIC TEST | HEAT TREATMENT DIE PENETRATION TEST + ULTRASONIC TEST | FINISH COMPOMENT MAGNETIC PARTICLE INSPECTION

NOTE T + S :– (French)

PROCÉDÉ H.T. : XXXXXX DURETÉ ET PROFONDEUR : REF NOTE FINITION ET PROFONDEUR : REF NOTE DIMENSION TEST COUPON :130*120*18(20mmLENGTH–0 CLASSE D'USINAGE : B IF APPLICABLE	RAPPORT DU CTM REQUIS CONTRÔLE NON DESTRUCTIF MATIÈRE PREMIÈRE TEST ULTRASONIQUE | TRAITEMENT DE LA CHALEUR TEST DE PÉNÉTRATION DE MATRICE + TEST ULTRASONIQUE | COMPOSANT DE FINITION INSPECTION MAGNÉTIQUE DES PARTICULES

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

NOTE : (English)
MATERIAL: 20MnCr5
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2(0.8)
WEIGHT(Kg): 1.39 kg

NOTE :–(French)
MATÉRIEL : 20MnCr5
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2(0.8)
POIDS (Kg): 1.39 kg

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP RADII 0.5 R	UNSP CHF 0.5 X 45°
UNSPECIFIED TOL (FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL (FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL (MC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL (MC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
1	MISSING HOLE ADDED.(REF HOLE TABLE D3 TO D6)	03/01/2024	03006751

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: SHIM FIXTURE 2
DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT, ASK TEAM MEMBER

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
65.81 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. -- | PART CLASS.T+S | HEAT TREATMENT | REF NOTE

LOCATION : PUNE


© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006751	03004785	03002882	#	P23Y5B076123	01	1 : 1
03/01/2025	03/01/2025	03/01/2025	NET WEIGHT-Kg 1.39 kg			SHEET 1 OF 2

\\srv01043\c-DM Uploading\2022 -23\P23Y5\P23Y5B076123.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 10.00 mm THRU'	REF SECTION A–A
B.1	16.00	–51.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 11.80 mm DEEP	REF SECTION D–D
B.2	66.00	–51.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 11.80 mm DEEP	REF SECTION D–D
B.3	16.00	51.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 11.80 mm DEEP	REF SECTION D–D
B.4	66.00	51.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 11.80 mm DEEP	REF SECTION D–D
C.1	41.00	–51.00	Ø 6.00 mm THRU'	H7
C.2	0.00	26.00	Ø 6.00 mm THRU'	H7
C.3	41.00	51.00	Ø 6.00 mm THRU'	H7
D.1	33.86	–9.07	Ø 4.00 mm THRU'	H7
D.2	33.86	9.07	Ø 4.00 mm THRU'	H7
D.3	–7.22	–34.30	Ø 4.00 mm THRU' (1)	H7
D.4	–26.00	–23.51	Ø 4.00 mm THRU' (1)	H7
D.5	–26.00	23.51	Ø 4.00 mm THRU' (1)	H7
D.6	–7.22	34.30	Ø 4.00 mm THRU' (1)	H7
E.1	17.50	–30.30	M12 x 1 THRU'	

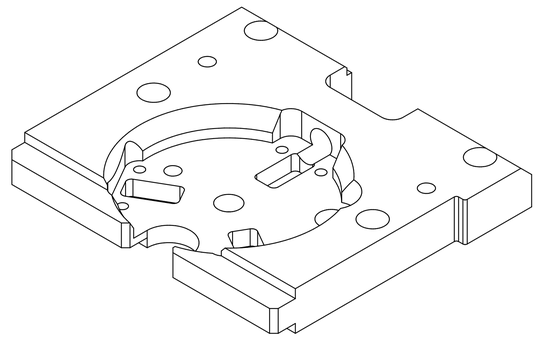

SCALE/ÉCHELLE 1:1

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/– 0.1

NOTE : (English)
MATERIAL: 20MnCr5
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2√ (0.8√)
WEIGHT(Kg): 1.39 kg

NOTE :–(French)
MATÉRIEL : 20MnCr5
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2√ (0.8√)
POIDS (Kg): 1.39 kg

RESERVED SPACE FOR CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
1	MISSING HOLE ADDED.(REF HOLE TABLE D3 TO D6)	03/01/2024	03006751

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

DESCRIPTION: **SHIM FIXTURE 2**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
65.81 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	–	PART CLASS. T+S	HEAT TREATMENT	REF NOTE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006751	03004785	03002882	#	P23Y5B076123	01	1 : 1
03/01/2025	03/01/2025	03/01/2025	NET WEIGHT-Kg 1.39 kg			SHEET 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\sm01043\E:\eDM Uploading\2022-23\P23Y5\P23Y5B076123.dft