

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00




TOP VIEW
SCALE/ECHELLE 1:1

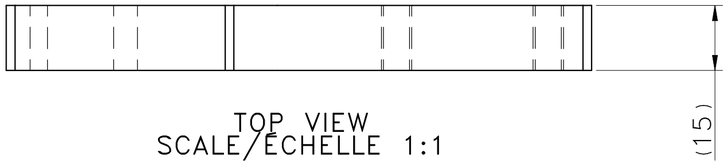


FRONT VIEW
SCALE/ECHELLE 1:1

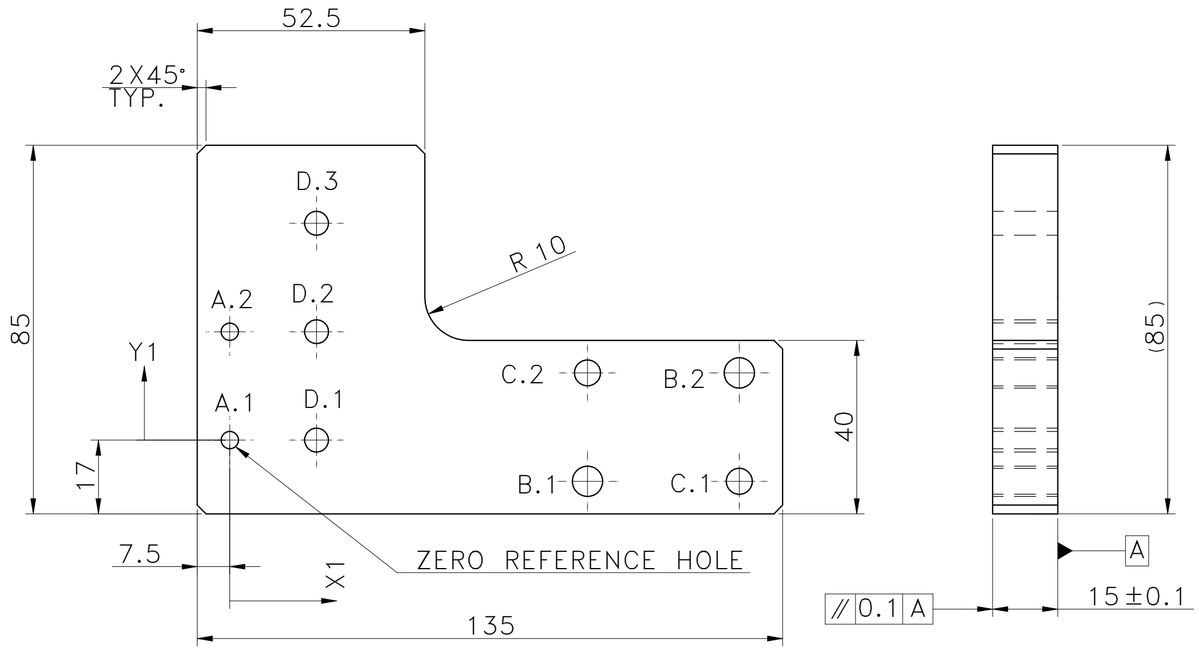



R.H.SIDE VIEW
SCALE/ECHELLE 1:1

| HOLE TABLE | | | | |
|---|---|---|---|---|
| Hole | X | Y | Size | REMARK |
| A.1 | 0.00 | 0.00 | Ø 4.00 mm THRU' | H7 HOLE |
| A.2 | 0.00 | 25.00 | Ø 4.00 mm THRU' | H7 HOLE |
| B.1 | 82.50 | −9.50 | Ø 7.00 mm THRU' | |
| B.2 | 117.50 | 15.50 | Ø 7.00 mm THRU' | |
| C.1 | 117.50 | −9.50 | Ø 6.00 mm THRU' | H7 HOLE |
| C.2 | 82.50 | 15.50 | Ø 6.00 mm THRU' | H7 HOLE |
| D.1 | 20.00 | 0.00 | Ø 5.50 mm THRU' | |
| D.2 | 20.00 | 25.00 | Ø 5.50 mm THRU' | |
| D.3 | 20.00 | 50.00 | Ø 5.50 mm THRU' | |

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

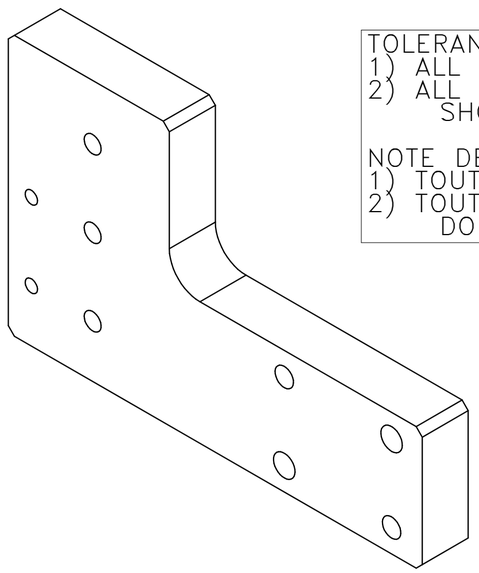

ISOMETRIC VIEW
SCALE/ECHELLE 1:1

TOLERANCE NOTE :− (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/− 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/− 0.1

NOTE DE TOLERANCE :− (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/− 0.02 / IT7
2) TOUT TROU ET CONTRE−ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/− 0.1

NOTE : (English)
# MATERIAL: HE−30
# FINISH: SELF−ANODIZING
# MACHINING: 3.2
# WEIGHT(Kg ): 0.32 kg

NOTE :−(French)
# MATÉRIEL : HE−30
# FINITION : SELF−ANODIZING
# MACHINES : 3.2
# POIDS (Kg): 0.32 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR CONTROL

CONTROLLED COPY

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| . | . | . | . |
| . | . | . | . |

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

| UNSP.RADII | UNSP.CHF. |
|---|---|
| 0.5 R | 0.5 X 45° |

| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |

| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |

| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |

| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |

LIMITS
Gen Tol.: IS 2102

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: CYLINDER MTG PLATE
DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 37.07 in^2 | # | # | WP1 | 0300 | | A2 |

REFERENCE DWG. ---
PART CLASS.
HEAT TREATMENT ---

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL |
|---|---|---|---|
| 03006330 | 03004785 | 03002882 | # |
| 09/11/2024 | 09/11/2024 | 09/11/2024 | NET WEIGHT-Kg 0.32 kg |

DRG./PART CODE: P23Y5B076159
REV.: 00
SCALE: 1 : 1
SHEET: 1 OF 1

\\srv01043\E:DM Uploading\2022-23\P23Y5\P23Y5B076159.dft