

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

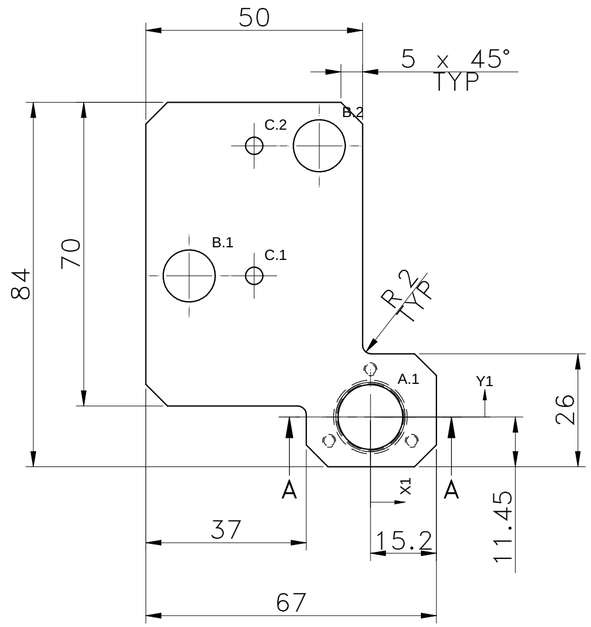


SCALE/ÉCHELLE 1:1

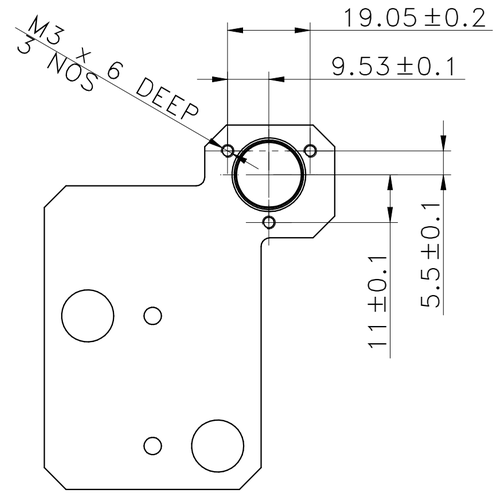



VIEW B
SCALE/ÉCHELLE 1:1


| HOLE TABLE | | | | |
|---|---|---|---|---|
| Hole | X | Y | Size | REMARK |
| A.1 | 0.00 | 0.00 | M16 x 1 THRU' | REF SECTION A–A |
| B.1 | −41.80 | 32.55 | Ø 12.00 mm THRU' | |
| B.2 | −11.80 | 62.55 | Ø 12.00 mm THRU' | |
| C.1 | −26.80 | 32.55 | Ø 4.00 mm THRU' | H7 |
| C.2 | −26.80 | 62.55 | Ø 4.00 mm THRU' | H7 |

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/– 0.1

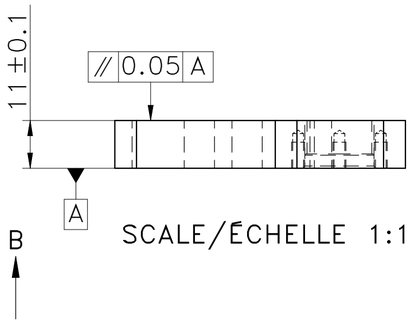


SCALE/ÉCHELLE 1:1

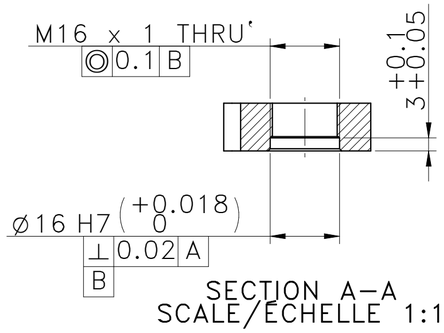



SECTION A–A
SCALE/ÉCHELLE 1:1

NOTE :–
USE HELICIL FOR TAPPING HOLES.

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

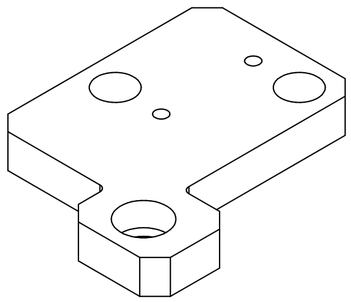

SCALE/ÉCHELLE 1:1

NOTE : (English)
# MATERIAL: HE 30
# FINISH: SELF–ANODIZING
# MACHINING: 3.2
# WEIGHT(Kg ): 0.11 kg

NOTE :–(French)
# MATÉRIEL : HE 30
# FINITION : SELF–ANODIZING
# MACHINES : 3.2
# POIDS (Kg): 0.11 kg

RESERVED SPACE FOR CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

| UNSP.RADII | UNSP.CHF. |
|---|---|
| 0.5 R | 0.5 X 45° |

| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm | |
|---|---|
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |

| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |

| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm | |
|---|---|
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |

| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| . | . | . | . |
| . | . | . | . |

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

| DESCRIPTION | DRAWING TYPE |
|---|---|
| DIAL GAUGE HOLDER | MACHINING |

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 18.84 in^2 | # | # | WPES | 0300 | PL-02 | A2 |

| REFERENCE DWG. | --- | PART CLASS. B | HEAT TREATMENT | --- |
|---|---|---|---|---|

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL | DRG./PART CODE | REV. | SCALE |
|---|---|---|---|---|---|---|
| 03006751 | 03004785 | 03002882 | # | P23Y5B076162 | 00 | 1 : 1 |
| 09/11/2024 | 09/11/2024 | 09/11/2024 | NET WEIGHT-Kg 0.11 kg | | | SHEET 1 OF 1 |

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B076162.dft