


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

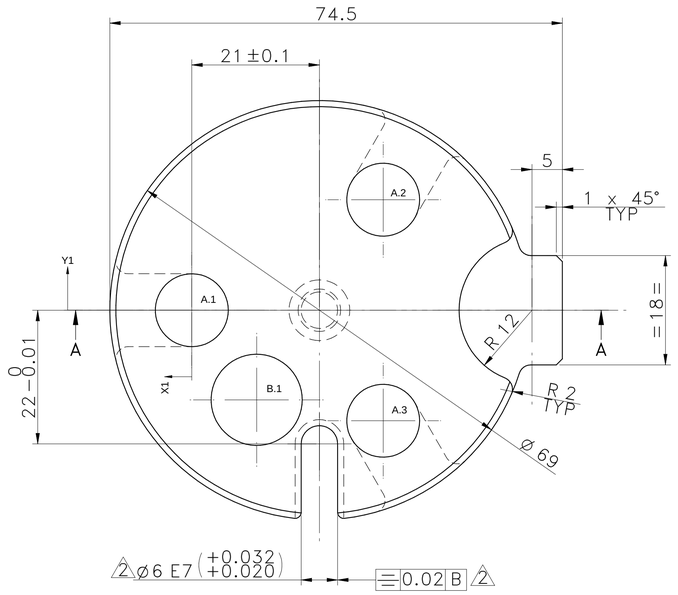


SCALE/ÉCHELLE 2:1

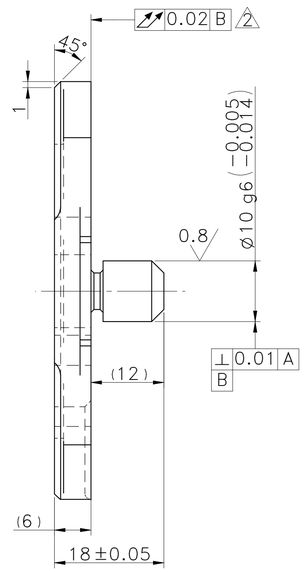


SCALE/ÉCHELLE 2:1

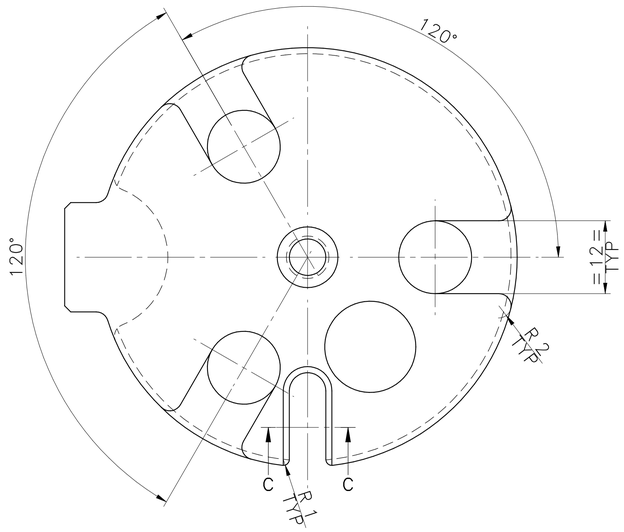


SCALE/ÉCHELLE 2:1




SECTION C–C
SCALE/ÉCHELLE 2:1

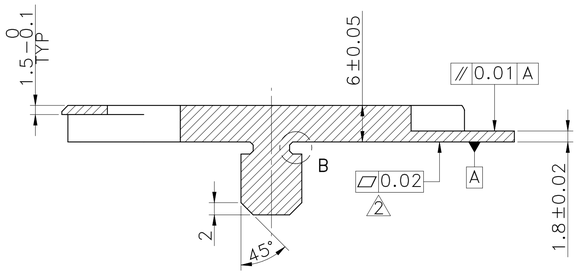


SECTION A–A
SCALE/ÉCHELLE 2:1



DETAIL B
SCALE/ÉCHELLE 5:1

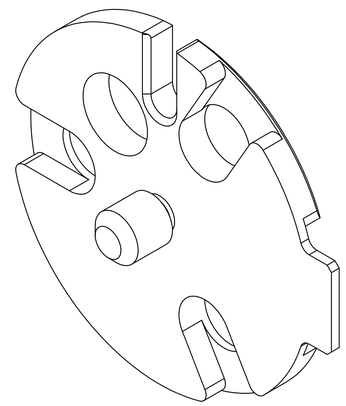

SCALE/ÉCHELLE 2:1

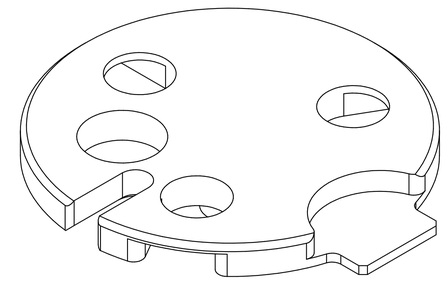

SCALE/ÉCHELLE 2:1

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 12.00 mm THRU'	
A.2	31.50	18.19	Ø 12.00 mm THRU'	
A.3	31.50	−18.19	Ø 12.00 mm THRU'	
B.1	10.68	−14.74	Ø 15.00 mm THRU'	

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALESAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/– 0.1

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE T + S :– (English) 1

HEAT TREATMANT PROCESS: REF NOTE
HARDNESS & DEPTH : REF NOTE HRc
FINISH & DEPTH :REF NOTE
TEST COUPON SIZE :Ø69 (20mmLENGTH–01NOS)
WELD CLASS : B IF APPLICABLE

MATERIAL TEST CERTIFICATE REPORT REQURIED
NON DESTRUCTIVE TESTING

RAW MATERIAL ULTRASONIC TEST	HEAT TREATMENT DIE PENETRATION TEST + ULTRASONIC TEST	FINISH COMPOMENT MAGNETIC PARTICLE INSPECTION

NOTE T + S :– (French)

PROCÉDÉ H.T. : REF NOTE
DURETÉ ET PROFONDEUR : REF NOTE HRc
FINITION ET PROFONDEUR : REF NOTE
DIMENSION TEST COUPON :Ø69 (20mmLENGTH–01NOS)
CLASSE D'USINAGE : B IF APPLICABLE

RAPPORT DU CTM REQUIS
CONTRÔLE NON DESTRUCTIF

MATIÈRE PREMIÈRE TEST ULTRASONIQUE	TRAITEMENT DE LA CHALEUR TEST DE PÉNÉTRATION DE MATRICE + TEST ULTRASONIQUE	COMPOSANT DE FINITION INSPECTION MAGNÉTIQUE DES PARTICULES

NOTE FOR D2 MATERIAL :–
TO BE VACCUM HARDENED 55~60 HRC.

NOTE : (English)
MATERIAL: D2
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2 (1.6)
WEIGHT(Kg): 0.14 kg

NOTE :–(French)
MATÉRIEL : D2
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2 (1.6)
POIDS (Kg): 0.14 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

REVISION	DESCRIPTION	DATE	DRN.BY
2	FLATNESS ADDED & TOLERANCE UPDATED	17/04/2025	03006330
1	T+S NOTE ADDED.	22/11/2024	03006751

WIPRO PARI GROUP

www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

DESCRIPTION: MASTER 2
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
14.13 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	---	PART CLASS. T+S	HEAT TREATMENT	REF NOTE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006751	03004785	03002882	#	P23Y5B076191	02	2 : 1
17/04/2025	17/04/2025	17/04/2025	NET WEIGHT-Kg 0.14 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E-DM Uploading\2022-23\P23Y5\P23Y5B076191.dft