


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

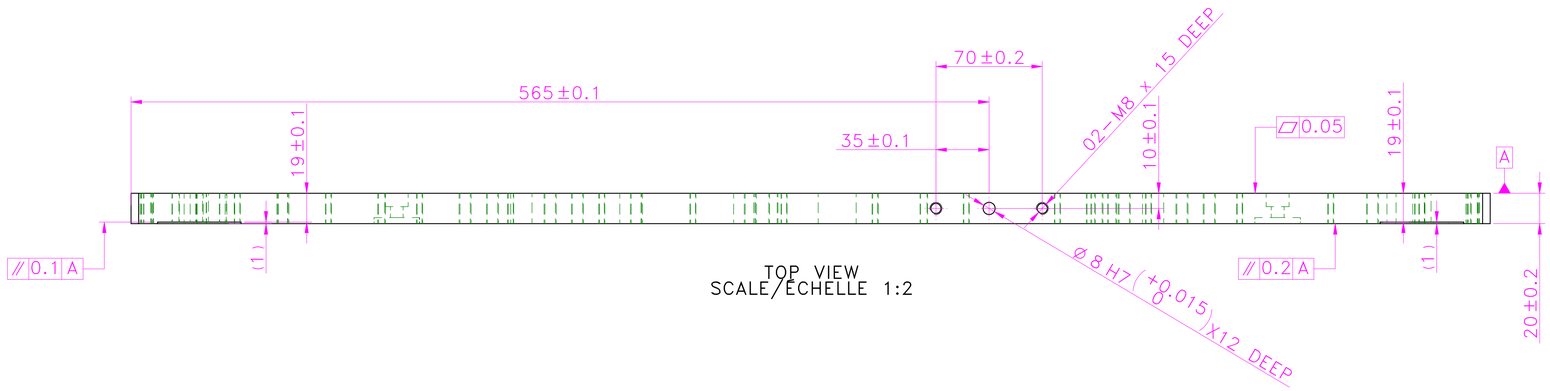


TOP VIEW
SCALE/ECHELLE 1:2

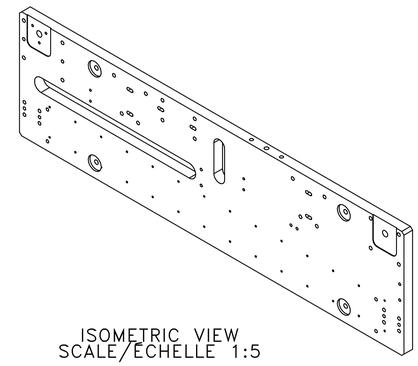


ISOMETRIC VIEW
SCALE/ECHELLE 1:5

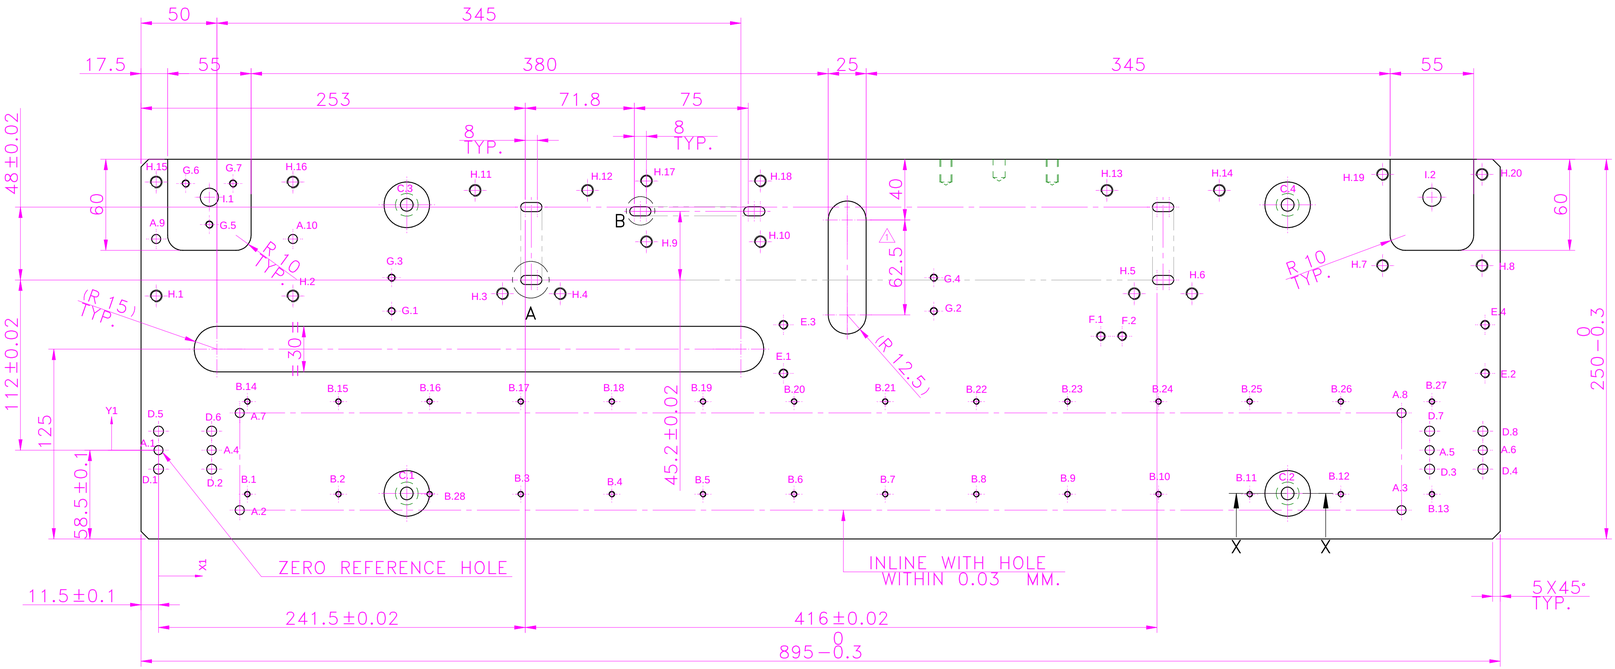


FRONT VIEW
SCALE/ECHELLE 1:2



DETAIL A
SCALE/ECHELLE 2:1



DETAIL B
SCALE/ECHELLE 2:1

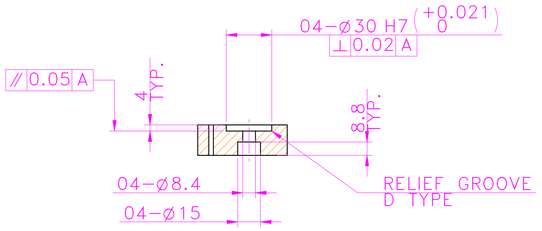

SECTION X-X
SCALE/ECHELLE 1:2

NOTE :-
USE HELICIL FOR TAPPING HOLES.

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: HE-30
FINISH: SELF-ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 11.56 kg

NOTE :-(French)
MATÉRIEL : HE-30
FINITION : SELF-ANODIZING
MACHINES : 3.2
POIDS (Kg): 11.56 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
1	CUTOUT INCREASED	14/02/2025	03006810

WIPRO PARI GROUP

www.wipropari.com

DESCRIPTION: BASE PLATE - SHIM VERIFICATION ASSEMBLY

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
801.25 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. — PART CLASS. B — HEAT TREATMENT —

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006330	03004785	03002882	#	P23Y5B076204	01	1 : 2
14/02/2025	14/02/2025	14/02/2025	NET WEIGHT-Kg 11.56 kg			SHEET 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

\\srv01043\E:\dtw Uploading\2022-23\P23Y5\P23Y5B076204.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm THRU'	H7 HOLE
A.2	53.50	−39.50	Ø 6.00 mm THRU'	H7 HOLE
A.3	818.50	−39.50	Ø 6.00 mm THRU'	H7 HOLE
A.4	35.00	0.00	Ø 6.00 mm THRU'	H7 HOLE
A.5	837.00	0.00	Ø 6.00 mm THRU'	H7 HOLE
A.6	872.00	0.00	Ø 6.00 mm THRU'	H7 HOLE
A.7	53.50	24.50	Ø 6.00 mm THRU'	H7 HOLE
A.8	818.50	24.50	Ø 6.00 mm THRU'	H7 HOLE
A.9	−1.50	139.00	Ø 6.00 mm THRU'	H7 HOLE
A.10	88.50	139.00	Ø 6.00 mm THRU'	H7 HOLE
B.1	58.50	−29.00	M4 THRU'	
B.2	118.50	−29.00	M4 THRU'	
B.3	238.50	−29.00	M4 THRU'	
B.4	298.50	−29.00	M4 THRU'	
B.5	358.50	−29.00	M4 THRU'	
B.6	418.50	−29.00	M4 THRU'	
B.7	478.50	−29.00	M4 THRU'	
B.8	538.50	−29.00	M4 THRU'	
B.9	598.50	−29.00	M4 THRU'	
B.10	658.50	−29.00	M4 THRU'	
B.11	718.50	−29.00	M4 THRU'	
B.12	778.50	−29.00	M4 THRU'	
B.13	838.50	−29.00	M4 THRU'	
B.14	58.50	32.00	M4 THRU'	
B.15	118.50	32.00	M4 THRU'	
B.16	178.50	32.00	M4 THRU'	
B.17	238.50	32.00	M4 THRU'	
B.18	298.50	32.00	M4 THRU'	
B.19	358.50	32.00	M4 THRU'	
B.20	418.50	32.00	M4 THRU'	
B.21	478.50	32.00	M4 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
B.22	538.50	32.00	M4 THRU'	
B.23	598.50	32.00	M4 THRU'	
B.24	658.50	32.00	M4 THRU'	
B.25	718.50	32.00	M4 THRU'	
B.26	778.50	32.00	M4 THRU'	
B.27	838.50	32.00	M4 THRU'	
B.28	178.50	−29.00	M4 THRU'	
C.1	163.50	−28.50	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm − 8.80 mm DEEP	FROM BOTTOM SIDE REF. SECT. X−X
C.2	743.50	−28.50	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm − 8.80 mm DEEP	FROM BOTTOM SIDE REF. SECT. X−X
C.3	163.50	161.50	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm − 8.80 mm DEEP	FROM BOTTOM SIDE REF. SECT. X−X
C.4	743.50	161.50	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm − 8.80 mm DEEP	FROM BOTTOM SIDE REF. SECT. X−X
D.1	0.00	−12.50	Ø 6.60 mm THRU'	
D.2	35.00	−12.50	Ø 6.60 mm THRU'	
D.3	837.00	−12.50	Ø 6.60 mm THRU'	
D.4	872.00	−12.50	Ø 6.60 mm THRU'	
D.5	0.00	12.50	Ø 6.60 mm THRU'	
D.6	35.00	12.50	Ø 6.60 mm THRU'	
D.7	837.00	12.50	Ø 6.60 mm THRU'	
D.8	872.00	12.50	Ø 6.60 mm THRU'	
E.1	411.50	50.50	M6 THRU'	
E.2	873.50	50.50	M6 THRU'	
E.3	411.50	82.50	M6 THRU'	
E.4	873.50	82.50	M6 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
F.1	620.50	75.00	M6 THRU'	
F.2	634.50	75.00	M6 THRU'	
G.1	153.50	91.50	M5 THRU'	
G.2	510.50	91.50	M5 THRU'	
G.3	153.50	113.50	M5 THRU'	
G.4	510.50	113.50	M5 THRU'	
G.5	33.50	148.50	M5 THRU'	
G.6	17.91	175.50	M5 THRU'	
G.7	49.09	175.50	M5 THRU'	
H.1	−1.50	101.50	M8 THRU'	
H.2	88.50	101.50	M8 THRU'	
H.3	226.50	103.00	M8 THRU'	
H.4	264.50	103.00	M8 THRU'	
H.5	642.50	103.00	M8 THRU'	
H.6	680.50	103.00	M8 THRU'	
H.7	806.00	121.50	M8 THRU'	
H.8	871.50	121.50	M8 THRU'	
H.9	321.30	137.20	M8 THRU'	
H.10	396.30	137.20	M8 THRU'	
H.11	208.50	171.00	M8 THRU'	
H.12	282.50	171.00	M8 THRU'	
H.13	624.50	171.00	M8 THRU'	
H.14	698.50	171.00	M8 THRU'	
H.15	−1.50	176.50	M8 THRU'	
H.16	88.50	176.50	M8 THRU'	
H.17	321.30	177.20	M8 THRU'	
H.18	396.30	177.20	M8 THRU'	
H.19	806.00	181.50	M8 THRU'	
H.20	871.50	181.50	M8 THRU'	
I.1	33.50	166.50	Ø 12.00 mm THRU'	H7 HOLE
I.2	838.50	166.50	Ø 12.00 mm THRU'	H7 HOLE

TOLERANCE NOTE :−
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02./IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
MATERIAL: HE−30
FINISH: SELF−ANODIZING
MACHINING: 3.2/
WEIGHT(Kg): 11.56 kg

NOTE :−(French)
MATERIEL : HE−30
FINITION : SELF−ANODIZING
MACHINES : 3.2/
POIDS (Kg): 11.56 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR CODE

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP RADII 0.5 R	UNSP CHF 0.5 X 45°
UNSPECIFIED TOL (FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL (FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL (M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL (M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
1	CUTOUT INCREASED	14/02/2025	03006810

WIPRO PARI GROUP
www.wipropari.com
DESCRIPTION: BASE PLATE - SHIM VERIFICATION ASSEMBLY
DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
801.25 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT —

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006330	03004785	03002882	#	P23Y5B076204	01	1 : 2
14/02/2025	14/02/2025	14/02/2025	NET WEIGHT-Kg 11.56 kg			SHEET 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srvd1043\E:\DM Uploading\2022-23\P23Y5\P23Y5B076204.dft