


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

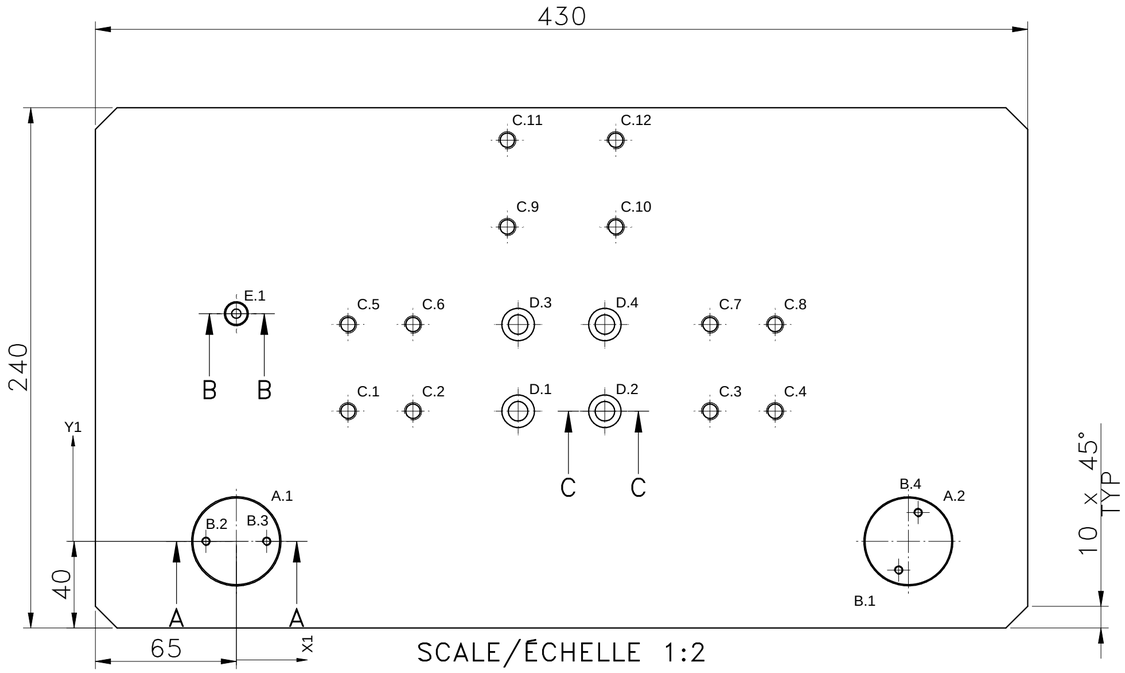


SCALE/ÉCHELLE 1:2

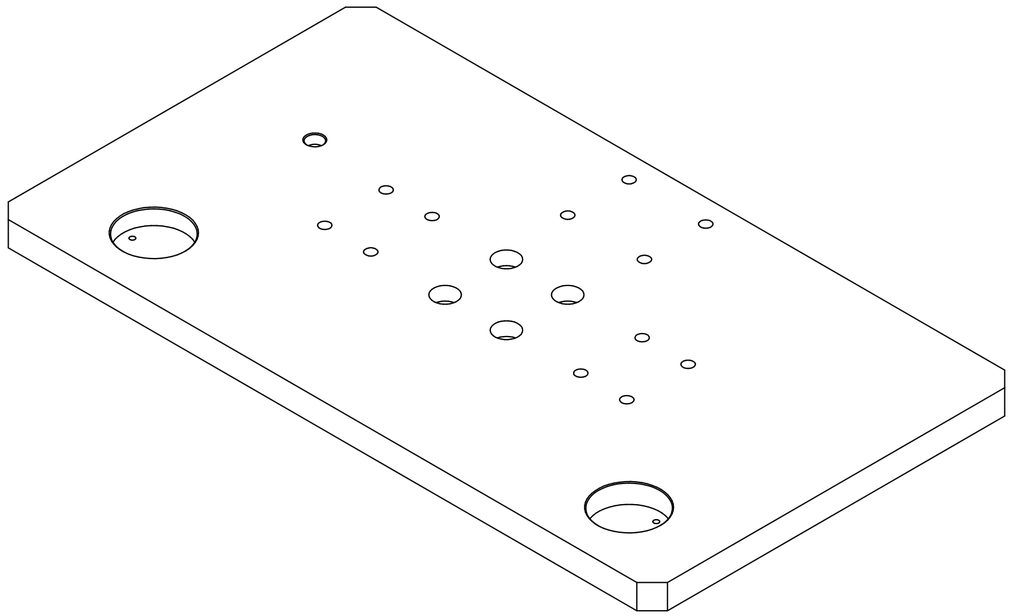


SCALE/ÉCHELLE 1:2

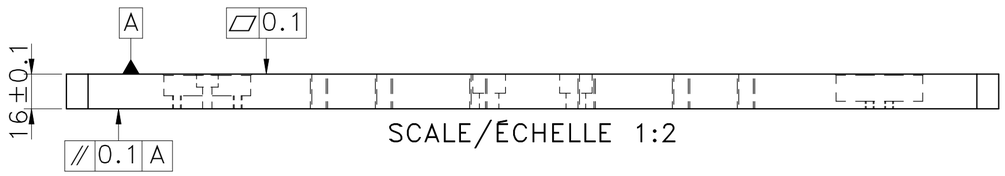


SCALE/ÉCHELLE 1:2

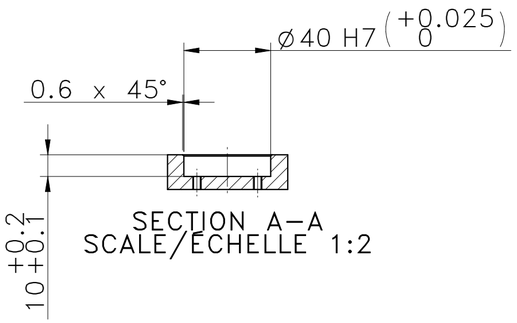

SECTION A–A
SCALE/ÉCHELLE 1:2



SECTION C–C
SCALE/ÉCHELLE 1:2

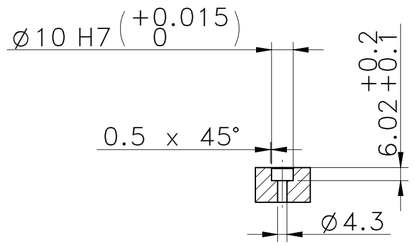

SECTION B–B
SCALE/ÉCHELLE 1:2

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 12.57 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 12.57 kg

RESERVED SPACE
CONTROLLED COPY
STAMP

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **BOTTOM MOUNTING PLATE**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
364.82 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. N.A. | PART CLASS. B | HEAT TREATMENT N.A.

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006810	03004785	03002882	#	P23Y5B079009	00	1 : 2
27/06/2024	27/06/2024	27/06/2024	NET WEIGHT-Kg 12.57 kg			SHEET 1 OF 2

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B079009.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 40.00 mm x 10.00 mm DEEP	REFER SEC A–A
A.2	310.00	0.00	Ø 40.00 mm x 12.50 mm DEEP	REFER SEC A–A
B.1	305.51	–13.26	M4 THRU'	
B.2	–14.00	0.00	M4 THRU'	
B.3	14.00	0.00	M4 THRU'	
B.4	314.49	13.26	M4 THRU'	
C.1	51.50	60.00	M8 THRU'	
C.2	81.50	60.00	M8 THRU'	
C.3	218.50	60.00	M8 THRU'	
C.4	248.50	60.00	M8 THRU'	
C.5	51.50	100.00	M8 THRU'	
C.6	81.50	100.00	M8 THRU'	
C.7	218.50	100.00	M8 THRU'	
C.8	248.50	100.00	M8 THRU'	
C.9	125.00	145.00	M8 x 20.00 mm DEEP	
C.10	175.00	145.00	M8 x 20.00 mm DEEP	
C.11	125.00	185.00	M8 x 20.00 mm DEEP	
C.12	175.00	185.00	M8 x 20.00 mm DEEP	
D.1	130.00	60.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REFER SEC C–C
D.2	170.00	60.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REFER SEC C–C
D.3	130.00	100.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REFER SEC C–C
D.4	170.00	100.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REFER SEC C–C
E.1	0.00	105.00	Ø 4.30 mm THRU'	REFER SEC B–B

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 12.57 kg

NOTE :–(French)
MATERIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 12.57 kg

RESERVED SPACE FOR CONTROLLED COPY STAMP

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **BOTTOM MOUNTING PLATE**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
364.82 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG.	N.A.	PART CLASS.	B	HEAT TREATMENT	N.A.

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006810	03004785	03002882	#
27/06/2024	27/06/2024	27/06/2024	NET WEIGHT-Kg 12.57 kg

DRG./PART CODE: **P23Y5B079009**

REV.: **00**

SCALE: 1 : 2

SHEET: 2 OF 2

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B079009.dft