


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

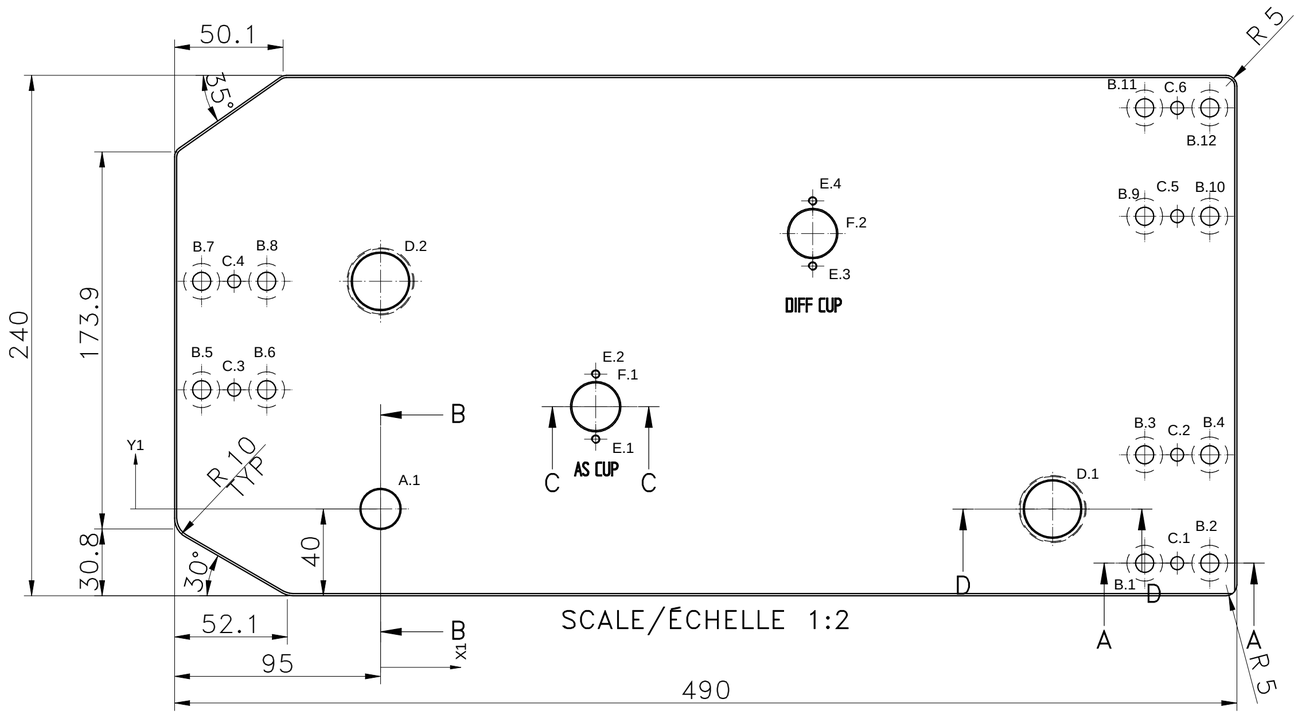


SCALE/ÉCHELLE 1:2

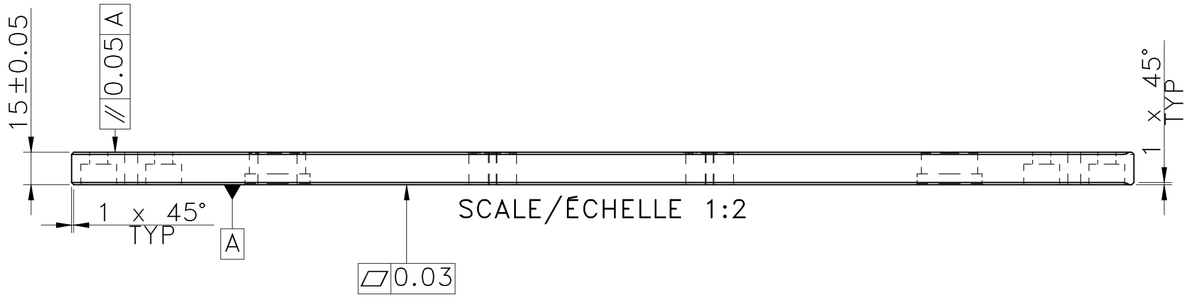


SCALE/ÉCHELLE 1:2

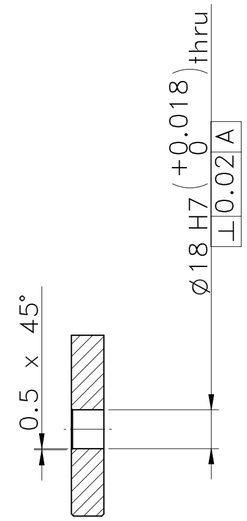


SECTION B–B
SCALE/ÉCHELLE 1:2



SECTION C–C
SCALE/ÉCHELLE 1:2

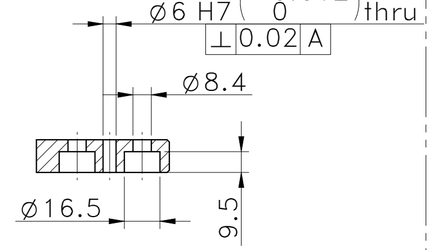

SECTION A–A
SCALE/ÉCHELLE 1:2

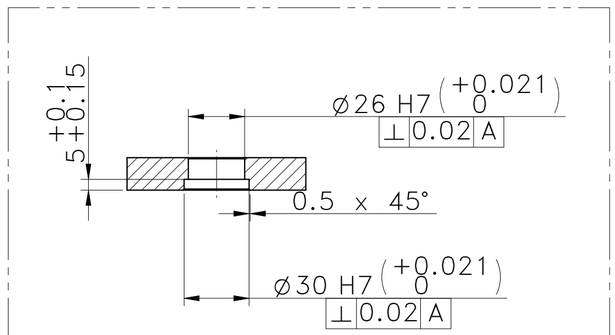

SECTION D–D
SCALE/ÉCHELLE 1:2

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 13.11 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 13.11 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE
© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION						DRAWING TYPE
ML PLATE 1						MACHINING
SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
404.63 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG.	N.A.	PART CLASS. B	HEAT TREATMENT	N.A.

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006810	03004785	03002882	#	P23Y5B079013	00	1 : 1
27/06/2024	27/06/2024	27/06/2024	NET WEIGHT-Kg 13.11 kg			SHEET 1 OF 2


\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B079013.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 18.00 mm THRU'	REFER SEC B–B
B.1	352.50	–25.00	Ø 8.40 mm THRU' C'BORE Ø 16.50 mm – 9.50 mm DEEP	REFER SEC A–A
B.2	382.50	–25.00	Ø 8.40 mm THRU' C'BORE Ø 16.50 mm – 9.50 mm DEEP	REFER SEC A–A
B.3	352.50	25.00	Ø 8.40 mm THRU' C'BORE Ø 16.50 mm – 9.50 mm DEEP	REFER SEC A–A
B.4	382.50	25.00	Ø 8.40 mm THRU' C'BORE Ø 16.50 mm – 9.50 mm DEEP	REFER SEC A–A
B.5	–82.50	55.00	Ø 8.40 mm THRU' C'BORE Ø 16.50 mm – 9.50 mm DEEP	REFER SEC A–A
B.6	–52.50	55.00	Ø 8.40 mm THRU' C'BORE Ø 16.50 mm – 9.50 mm DEEP	REFER SEC A–A
B.7	–82.50	105.00	Ø 8.40 mm THRU' C'BORE Ø 16.50 mm – 9.50 mm DEEP	REFER SEC A–A
B.8	–52.50	105.00	Ø 8.40 mm THRU' C'BORE Ø 16.50 mm – 9.50 mm DEEP	REFER SEC A–A
B.9	352.50	135.00	Ø 8.40 mm THRU' C'BORE Ø 16.50 mm – 9.50 mm DEEP	REFER SEC A–A
B.10	382.50	135.00	Ø 8.40 mm THRU' C'BORE Ø 16.50 mm – 9.50 mm DEEP	REFER SEC A–A
B.11	352.50	185.00	Ø 8.40 mm THRU' C'BORE Ø 16.50 mm – 9.50 mm DEEP	REFER SEC A–A
B.12	382.50	185.00	Ø 8.40 mm THRU' C'BORE Ø 16.50 mm – 9.50 mm DEEP	REFER SEC A–A

HOLE TABLE				
Hole	X	Y	Size	REMARK
C.1	367.50	–25.00	Ø 6.00 mm THRU'	REFER SEC A–A
C.2	367.50	25.00	Ø 6.00 mm THRU'	REFER SEC A–A
C.3	–67.50	55.00	Ø 6.00 mm THRU'	REFER SEC A–A
C.4	–67.50	105.00	Ø 6.00 mm THRU'	REFER SEC A–A
C.5	367.50	135.00	Ø 6.00 mm THRU'	REFER SEC A–A
C.6	367.50	185.00	Ø 6.00 mm THRU'	REFER SEC A–A
D.1	310.00	0.00	Ø 26.00 mm THRU'	REFER SEC D–D
D.2	0.00	105.00	Ø 26.00 mm THRU'	REFER SEC D–D
E.1	99.24	32.20	M4 THRU'	
E.2	99.24	62.20	M4 THRU'	
E.3	199.31	112.06	M4 THRU'	
E.4	199.31	142.06	M4 THRU'	
F.1	99.24	47.20	Ø 22.00 mm THRU'	REFER SEC C–C
F.2	199.31	127.06	Ø 22.00 mm THRU'	REFER SEC C–C

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

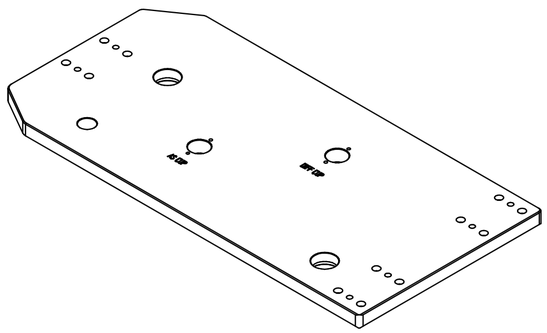

SCALE/ÉCHELLE 1:4

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 13.11 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 13.11 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: ML PLATE 1

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
404.63 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. N.A. | PART CLASS. B | HEAT TREATMENT N.A.

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006810	03004785	03002882	#	P23Y5B079013	00	1 : 1
27/06/2024	27/06/2024	27/06/2024	NET WEIGHT-Kg 13.11 kg			SHEET 2 OF 2

\\srv01043\ExDM Uploading\2022-23\P2315\P23Y5B079013.dft