


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

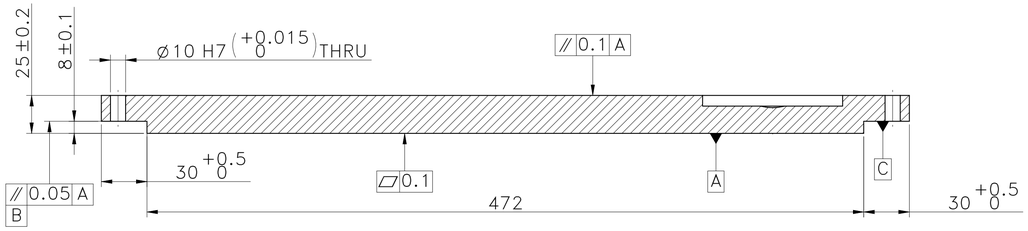

SECTION B–B
SCALE/ÉCHELLE 1:2

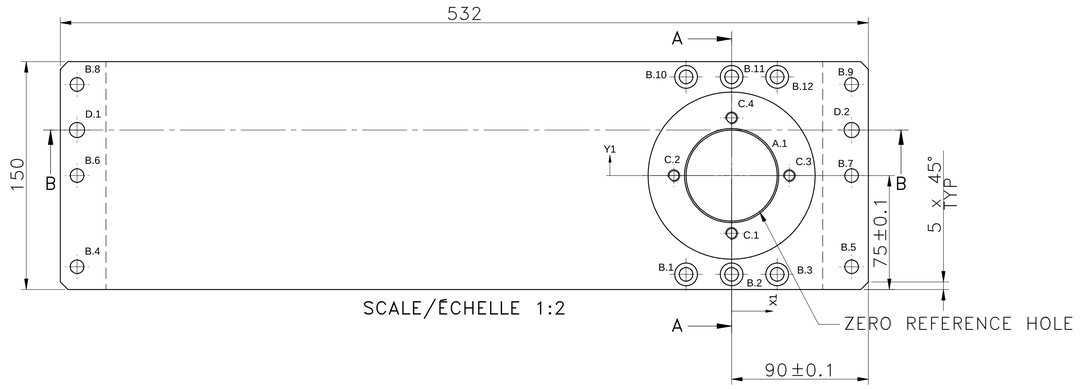

SCALE/ÉCHELLE 1:2

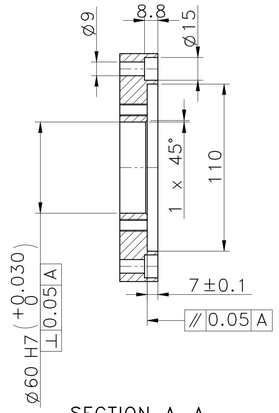

SECTION A–A
SCALE/ÉCHELLE 1:2


HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 60.00 mm THRU' C'BORE Ø 110.00 mm – 7.00 mm DEEP	REF SEC A–A
B.1	–30.00	–65.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC A–A
B.2	0.00	–65.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC A–A
B.3	30.00	–65.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC A–A
B.4	–431.00	–60.00	Ø 9.00 mm THRU'	
B.5	79.00	–60.00	Ø 9.00 mm THRU'	
B.6	–431.00	0.00	Ø 9.00 mm THRU'	
B.7	79.00	0.00	Ø 9.00 mm THRU'	
B.8	–431.00	60.00	Ø 9.00 mm THRU'	
B.9	79.00	60.00	Ø 9.00 mm THRU'	
B.10	–30.00	65.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC A–A
B.11	0.00	65.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC A–A
B.12	30.00	65.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC A–A
C.1	0.00	–38.00	M8 THRU'	
C.2	–38.00	0.00	M8 THRU'	
C.3	38.00	0.00	M8 THRU'	
C.4	0.00	38.00	M8 THRU'	
D.1	–431.00	30.00	Ø 10.00 mm THRU'	REF SEC B–B
D.2	79.00	30.00	Ø 10.00 mm THRU'	REF SEC B–B

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE :–
CO PLANERITY OF SURFACE B, C SHOULD BE WITHIN 0.05

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

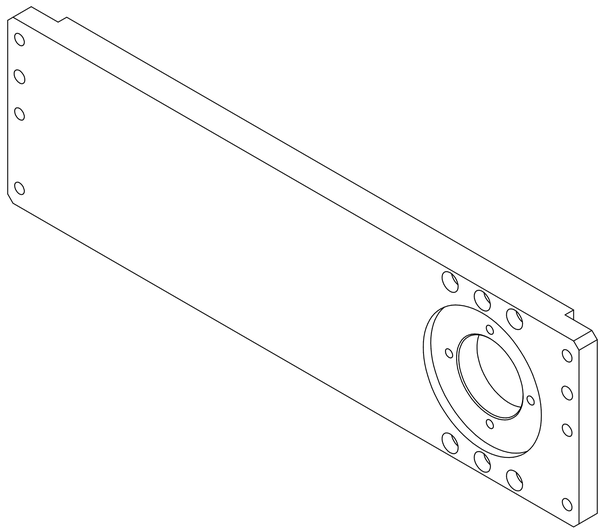

SCALE/ÉCHELLE 1:2

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 13.92 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES 3.2
POIDS (Kg): 13.92 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
	LIMITS
	Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
4.LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: CENTRALIZER ASSEMBLY MTG
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
311.65 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. N.A. | PART CLASS. B | HEAT TREATMENT N.A.

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006810	03004785	03002882	#	P23Y5B091011	00	1 : 2
08/05/2024	08/05/2024	08/05/2024	NET WEIGHT-Kg 13.92 kg			SHEET 1 OF 1

\\srv0102\E:\DW Uploading\2022-23\P23Y5\P23Y5B091011.dft