

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00




SECTION D–D
SCALE/ECHELLE 1:2




SECTION K–K
SCALE/ECHELLE 1:2




SECTION L–L
SCALE/ECHELLE 1:2




SECTION H–H
SCALE/ECHELLE 1:1




SECTION I–I
SCALE/ECHELLE 1:2




SECTION F–F
SCALE/ECHELLE 1:2




SECTION J–J
SCALE/ECHELLE 1:2

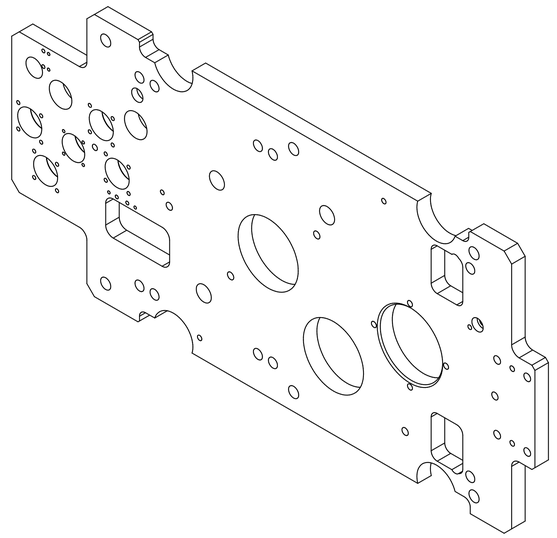


SCALE/ECHELLE 1:2.86

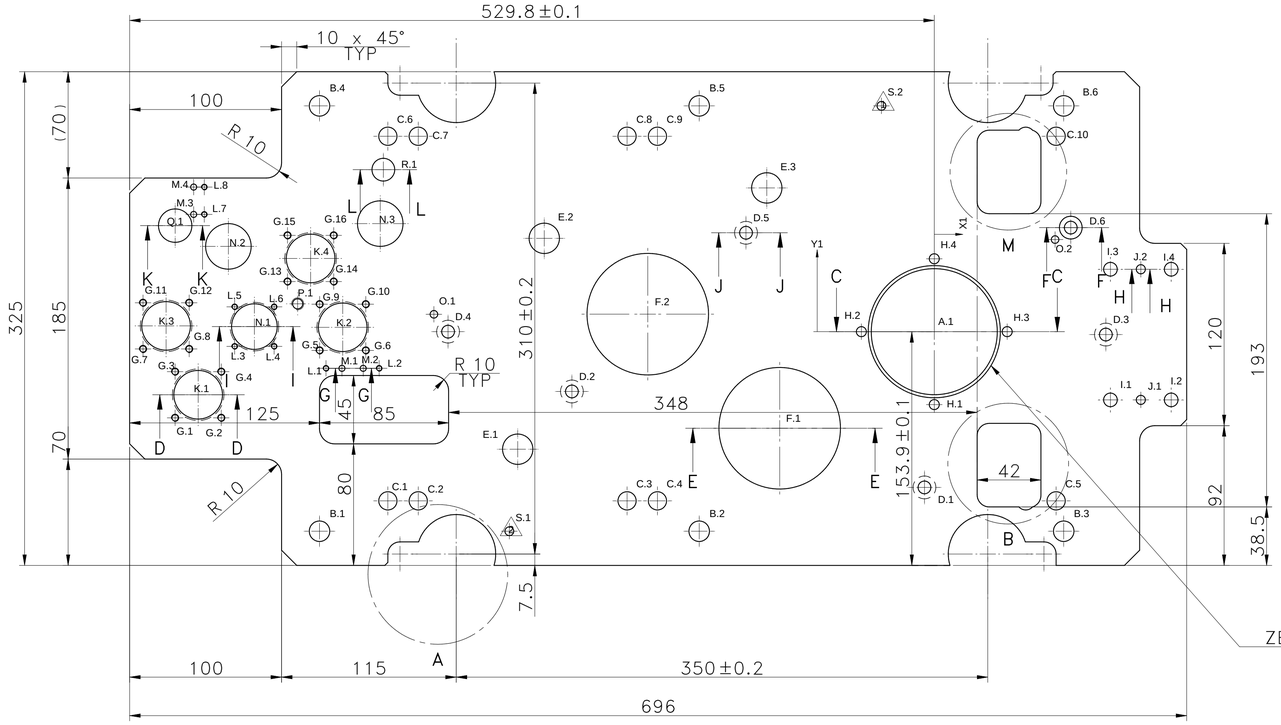


SCALE/ECHELLE 1:2

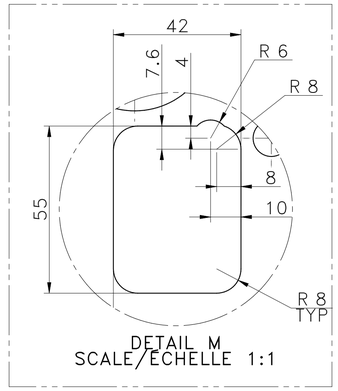

DETAIL M
SCALE/ECHELLE 1:1

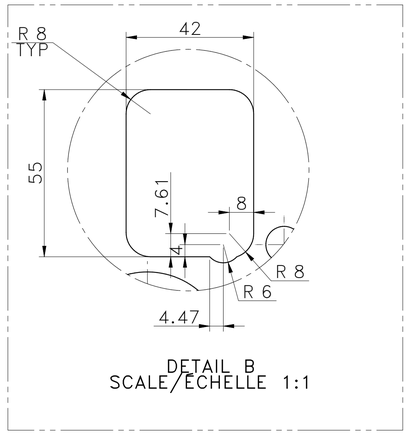


DETAIL B
SCALE/ECHELLE 1:1

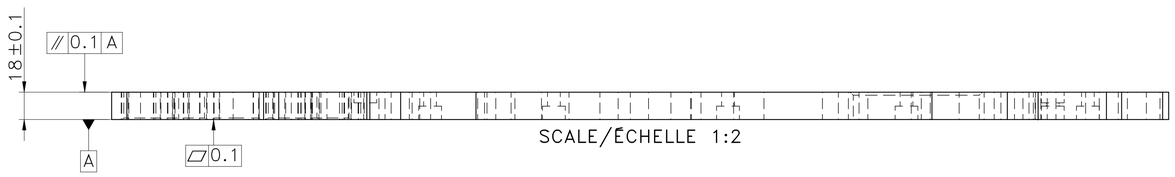


SCALE/ECHELLE 1:2


NOTE:
1)USE INSERT AT ALL TAPPING HOLES




SECTION C–C
SCALE/ECHELLE 1:2



SECTION G–G
SCALE/ECHELLE 1:1



SECTION E–E
SCALE/ECHELLE 1:2

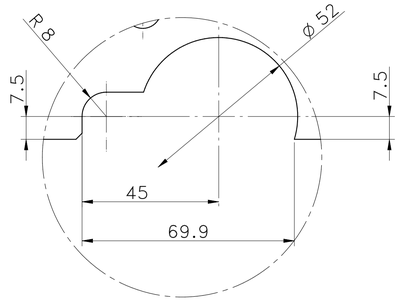

DETAIL A
SCALE/ECHELLE 1:1

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: Aluminum, 7075-T6
FINISH: SELF-ANODIZING
MACHINING:
WEIGHT(Kg): 8.28 kg

NOTE :-(French)
MATÉRIEL : Aluminum, 7075-T6
FINITION : SELF-ANODIZING
MACHINES :
POIDS (Kg): 8.28 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

DESCRIPTION: FIXTURE PLATE
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
678.53 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. N.A. | PART CLASS. B | HEAT TREATMENT

LOCATION : PUNE	DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
	03006810	03005766	03002882	#	P23Y5B091031	00	1 : 2
	14/05/2024	14/05/2024	14/05/2024	NET WEIGHT-Kg 8.28 kg			SHEET 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01102\Ex-DM Uploading\2022--23\P23Y5\P23Y5B091031.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00		REFER SEC C–C
B.1	−404.78	−131.36	Ø 13.50 mm THRU'	
B.2	−154.78	−131.36	Ø 13.50 mm THRU'	
B.3	85.22	−131.36	Ø 13.50 mm THRU'	
B.4	−404.78	148.64	Ø 13.50 mm THRU'	
B.5	−154.78	148.64	Ø 13.50 mm THRU'	
B.6	85.22	148.64	Ø 13.50 mm THRU'	
C.1	−359.78	−111.36	Ø 12.00 mm THRU'	
C.2	−339.78	−111.36	Ø 12.00 mm THRU'	
C.3	−202.28	−111.36	Ø 12.00 mm THRU'	
C.4	−182.28	−111.36	Ø 12.00 mm THRU'	
C.5	80.22	−111.36	Ø 12.00 mm THRU'	
C.6	−359.78	128.64	Ø 12.00 mm THRU'	
C.7	−339.78	128.64	Ø 12.00 mm THRU'	
C.8	−202.28	128.64	Ø 12.00 mm THRU'	
C.9	−182.28	128.64	Ø 12.00 mm THRU'	
C.10	80.22	128.64	Ø 12.00 mm THRU'	
D.1	−6.44	−102.51	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REFER SEC J–J
D.2	−238.61	−39.35	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REFER SEC J–J
D.3	112.98	−1.89	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REFER SEC J–J
D.4	−320.15	0.03	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REFER SEC J–J
D.5	−123.97	65.11	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REFER SEC J–J
D.6	89.87	68.50	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REFER SEC J–J
E.1	−274.28	−77.36	Ø 20.00 mm THRU'	
E.2	−256.78	61.44	Ø 20.00 mm THRU'	
E.3	−110.28	94.64	Ø 20.00 mm THRU'	
F.1	−101.78	−63.56		REFER SEC E–E
F.2	−188.65	11.53		REFER SEC E–E
G.1	−499.89	−56.71	M5 THRU'	
G.2	−469.48	−56.71	M5 THRU'	
G.3	−499.89	−26.30	M5 THRU'	
G.4	−469.48	−26.30	M5 THRU'	
G.5	−404.72	−12.33	M5 THRU'	
G.6	−374.32	−12.33	M5 THRU'	
G.7	−521.02	−11.39	M5 THRU'	
G.8	−490.61	−11.39	M5 THRU'	
G.9	−404.72	18.07	M5 THRU'	
G.10	−374.32	18.07	M5 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
G.11	−521.02	19.01	M5 THRU'	
G.12	−490.61	19.01	M5 THRU'	
G.13	−425.85	32.98	M5 THRU'	
G.14	−395.45	32.98	M5 THRU'	
G.15	−425.85	63.39	M5 THRU'	
G.16	−395.45	63.39	M5 THRU'	
H.1	0.00	−48.00	Ø 6.60 mm THRU'	
H.2	−48.00	0.00	Ø 6.60 mm THRU'	
H.3	48.00	0.00	Ø 6.60 mm THRU'	
H.4	0.00	48.00	Ø 6.60 mm THRU'	
I.1	116.00	−44.90	Ø 9.00 mm THRU'	
I.2	156.00	−44.90	Ø 9.00 mm THRU'	
I.3	116.00	41.10	Ø 9.00 mm THRU'	
I.4	156.00	41.10	Ø 9.00 mm THRU'	
J.1	136.00	−44.90	Ø 6.00 mm THRU'	REFER SEC H–H
J.2	136.00	41.10	Ø 6.00 mm THRU'	REFER SEC H–H
K.1	−484.68	−41.50		REFER SEC D–D
K.2	−389.52	2.87		REFER SEC D–D
K.3	−505.81	3.81		REFER SEC D–D
K.4	−410.65	48.19		REFER SEC D–D
L.1	−400.52	−24.13	M4 THRU'	
L.2	−365.52	−24.13	M4 THRU'	
L.3	−460.67	−9.66	M4 THRU'	
L.4	−434.67	−9.66	M4 THRU'	
L.5	−460.67	16.34	M4 THRU'	
L.6	−434.67	16.34	M4 THRU'	
L.7	−480.65	77.19	M4 THRU'	
L.8	−480.65	95.19	M4 THRU'	
M.1	−390.02	−24.13	Ø 4.00 mm THRU'	REFER SEC G–G
M.2	−376.02	−24.13	Ø 4.00 mm THRU'	REFER SEC G–G
M.3	−487.65	77.19	Ø 4.00 mm THRU'	REFER SEC G–G
M.4	−487.65	95.19	Ø 4.00 mm THRU'	REFER SEC G–G
N.1	−447.67	3.34		REFER SEC I–I
N.2	−464.78	56.14		REFER SEC I–I
N.3	−364.78	71.14		REFER SEC I–I
O.1	−329.46	11.43	Ø 5.00 mm THRU'	H7
O.2	79.53	60.62	Ø 5.00 mm THRU'	H7
P.1	−419.17	18.34	M8 THRU'	
Q.1	−499.81	69.81		REFER SEC K–K
R.1	−362.75	106.64		REFER SEC L–L
S.1	−279.78	−131.36	Ø 5.80 mm THRU'	
S.2	−34.78	148.64	Ø 5.80 mm THRU'	

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D,
DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.1

NOTE : (English)
MATERIAL: Aluminum, 7075–T6
FINISH: SELF–ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 8.28 kg

NOTE :–(French)
MATÉRIEL : Aluminum, 7075–T6
FINITION : SELF–ANODIZING
MACHINES : 3.2
POIDS (Kg): 8.28 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR CONTROLLER COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

DRAWING TYPE: MACHINING

DESCRIPTION: FIXTURE PLATE

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING
3.IF IN DOUBT , ASK TEAM MEMBER

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
678.53 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. N.A. | PART CLASS. B | HEAT TREATMENT

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006810	03005766	03002882	#	P23Y5B091031	00	1 : 2
14/05/2024	14/05/2024	14/05/2024	NET WEIGHT-Kg 8.28 kg			SHEET 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01102\E-eDM Uploading\2022-23\P23Y5\P23Y5B091031.dft