


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

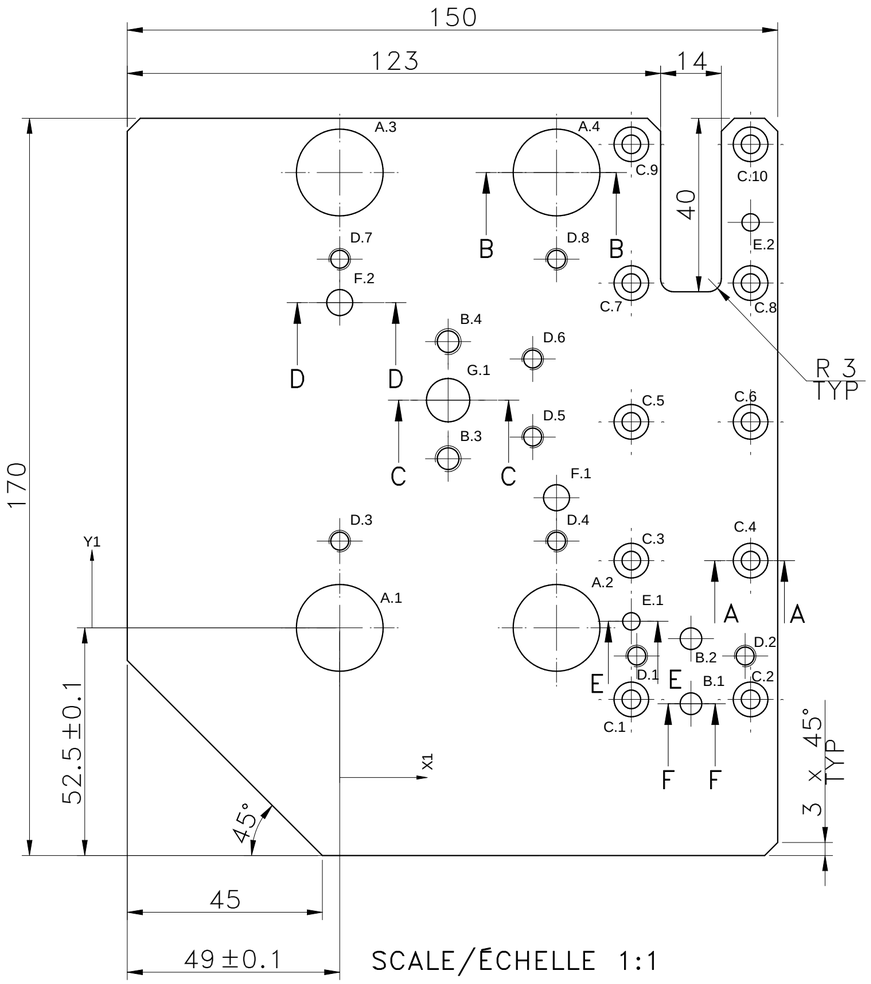


SCALE/ÉCHELLE 1:1

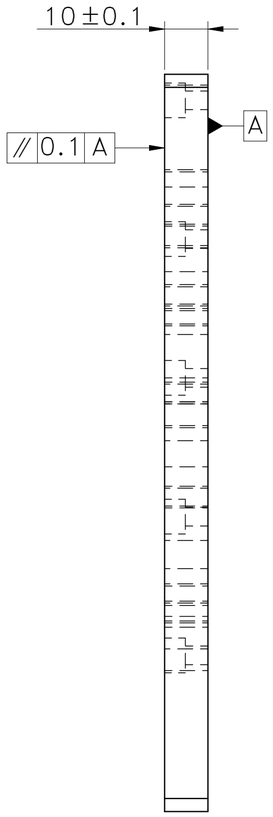


SCALE/ÉCHELLE 1:1

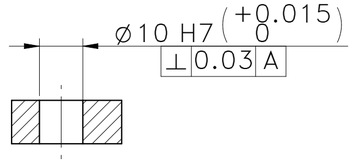


SECTION C–C
SCALE/ÉCHELLE 1:1




SECTION A–A
SCALE/ÉCHELLE 1:1




SECTION B–B
SCALE/ÉCHELLE 1:1




SECTION F–F
SCALE/ÉCHELLE 1:1

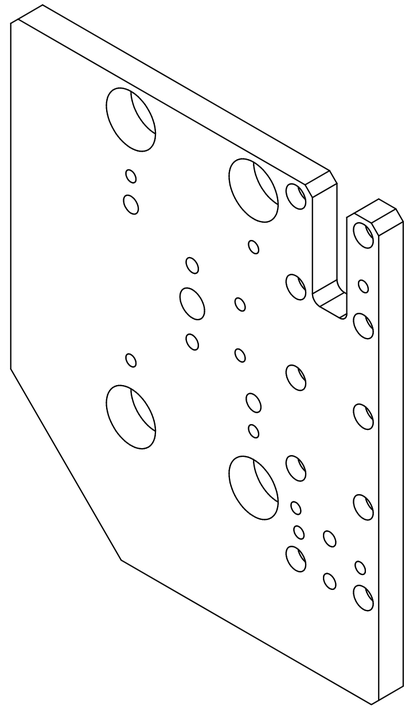

SCALE/ÉCHELLE 1:1.25

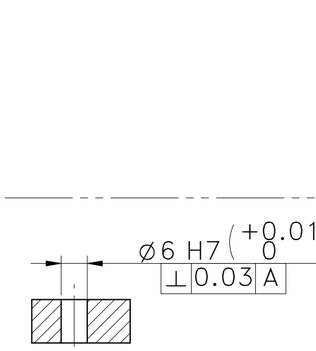

SECTION D–D
SCALE/ÉCHELLE 1:1

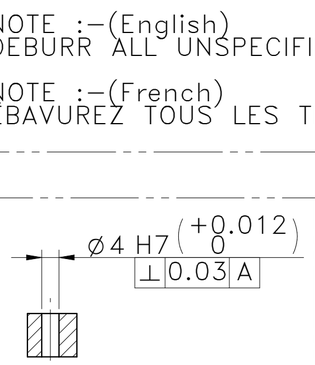

SECTION E–E
SCALE/ÉCHELLE 1:1

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: M.S
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 1.72 kg

NOTE :–(French)
MATÉRIEL : M.S
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 1.72 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **GRIPPING ASSEMBLY PLATE**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
90.17 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. N.A. | PART CLASS. B | HEAT TREATMENT N.A.

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006810	03005766	03002882	#	P23Y5B091050	00	1 : 2
14/05/2024	14/05/2024	14/05/2024	NET WEIGHT-Kg 1.72 kg			SHEET 1 OF 2

\\srv01102\ExDM Uploading\2022-23\P23Y5\P23Y5B091050.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE

Hole	X	Y	Size	REMARK
A.1	0.00	0.00		REFER SEC B–B
A.2	50.00	0.00		REFER SEC B–B
A.3	0.00	105.00		REFER SEC B–B
A.4	50.00	105.00		REFER SEC B–B
B.1	81.00	–17.50	Ø 5.00 mm THRU'	REFER SEC F–F
B.2	81.00	–2.50	Ø 5.00 mm THRU'	REFER SEC F–F
B.3	25.00	39.00	M6 THRU'	
B.4	25.00	66.00	M6 THRU'	
C.1	67.25	–16.50	Ø 4.30 mm x 20.00 mm DEEP C'BORE Ø 8.00 mm – 4.80 mm DEEP	REFER SEC A–A
C.2	94.75	–16.50	Ø 4.30 mm x 20.00 mm DEEP C'BORE Ø 8.00 mm – 4.80 mm DEEP	REFER SEC A–A
C.3	67.25	15.50	Ø 4.30 mm x 20.00 mm DEEP C'BORE Ø 8.00 mm – 4.80 mm DEEP	REFER SEC A–A
C.4	94.75	15.50	Ø 4.30 mm x 20.00 mm DEEP C'BORE Ø 8.00 mm – 4.80 mm DEEP	REFER SEC A–A
C.5	67.25	47.50	Ø 4.30 mm x 20.00 mm DEEP C'BORE Ø 8.00 mm – 4.80 mm DEEP	REFER SEC A–A
C.6	94.75	47.50	Ø 4.30 mm x 20.00 mm DEEP C'BORE Ø 8.00 mm – 4.80 mm DEEP	REFER SEC A–A

HOLE TABLE

Hole	X	Y	Size	REMARK
C.7	67.25	79.50	Ø 4.30 mm x 20.00 mm DEEP C'BORE Ø 8.00 mm – 4.80 mm DEEP	REFER SEC A–A
C.8	94.75	79.50	Ø 4.30 mm x 20.00 mm DEEP C'BORE Ø 8.00 mm – 4.80 mm DEEP	REFER SEC A–A
C.9	67.25	111.50	Ø 4.30 mm x 20.00 mm DEEP C'BORE Ø 8.00 mm – 4.80 mm DEEP	REFER SEC A–A
C.10	94.75	111.50	Ø 4.30 mm x 20.00 mm DEEP C'BORE Ø 8.00 mm – 4.80 mm DEEP	REFER SEC A–A
D.1	68.50	–6.50	M5 THRU'	
D.2	93.50	–6.50	M5 THRU'	
D.3	0.00	20.00	M5 THRU'	
D.4	50.00	20.00	M5 THRU'	
D.5	44.50	44.00	M5 THRU'	
D.6	44.50	62.00	M5 THRU'	
D.7	0.00	85.00	M5 THRU'	
D.8	50.00	85.00	M5 THRU'	
E.1	67.25	1.50	Ø 4.00 mm THRU'	REFER SEC E–E
E.2	94.75	93.50	Ø 4.00 mm THRU'	REFER SEC E–E
F.1	50.00	30.00	Ø 6.00 mm THRU'	REF SEC D–D
F.2	0.00	75.00	Ø 6.00 mm THRU'	REF SEC D–D
G.1	25.00	52.50	Ø 10.00 mm THRU'	REFER SEC C–C

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/– 0.1

NOTE : (English)
MATERIAL: M.S
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 1.72 kg

NOTE :–(French)
MATÉRIEL : M.S
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 1.72 kg

RESERVED SPACE FOR CONTRO... COPY

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE
© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **GRIPPING ASSEMBLY PLATE**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
90.17 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. N.A. | PART CLASS. B | HEAT TREATMENT N.A.

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006810	03005766	03002882	#	P23Y5B091050	00	1 : 2
14/05/2024	14/05/2024	14/05/2024	NET WEIGHT-Kg 1.72 kg			SHEET 2 OF 2

\\srv01102\E$\DM Uploading\2022-23\P23Y5\P23Y5B091050.dft