

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

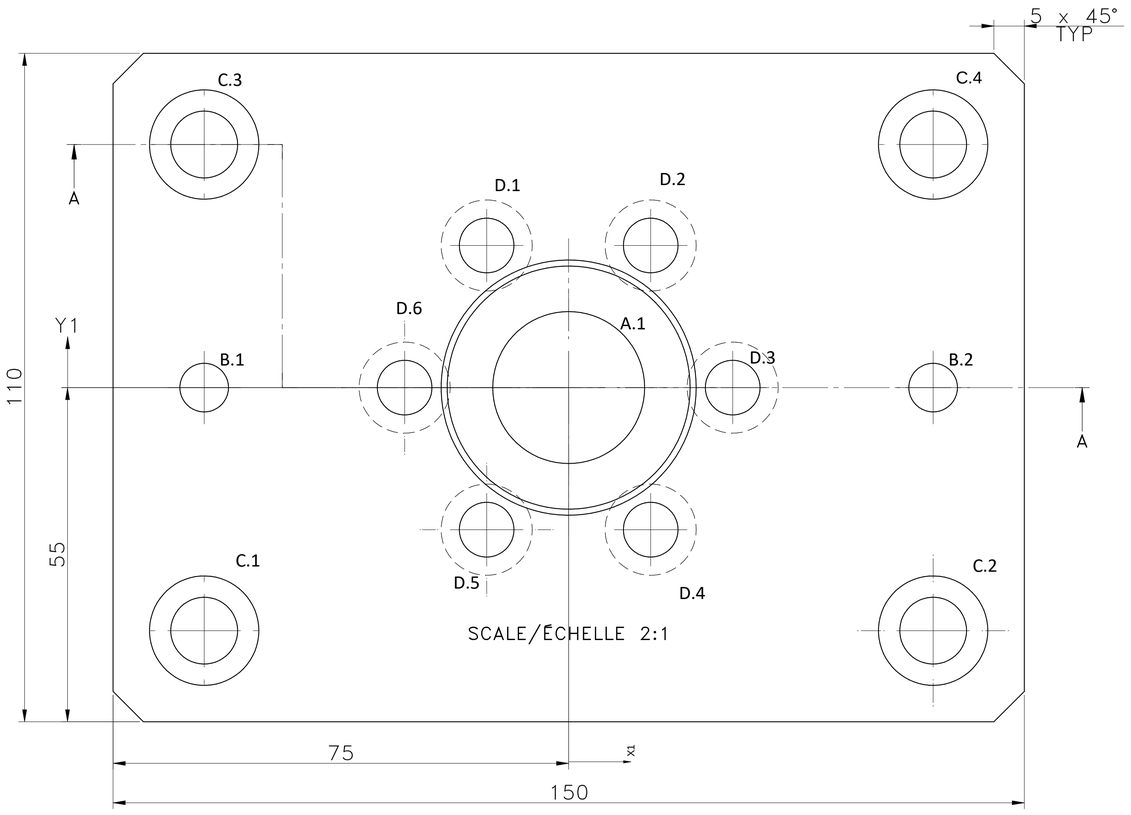


HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 25.00 mm THRU' C'BORE Ø 40.00 mm – 10.00 mm DEEP	REF SEC A–A
B.1	–60.00	0.00	Ø 8.00 mm THRU'	H7
B.2	60.00	0.00	Ø 8.00 mm THRU'	H7
C.1	–60.00	–40.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF SEC A–A
C.2	60.00	–40.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF SEC A–A
C.3	–60.00	40.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF SEC A–A
C.4	60.00	40.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF SEC A–A
D.1	–13.50	23.38	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC A–A
D.2	13.50	23.38	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC A–A
D.3	27.00	0.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC A–A
D.4	13.50	–23.38	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC A–A
D.5	–13.50	–23.38	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC A–A
D.6	–27.00	0.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC A–A

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D,
DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.1

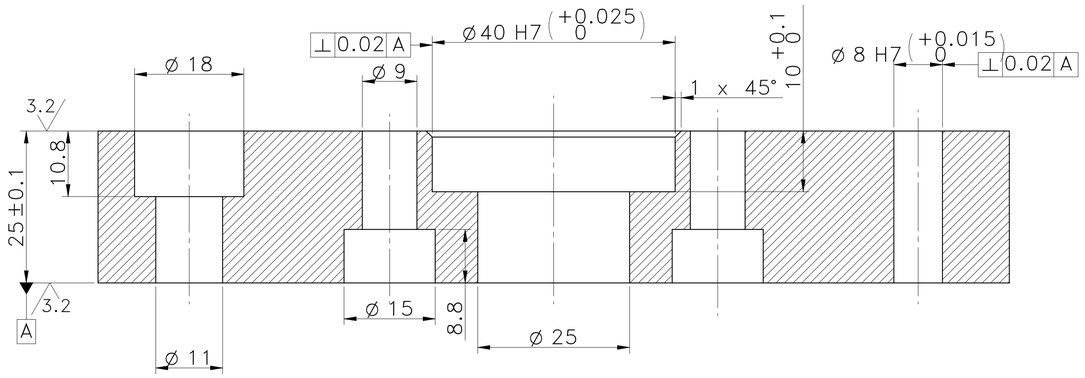

SECTION A–A
SCALE/ÉCHELLE 2:1



SCALE/ÉCHELLE 1:2

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET
LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING:
WEIGHT(Kg): 2.80 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES :
POIDS (Kg): 2.80 kg

RESERVED SPACE FOR CONTROL

CONTROLLED COPY

REVISION	DESCRIPTION	DATE	DRN.BY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

wipro PARI
www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

WIPRO PARI GROUP

DESCRIPTION: **PRESS MTG PLATE**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
87.05 in^2	#	#	WP1	0300	PL-02	A1

REFERENCE DWG.	---	PART CLASS. B	HEAT TREATMENT	---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006128	03004785	03002882	#	P23Y5B091101	00	1 : 1
11/05/2024	11/05/2024	11/05/2024	NET WEIGHT-Kg 2.80 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\SRV01102\E-DM Uploading\2022-23\P23Y5\P23Y5B091101.dft