

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00


HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm THRU'	H7
A.2	120.00	−30.00	Ø 6.00 mm THRU'	H7
B.1	−20.00	0.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	REF SEC A−A
B.2	−20.00	−30.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	REF SEC A−A
B.3	60.00	0.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	REF SEC A−A
B.4	60.00	−30.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	REF SEC A−A
B.5	140.00	0.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	REF SEC A−A
B.6	140.00	−30.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	REF SEC A−A
C.1	−0.50	−41.50	M5 THRU'	
C.2	−0.50	11.50	M5 THRU'	
C.3	39.50	11.50	M5 THRU'	
C.4	39.50	−41.50	M5 THRU'	
C.5	80.50	−41.50	M5 THRU'	
C.6	80.50	11.50	M5 THRU'	
C.7	120.50	11.50	M5 THRU'	
C.8	120.50	−41.50	M5 THRU'	
C.9	−18.00	34.00	M5 THRU'	
C.10	7.00	34.00	M5 THRU'	

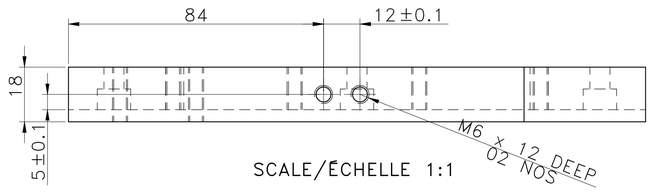


SCALE/ÉCHELLE 1:1



SECTION A−A
SCALE/ÉCHELLE 1:1

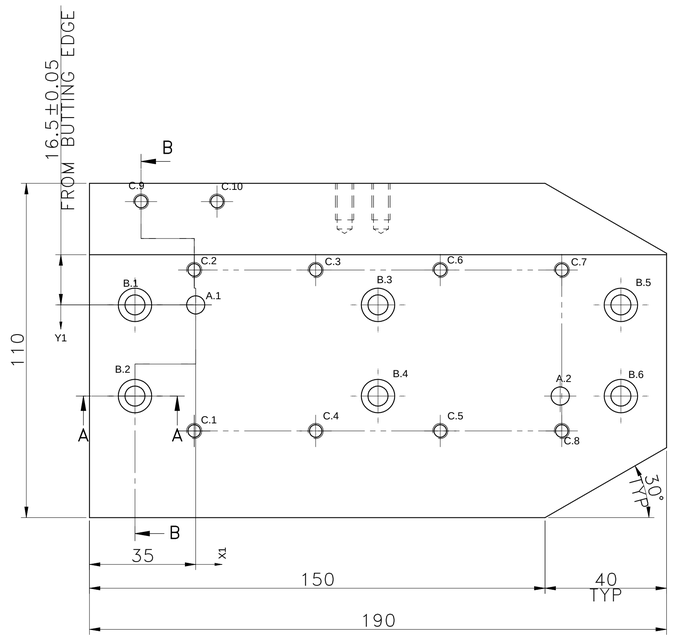


SCALE/ÉCHELLE 1:1

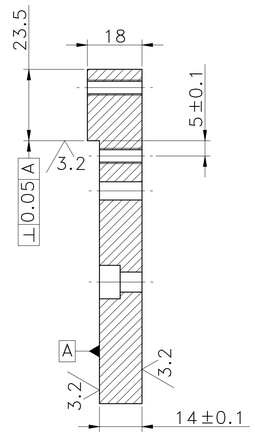

SECTION B−B
SCALE/ÉCHELLE 1:1

TOLERANCE NOTE :− (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/− 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/− 0.1

NOTE DE TOLERANCE :− (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/− 0.02 / IT7
2) TOUT TROU ET CONTRE−ALÉSAGE C.D,
DOIT ÊTRE CONTRÔLÉ SOUS +/− 0.1



SCALE/ÉCHELLE 1:2

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 2.25 kg

NOTE :−(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 2.25 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR COMMENTS

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°
UNSPECIFIED TOL.(F&B) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(F&B) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.
.	.	.	.

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: **SLIDING PLATE**

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
83.64 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006128	03004785	03002882	#	P23Y5B091108	00	1 : 1
14/05/2024	14/05/2024	14/05/2024	NET WEIGHT-Kg 2.25 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\SRV0102\E:\DM Uploading\2022-23\P23Y5\P23Y5B091108.dft