

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

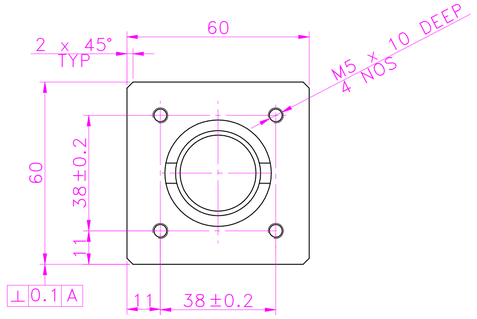


SCALE/ÉCHELLE 1:1




SECTION B–B
SCALE/ÉCHELLE 1:1


HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm x 10.00 mm DEEP	H7
A.2	30.00	0.00	Ø 6.00 mm x 10.00 mm DEEP	H7
B.1	−7.00	26.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF SEC B–B
B.2	37.00	26.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF SEC B–B
B.3	37.00	−31.50	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF SEC B–B
B.4	−7.00	−31.50	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF SEC B–B




SCALE/ÉCHELLE 1:2




SCALE/ÉCHELLE 1:2

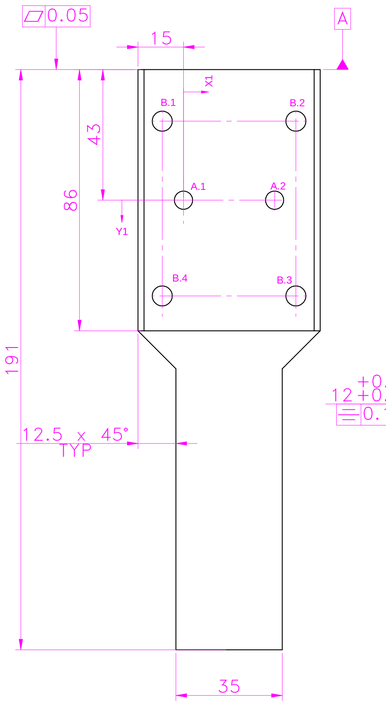


SCALE/ÉCHELLE 1:1

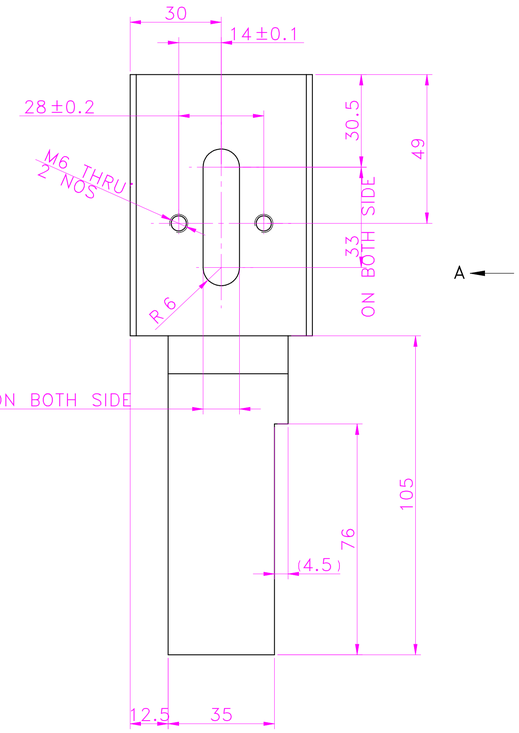

SCALE/ÉCHELLE 1:1

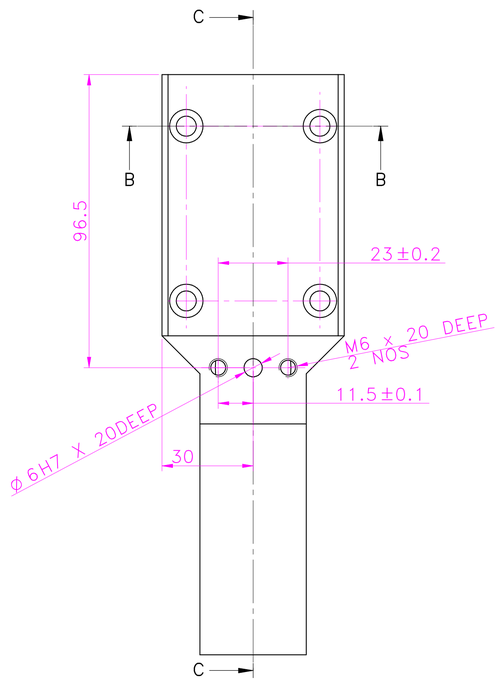

VIEW A
SCALE/ÉCHELLE 1:1

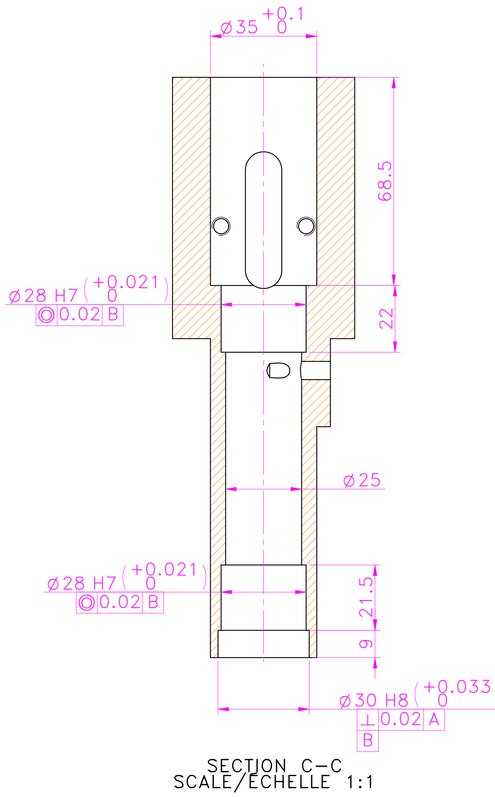

SECTION C–C
SCALE/ÉCHELLE 1:1

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D.
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D.
DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.1

NOTE : (English)
MATERIAL: C45
FINISH: IZBP
MACHINING: 3.2
WEIGHT(Kg): 2.26 kg

NOTE :–(French)
MATÉRIEL : C45
FINITION : IZBP
MACHINES : 3.2
POIDS (Kg): 2.26 kg

CNC MACHINING NOTE :– (English)
1) TO BE MACHINED BY 3D CAD DATA.

NOTE POUR MACHINES CNC :– (French)
1) À USINER À PARTIR DES DONNÉES CAD 3D.

HEAT TREATMENT :–(English)
1) TO BE TOUGHENED UPTO 28–32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

TRAITEMENT DE CHALEUR :–(French)
1) À RENFORCER JUSQUDÀ 28–32 HRC.
2) RE–TARAUDAGE À FAIRE APRÈS TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (SOIL Y A LIEU)

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: CYLINDER MTG BLOCK

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT : ASK TEAM MEMBER
LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
104.25 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. P2011-0150-02-027 | PART CLASS. B | HEAT TREATMENT | REF NOTE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
02006920	03004785	03002882	#	P23Y5B093007	00	1 : 1
10/05/2024	10/05/2024	10/05/2024	NET WEIGHT-Kg 2.26 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

CONTROLLED COPY

\\srv01043\E:\eDM Uploading\2022-23\P2375\P2375B093007.dft