


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

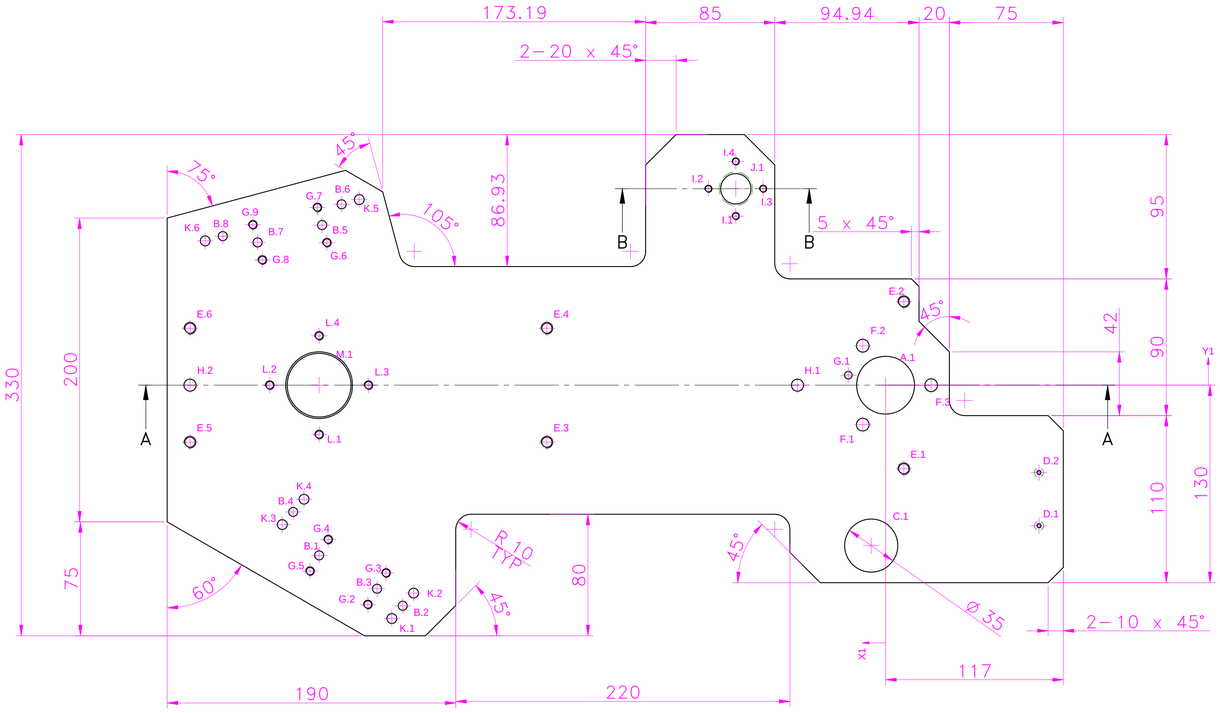


T.V
SCALE/ÉCHELLE 1:2




SECTION B–B
SCALE/ÉCHELLE 1:2

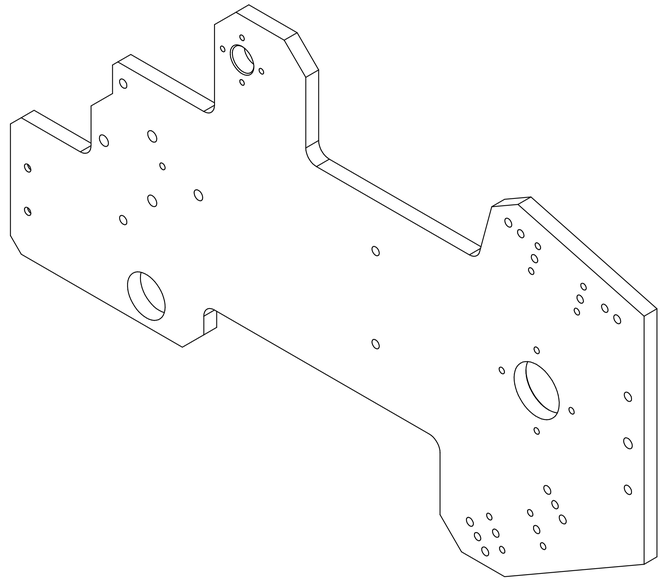

SCALE/ÉCHELLE 1:2

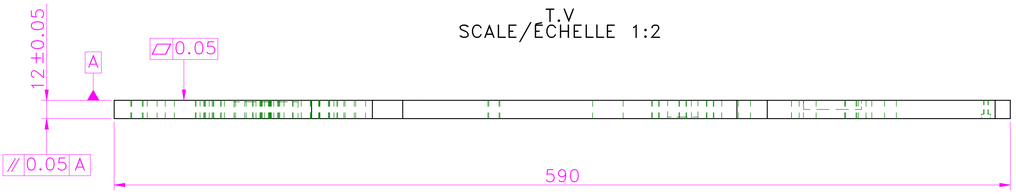

F.V
SCALE/ÉCHELLE 1:2



SECTION A–A
SCALE/ÉCHELLE 1:2

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: M.S.
FINISH: IZBP
MACHINING: 3.2
WEIGHT(Kg): 10.81 kg

NOTE :-(French)
MATÉRIEL : M.S.
FINITION : IZBP
MACHINES : 3.2
POIDS (Kg): 10.81 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: MOUNTING PLATE
DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
414.51 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. P2011015002021 | PART CLASS. B | HEAT TREATMENT NA

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
02006920	03004785	03002882	#	P23Y5B093013	00	1 : 2
09/05/2024	09/05/2024	09/05/2024	NET WEIGHT-Kg 10.81 kg			SHEET 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\Edm Uploading\2022-23\P23Y5\P23Y5B093013.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00		H7 HOLE REF SEC A–A
B.1	–373.00	–112.00	Ø 6.00 mm THRU'	H7
B.2	–317.94	–145.23	Ø 6.00 mm THRU'	H7
B.3	–334.89	–134.00	Ø 6.00 mm THRU'	H7
B.4	–390.08	–83.42	Ø 6.00 mm THRU'	H7
B.5	–371.00	105.39	Ø 6.00 mm THRU'	H7
B.6	–358.17	119.07	Ø 6.00 mm THRU'	H7
B.7	–413.50	94.00	Ø 6.00 mm THRU'	H7
B.8	–436.41	98.11	Ø 6.00 mm THRU'	H7
C.1	–9.48	–105.59		REF T.V.
D.1	101.00	–92.50	M3 THRU'	
D.2	101.00	–57.50	M3 THRU'	
E.1	12.00	–55.00	M8 THRU'	
E.2	12.00	55.00	M8 THRU'	
E.3	–223.00	–37.50	M8 THRU'	
E.4	–223.00	37.50	M8 THRU'	
E.5	–458.00	–37.50	M8 THRU'	
E.6	–458.00	37.50	M8 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
F.1	–15.00	–25.98	Ø 8.40 mm THRU'	
F.2	–15.00	25.98	Ø 8.40 mm THRU'	
F.3	30.00	0.00	Ø 8.40 mm THRU'	
G.1	–24.53	6.57	Ø 5.00 mm THRU'	H7
G.2	–340.89	–144.39	M6 THRU'	
G.3	–328.89	–123.61	M6 THRU'	
G.4	–367.00	–101.61	M6 THRU'	
G.5	–379.00	–122.39	M6 THRU'	
G.6	–367.89	93.80	M6 THRU'	
G.7	–374.11	116.98	M6 THRU'	
G.8	–410.39	82.41	M6 THRU'	
G.9	–416.61	105.59	M6 THRU'	
H.1	–58.00	0.00	Ø 8.00 mm THRU'	H7
H.2	–458.00	0.00	Ø 8.00 mm THRU'	H7
I.1	–98.64	111.30	M5 THRU'	
I.2	–116.64	129.30	M5 THRU'	
I.3	–80.64	129.30	M5 THRU'	
I.4	–98.64	147.30	M5 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
J.1	–98.64	129.30		H7 HOLE REF SEC B–B
K.1	–325.10	–153.59	Ø 6.50 mm THRU'	
K.2	–310.78	–136.88	Ø 6.50 mm THRU'	
K.3	–397.24	–91.77	Ø 6.50 mm THRU'	
K.4	–382.92	–75.07	Ø 6.50 mm THRU'	
K.5	–346.58	122.18	Ø 6.50 mm THRU'	
K.6	–448.00	95.00	Ø 6.50 mm THRU'	
L.1	–373.00	–32.50	M6 THRU'	
L.2	–405.50	0.00	M6 THRU'	
L.3	–340.50	0.00	M6 THRU'	
L.4	–373.00	32.50	M6 THRU'	
M.1	–373.00	0.00		H7 HOLE REF SEC A–A

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D.
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D.
DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.1

NOTE : (English)
MATERIAL: M.S.
FINISH: IZBP
MACHINING: 3.2
WEIGHT(Kg): 10.81 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : IZBP
MACHINES : 3.2
POIDS (Kg): 10.81 kg

RESERVED SPACE FOR CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(KAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(KAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: MOUNTING PLATE

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
414.51 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. P2011015002021 | PART CLASS. B | HEAT TREATMENT NA

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
02006920	03004785	03002882	#
09/05/2024	09/05/2024	09/05/2024	NET WEIGHT-Kg 10.81 kg

DRG./PART CODE: P23Y5B093013 | REV.: 00 | SCALE: 1 : 2 | SHEET: 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\Ars01043\E-drive Uploading\2022-23\P23Y5\P23Y5B093013.dft