


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

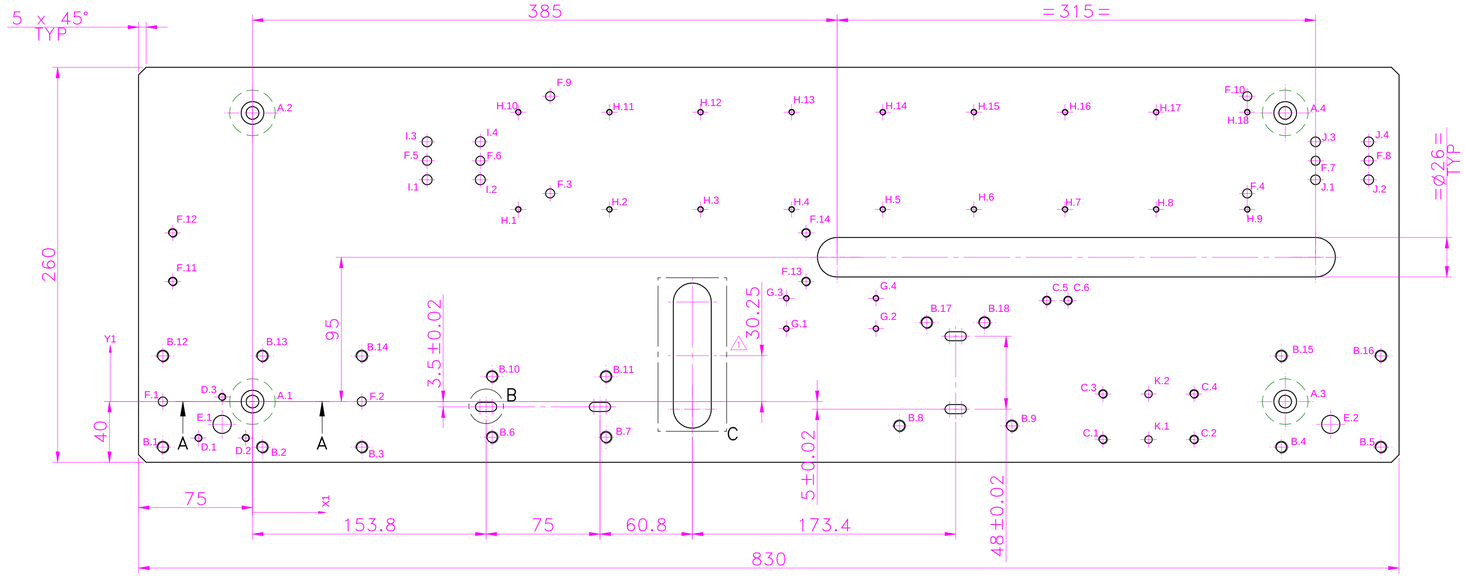


SCALE/ECHELLE 1:2

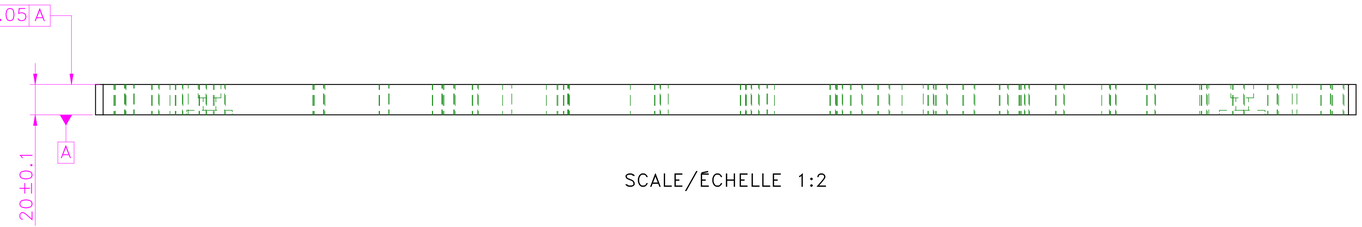


SCALE/ECHELLE 1:2



DETAIL B
@04 PLACES
SCALE/ECHELLE 2:1

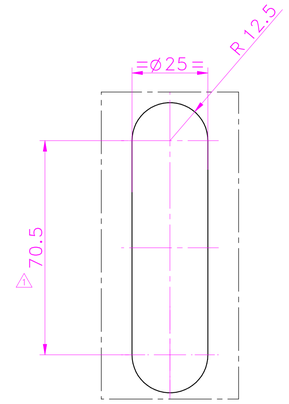

DETAIL C
SCALE/ECHELLE 1:1

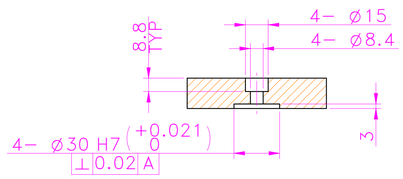

SECTION A–A
SCALE/ECHELLE 1:2

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE– USE THREAD INSERTS FOR ALL TAPPING

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : (English)
MATERIAL: Aluminum, 7075–T6
FINISH: SELF–ANODIZING
MACHINING:
WEIGHT(Kg): 11.28 kg

NOTE :–(French)
MATÉRIEL : Aluminum, 7075–T6
FINITION : SELF–ANODIZING
MACHINES :
POIDS (Kg): 11.28 kg

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP RADII 0.5 R	UNSP CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
1	CUTOUT INCREASED	14/02/2025	03006810

WIPRO PARI GROUP
www.wipropari.com
DESCRIPTION: SHIM VERIFICATION BASE PLATE
DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
772.56 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. --- PART CLASS. B HEAT TREATMENT ----

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006330	03004785	03002882	#	P23Y5B096021	01	1 : 2
14/02/2025	14/02/2025	14/02/2025	NET WEIGHT-Kg 11.28 kg			SHEET 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

\\srv01043\E:\Uploading\2022--23\P23Y5\P23Y5B096021.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 30.00 mm x 3.00 mm DEEP	H7– REF SEC A–A
A.2	0.00	190.00	Ø 30.00 mm x 3.00 mm DEEP	H7– REF SEC A–A
A.3	680.00	0.00	Ø 30.00 mm x 3.00 mm DEEP	H7– REF SEC A–A
A.4	680.00	190.00	Ø 30.00 mm x 3.00 mm DEEP	H7– REF SEC A–A
B.1	–59.00	–30.00	M8 x 50.80 mm DEEP	
B.2	6.50	–30.00	M8 x 50.80 mm DEEP	
B.3	72.00	–30.00	M8 x 50.80 mm DEEP	
B.4	677.50	–30.00	M8 x 50.80 mm DEEP	
B.5	743.00	–30.00	M8 x 50.80 mm DEEP	
B.6	157.80	–23.50	M8 THRU'	
B.7	232.80	–23.50	M8 THRU'	
B.8	426.00	–16.00	M8 THRU'	
B.9	500.00	–16.00	M8 THRU'	
B.10	157.80	16.50	M8 THRU'	
B.11	232.80	16.50	M8 THRU'	
B.12	–59.00	30.00	M8 x 50.80 mm DEEP	
B.13	6.50	30.00	M8 x 50.80 mm DEEP	
B.14	72.00	30.00	M8 x 50.80 mm DEEP	
B.15	677.50	30.00	M8 x 50.80 mm DEEP	
B.16	743.00	30.00	M8 x 50.80 mm DEEP	
B.17	444.00	52.00	M8 THRU'	
B.18	482.00	52.00	M8 THRU'	
C.1	560.00	–25.00	M6 THRU'	
C.2	620.00	–25.00	M6 THRU'	
C.3	560.00	5.00	M6 THRU'	
C.4	620.00	5.00	M6 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
C.5	523.00	66.50	M6 THRU'	
C.6	537.00	66.50	M6 THRU'	
D.1	–35.59	–24.00	M5 THRU'	
D.2	–4.41	–24.00	M5 THRU'	
D.3	–20.00	3.00	M5 THRU'	
E.1	–20.00	–15.00	Ø 12.00 mm THRU'	
E.2	710.00	–15.00	Ø 12.00 mm THRU'	
F.1	–59.00	0.00	Ø 6.00 mm THRU'	H7
F.2	72.00	0.00	Ø 6.00 mm THRU'	H7
F.3	196.00	137.00	Ø 6.00 mm THRU'	H7
F.4	655.00	137.00	Ø 6.00 mm THRU'	H7
F.5	115.00	158.50	Ø 6.00 mm THRU'	H7
F.6	150.00	158.50	Ø 6.00 mm THRU'	H7
F.7	700.00	158.50	Ø 6.00 mm THRU'	H7
F.8	735.00	158.50	Ø 6.00 mm THRU'	H7
F.9	196.00	201.00	Ø 6.00 mm THRU'	H7
F.10	655.00	201.00	Ø 6.00 mm THRU'	H7
G.1	351.50	48.00	M4 THRU'	
G.2	410.50	48.00	M4 THRU'	
G.3	351.50	68.00	M4 THRU'	
G.4	410.50	68.00	M4 THRU'	
H.1	175.00	126.50	M4 THRU'	
H.2	235.00	126.50	M4 THRU'	
H.3	295.00	126.50	M4 THRU'	
H.4	355.00	126.50	M4 THRU'	
H.5	415.00	126.50	M4 THRU'	
H.6	475.00	126.50	M4 THRU'	
H.7	535.00	126.50	M4 THRU'	
H.8	595.00	126.50	M4 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
H.9	655.00	126.50	M4 THRU'	
H.10	175.00	190.50	M4 THRU'	
H.11	235.00	190.50	M4 THRU'	
H.12	295.00	190.50	M4 THRU'	
H.13	355.00	190.50	M4 THRU'	
H.14	415.00	190.50	M4 THRU'	
H.15	475.00	190.50	M4 THRU'	
H.16	535.00	190.50	M4 THRU'	
H.17	595.00	190.50	M4 THRU'	
H.18	655.00	190.50	M4 THRU'	
I.1	115.00	146.00	Ø 6.60 mm THRU'	
I.2	150.00	146.00	Ø 6.60 mm THRU'	
I.3	115.00	171.00	Ø 6.60 mm THRU'	
I.4	150.00	171.00	Ø 6.60 mm THRU'	
J.1	700.00	146.00	Ø 6.40 mm THRU'	
J.2	735.00	146.00	Ø 6.40 mm THRU'	
J.3	700.00	171.00	Ø 6.40 mm THRU'	
J.4	735.00	171.00	Ø 6.40 mm THRU'	
K.1	590.00	–25.00	Ø 5.00 mm THRU'	H7
K.2	590.00	5.00	Ø 5.00 mm THRU'	H7
F.11	–52.50	79.00	M6 THRU'	
F.12	–52.50	111.00	M6 THRU'	
F.13	364.50	79.00	M6 THRU'	
F.14	364.50	111.00	M6 THRU'	

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES TAP & COUNTER BORE C.D. SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALESAGE C.D. DOIT ÊTRE CONTROLÉ SOUS +/– 0.1

NOTE : (English)
MATERIAL: Aluminum, 7075–T6
FINISH: SELF–ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 11.28 kg

NOTE :–(French)
MATÉRIEL : Aluminum, 7075–T6
FINITION : SELF–ANODIZING
MACHINES : 3.2
POIDS (Kg): 11.28 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
	CUTOUT INCREASED	14/02/2025	03006810

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION							
SHIM VERIFICATION BASE PLATE						DRAWING TYPE: MACHINING	
SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE	
772.56 in^2	#	#	WPES	0300	PL-02	A1	
REFERENCE DWG.	—	PART CLASS. B	HEAT TREATMENT	—			
DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE	
03006330	03004785	03002882	#	P23Y5B096021	01	1 : 2	
14/02/2025	14/02/2025	14/02/2025	NET WEIGHT-Kg 11.28 kg			SHEET 2 OF 2	

\\srv01043\E:\dtw Uploading\2022-23\P23Y5\P23Y5B096021.dft