


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

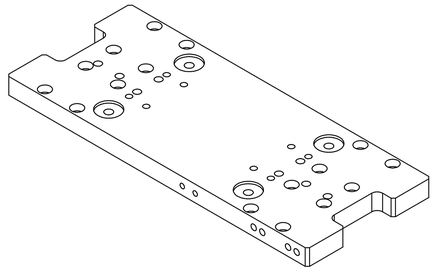


SCALE/ÉCHELLE 1:2

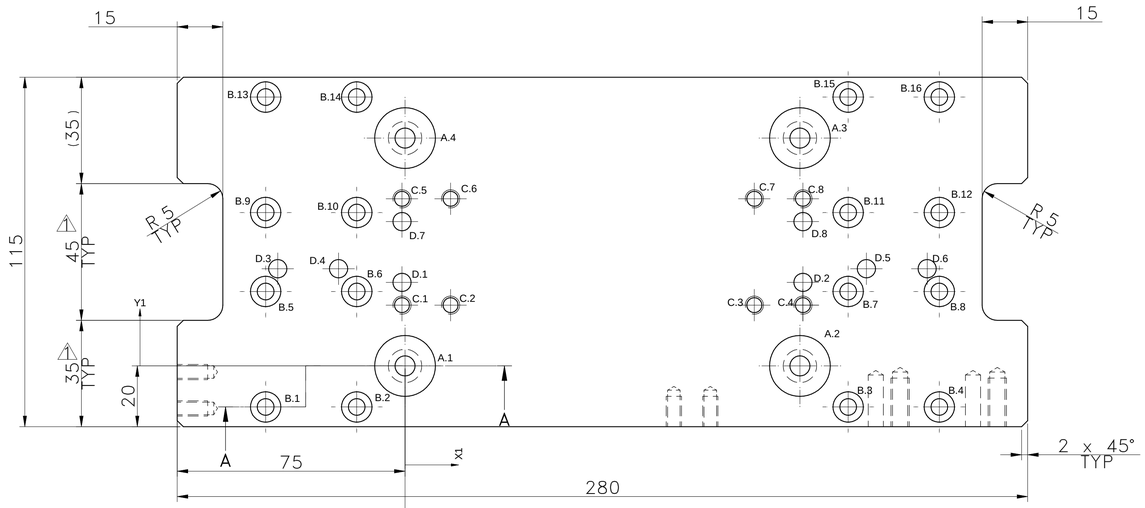


SCALE/ÉCHELLE 1:1

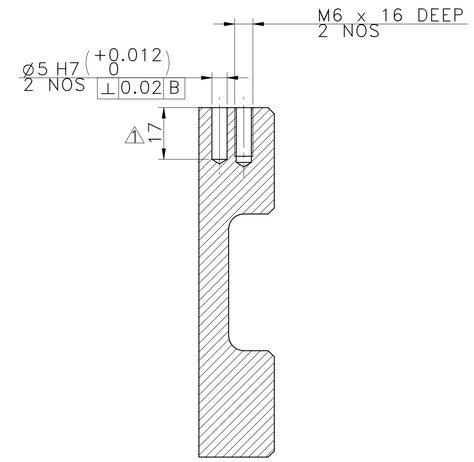


SECTION B–B
SCALE/ÉCHELLE 1:1

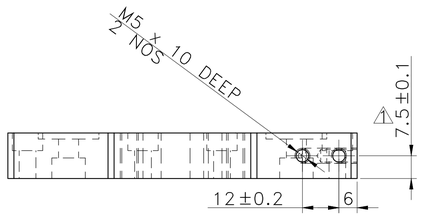

SCALE/ÉCHELLE 1:1

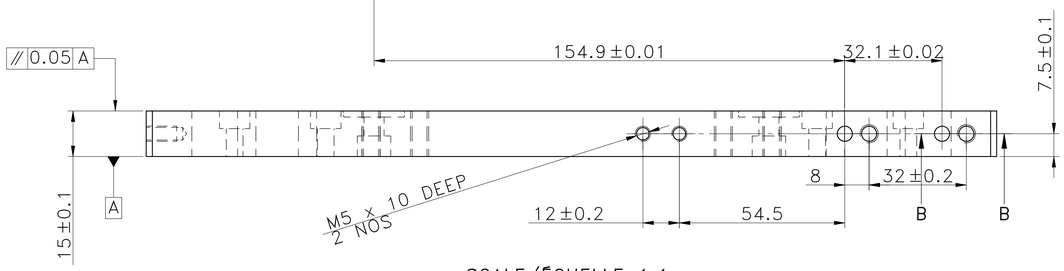

SCALE/ÉCHELLE 1:1

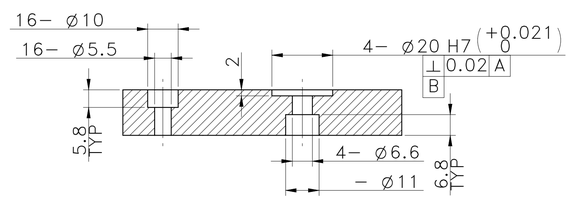

SECTION A–A
SCALE/ÉCHELLE 1:1

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE– USE THREAD INSERTS FOR ALL TAPPING

NOTE : (English)
MATERIAL: Aluminum, 7075–T6
FINISH: SELF–ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 1.23 kg

NOTE :–(French)
MATÉRIEL : Aluminum, 7075–T6
FINITION : SELF–ANODIZING
MACHINES : 3.2
POIDS (Kg): 1.23 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP RADII 0.5 R	UNSP CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
1	DIMENSION ADDED & DIMENSION CORRECTED	13/12/2024	03006330

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: SLIDE PLATE

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
132.80 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. -- | PART CLASS. B | HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006330	03004785	03002882	#
13/12/2024	13/12/2024	13/12/2024	NET WEIGHT-Kg 1.23 kg

DRG./PART CODE: P23Y5B096023 | REV.: 01 | SCALE: 1 : 1 | SHEET: 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E,D&M Uploading\2022--23\P23Y5\P23Y5B096023.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 20.00 mm x 2.00 mm DEEP	H7– REF SEC A–A
A.2	130.00	0.00	Ø 20.00 mm x 2.00 mm DEEP	H7– REF SEC A–A
A.3	130.00	75.00	Ø 20.00 mm x 2.00 mm DEEP	H7– REF SEC A–A
A.4	0.00	75.00	Ø 20.00 mm x 2.00 mm DEEP	H7– REF SEC A–A
B.1	–45.90	–13.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.2	–15.90	–13.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.3	145.90	–13.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.4	175.90	–13.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.5	–45.90	24.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.6	–15.90	24.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.7	145.90	24.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.8	175.90	24.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.9	–45.90	50.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.10	–15.90	50.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.11	145.90	50.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A

HOLE TABLE				
Hole	X	Y	Size	REMARK
B.12	175.90	50.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.13	–45.90	88.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.14	–15.90	88.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.15	145.90	88.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
B.16	175.90	88.50	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF SEC A–A
C.1	–1.00	20.00	M6 THRU'	
C.2	15.00	20.00	M6 THRU'	
C.3	115.00	20.00	M6 THRU'	
C.4	131.00	20.00	M6 THRU'	
C.5	–1.00	55.00	M6 THRU'	
C.6	15.00	55.00	M6 THRU'	
C.7	115.00	55.00	M6 THRU'	
C.8	131.00	55.00	M6 THRU'	H7
D.1	–1.00	27.50	Ø 6.00 mm THRU'	H7
D.2	131.00	27.50	Ø 6.00 mm THRU'	H7
D.3	–41.90	32.00	Ø 6.00 mm THRU'	H7
D.4	–21.90	32.00	Ø 6.00 mm THRU'	H7
D.5	151.90	32.00	Ø 6.00 mm THRU'	H7
D.6	171.90	32.00	Ø 6.00 mm THRU'	H7
D.7	–1.00	47.50	Ø 6.00 mm THRU'	H7
D.8	131.00	47.50	Ø 6.00 mm THRU'	H7

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D,
DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.1

NOTE : (English)
MATERIAL: Aluminum, 7075–T6
FINISH: SELF–ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 1.23 kg

NOTE :–(French)
MATÉRIEL : Aluminum, 7075–T6
FINITION : SELF–ANODIZING
MACHINES : 3.2
POIDS (Kg): 1.23 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR CONTROL

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
	DIMENSION ADDED & DIMENSION CORRECTED	13/12/2024	03006330

WIPRO PARI GROUP
www.wipropari.com

DESCRIPTION: SLIDE PLATE
DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
4.LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
132.80 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	–	PART CLASS.	B	HEAT TREATMENT	---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006330	03004785	03002882	#
13/12/2024	13/12/2024	13/12/2024	NET WEIGHT-Kg 1.23 kg

DRG./PART CODE: P23Y5B096023
REV.: 01
SCALE: 1 : 1
SHEET: 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\Exchange Uploading\2022-23\P23Y5\P23Y5B096023.dft