

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

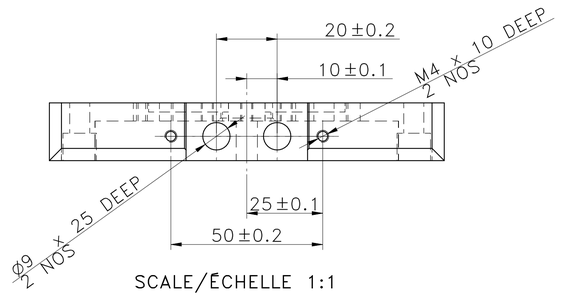


SCALE/ÉCHELLE 1:1

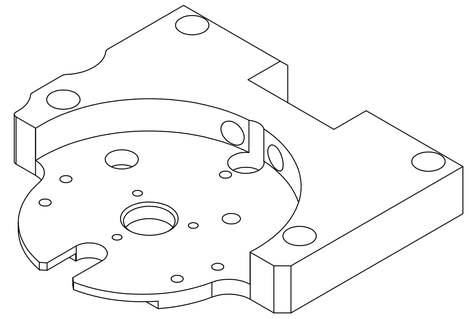


SCALE/ÉCHELLE 1:1

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 17.00 mm THRU'	REF SEC B–B
B.1	–55.00	15.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 9.00 mm DEEP	H7– REF SEC A–A
B.2	55.00	15.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 9.00 mm DEEP	H7– REF SEC A–A
C.1	–30.31	17.50	M12 x 1 THRU'	
D.1	–30.74	–17.75	Ø 4.00 mm THRU'	H7– REF SEC B–B
D.2	–35.33	–3.47	Ø 4.00 mm THRU'	H7– REF SEC B–B
D.3	30.74	–17.75	Ø 4.00 mm THRU'	H7– REF SEC B–B
D.4	35.33	–3.47	Ø 4.00 mm THRU'	H7– REF SEC B–B
D.5	0.00	35.50	Ø 4.00 mm THRU'	H7– REF SEC B–B
E.1	0.00	–15.00	M4 THRU'	
E.2	–12.99	7.50	M4 THRU'	
E.3	12.99	7.50	M4 THRU'	
F.1	19.09	19.09	Ø 6.00 mm THRU'	H7– REF SEC B–B
G.1	0.00	45.00	Ø 12.00 mm THRU'	H7

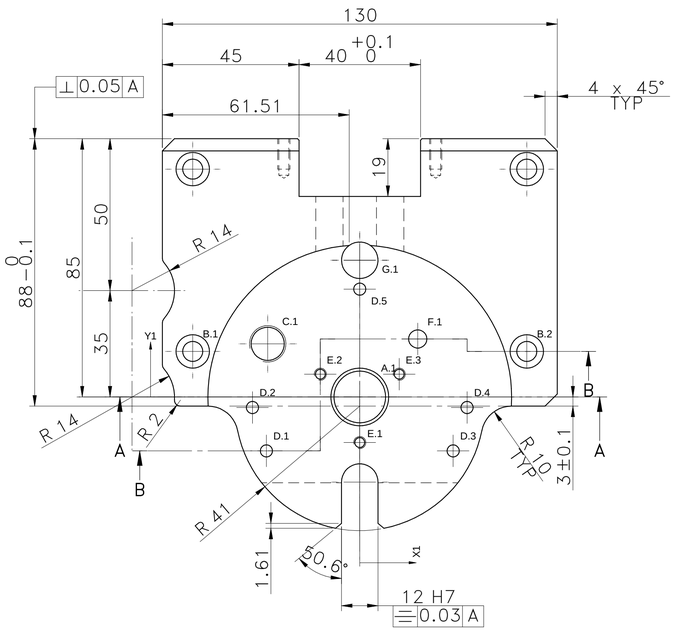

SCALE/ÉCHELLE 1:1

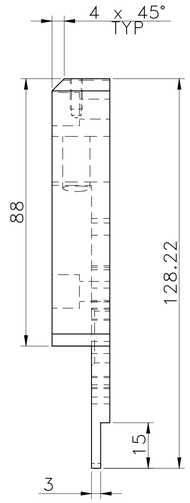


SCALE/ÉCHELLE 1:1

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/– 0.1


NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALESAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/– 0.1

HEAT TREATMENT NOTE :– (English)
1) TO BE CASE HARDENED UPTO 56~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT
AT SUPPLIER END.(IF APPLICABLE)

NOTE POUR LE TRAITEMENT DE LA CHALEUR :–(French)
1) À ENDURCIR JUSQUOA 56~60 HRC.
2) PROFONDEUR DU TRAITEMENT 0.8 ~ 1.2MM.
3) MAINTENIR LES FILTAGES PROPRE
4) RE–TARAUDAGE A FAIRE APRÈS TRAITEMENT DE SURFACE
CHEZ LE FOURNISSEUR (SOIL Y A LIEU)

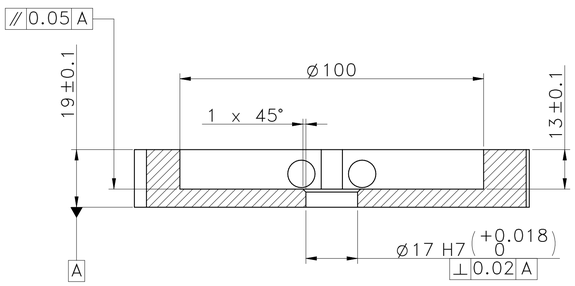

SECTION A–A
SCALE/ÉCHELLE 1:1

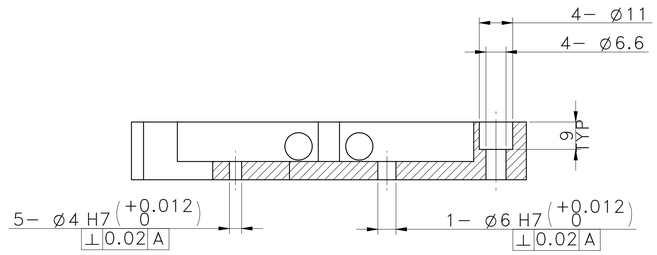

SECTION B–B
SCALE/ÉCHELLE 1:1

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

NOTE : (English)
MATERIAL: Steel – Alloyed:1.7147 , 20MnCr5
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2 (0.8)
WEIGHT(Kg): 1.15 kg

NOTE :–(French)
MATÉRIEL : Steel – Alloyed:1.7147 , 20MnCr5
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2 (0.8)
POIDS (Kg): 1.15 kg

RESERVED SPACE FOR
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

DESCRIPTION: **AP SHIM FIXTURE**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
60.12 in^2	#	#	WP1	0300		A1

REFERENCE DWG. ---
PART CLASS.
HEAT TREATMENT ---

LOCATION : PUNE	DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
	03006330	03004785	03002882	#	P23Y5B096025	00	1 :
	12/11/2024	12/11/2024	12/11/2024	NET WEIGHT-Kg 1.15 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\ExDW Uploading\2022--23\P23Y5\P23Y5B096025.dft