NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

NOTE T + S :- (English)

HEAT TREATMANT PROCESS:REF NOTE
HARDNESS & DEPTH : REF NOTE
FINISH & DEPTH :REF NOTE
TEST COUPON SIZE :ø78.75mm(20mmLENGTH-01NOS)
WELD CLASS : B IF APPLICABLE

MATERIAL TEST CERTIFICATE REPORT REQURIED
NON DESTRUCTIVE TESTING


RAW MATERIAL ULTRASONIC TEST	HEAT TREATMENT DIE PENETRATION TEST + ULTRASONIC TEST	FINISH COMPOMENT MAGNETIC PARTICLE INSPECTION

NOTE T + S :- (French)


PROCÉDÉ H.T. : REF NOTE
DURETÉ ET PROFONDEUR : REF NOTE
FINITION ET PROFONDEUR : REF NOTE
DIMENSION TEST COUPON :ø78.75mm(20mmLENGTH-01NOS)
CLASSE D'USINAGE : B IF APPLICABLE

RAPPORT DU CTM REQUIS
CONTRÔLE NON DESTRUCTIF


MATIÈRE PREMIÈRE TEST ULTRASONIQUE	TRAITEMENT DE LA CHALEUR TEST DE PÉNÉTRATION DE MATRICE + TEST ULTRASONIQUE	COMPOSANT DE FINITION INSPECTION MAGNÉTIQUE DES PARTICULES

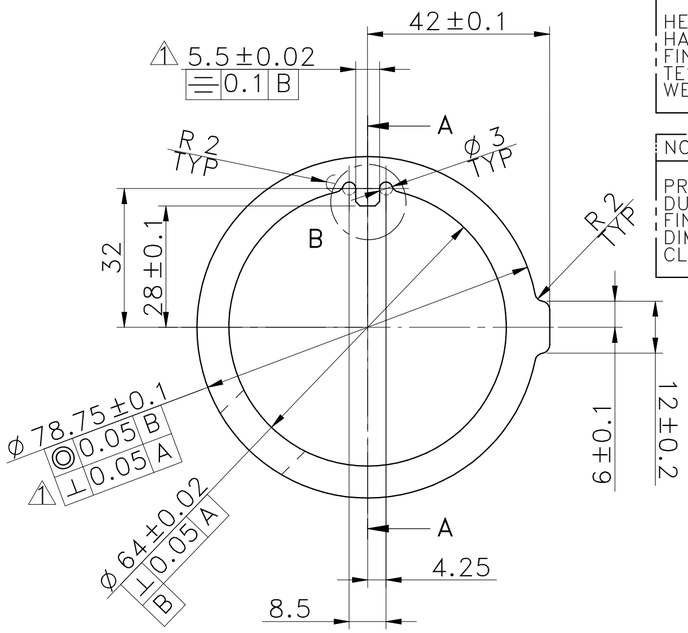


SCALE/ÉCHELLE 1:1



DETAIL B
SCALE/ÉCHELLE 2:1

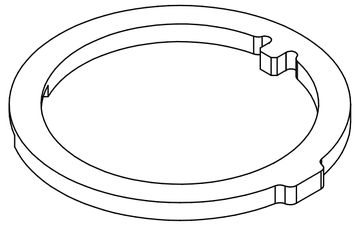


SCALE/ÉCHELLE 1:1




SCALE/ÉCHELLE 1:1

NOTE FOR D2 MATERIAL :-(English)
TO BE VACCUM HARDENED 55~60 HRC.

NOTE POUR LE MATÉRIEL D2: -(French)
A ENDURCIR SOUS VIDE 55~60 HRC.

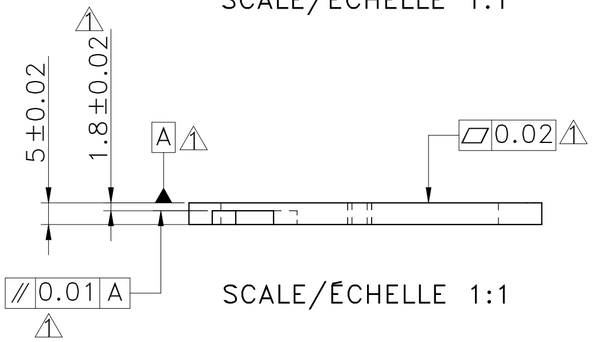

SCALE/ÉCHELLE 1:1

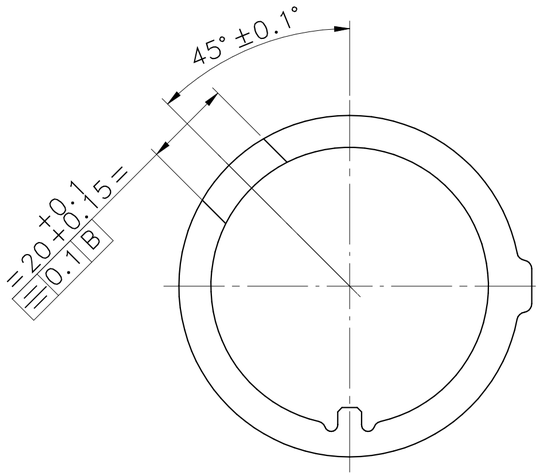

SCALE/ÉCHELLE 1:1

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: D2
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 0.06 kg

NOTE :-(French)
MATÉRIEL : D2
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 0.06 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
1	FLATNESS ADDED & TOLERANCE UPDATED	17/04/2025	03006330

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: MASTER B
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
8.72 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. --- PART CLASS. T+S HEAT TREATMENT ---

	DRN.BY	CHKD.BY	APPD.BY
	03006330	03004785	03002882
	17/04/2025	17/04/2025	17/04/2025

MATERIAL #
NET WEIGHT-Kg 0.06 kg

DRG./PART CODE: P23Y5B096057
REV.: 01
SCALE: 1 : 1
SHEET: 1 OF 1

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B096057.dft