


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

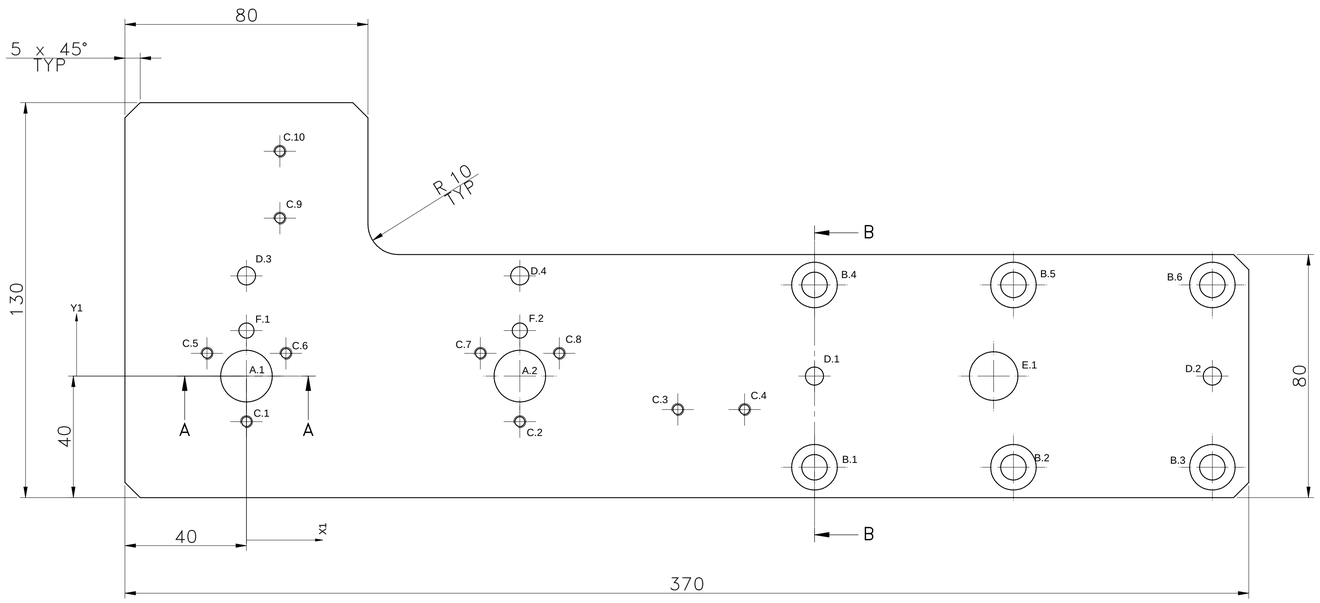


SCALE/ÉCHELLE 1:1

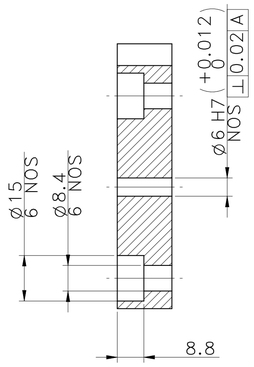


SECTION B–B
SCALE/ÉCHELLE 1:1

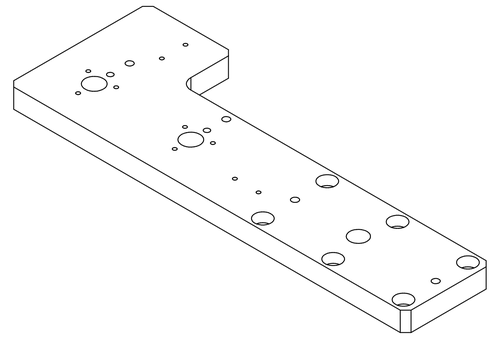

SCALE/ÉCHELLE 1:2

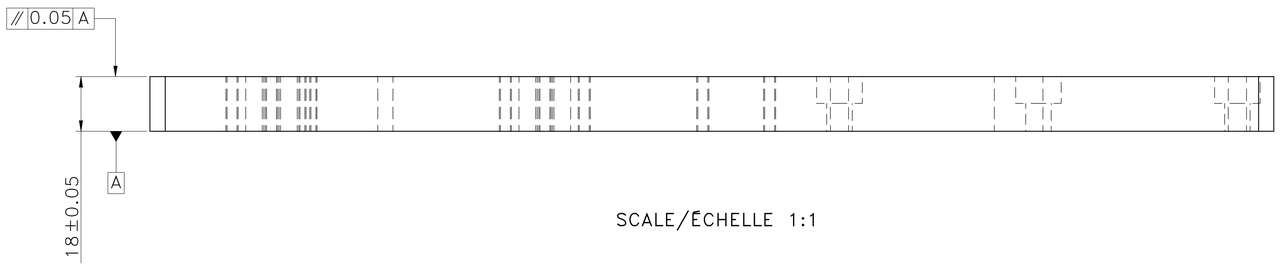

SCALE/ÉCHELLE 1:1

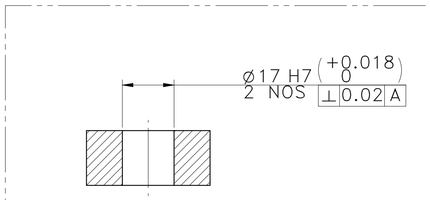

SECTION A–A
SCALE/ÉCHELLE 1:1

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 4.51 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 4.51 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°
UNSPECIFIED TOL (FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL (FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL (MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL (MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

WIPRO PARI GROUP

DESCRIPTION: **MASTER MTG PLATE**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
143.93 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. ---
PART CLASS. B
HEAT TREATMENT ----
LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL #	DRG./PART CODE	REV.	SCALE
03006330	03004785	03002882	NET WEIGHT-Kg 4.51 kg	P23Y5B096058	00	1 : -
12/11/2024	12/11/2024	12/11/2024				SHEET 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E-drive Uploading\2022-23\P23Y5\P23Y5B096058.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 17.00 mm THRU'	H7– REF SEC A–A
A.2	90.00	0.00	Ø 17.00 mm THRU'	H7– REF SEC A–A
B.1	187.00	–30.00	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC B–B
B.2	252.50	–30.00	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC B–B
B.3	318.00	–30.00	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC B–B
B.4	187.00	30.00	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC B–B
B.5	252.50	30.00	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC B–B
B.6	318.00	30.00	Ø 8.40 mm THRU' C'BORE Ø 15.00 mm – 8.80 mm DEEP	REF SEC B–B
C.1	0.00	–15.00	M4 THRU'	
C.2	90.00	–15.00	M4 THRU'	
C.3	142.00	–11.00	M4 THRU'	
C.4	164.00	–11.00	M4 THRU'	
C.5	–12.99	7.50	M4 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
C.6	12.99	7.50	M4 THRU'	
C.7	77.01	7.50	M4 THRU'	
C.8	102.99	7.50	M4 THRU'	
C.9	11.00	52.00	M4 THRU'	
C.10	11.00	74.00	M4 THRU'	
D.1	187.00	0.00	Ø 6.00 mm THRU'	H7– REF SEC B–B
D.2	318.00	0.00	Ø 6.00 mm THRU'	H7– REF SEC B–B
D.3	0.00	33.00	Ø 6.00 mm THRU'	H7– REF SEC B–B
D.4	90.00	33.00	Ø 6.00 mm THRU'	H7– REF SEC B–B
E.1	246.00	0.00	Ø 16.00 mm THRU'	
F.1	0.00	15.00	Ø 5.00 mm THRU'	H7
F.2	90.00	15.00	Ø 5.00 mm THRU'	H7

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D.
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D.
DOIT ÊTRE CONTROLÉ SOUS +/– 0.1

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING:
WEIGHT(Kg): 4.51 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES :
POIDS (Kg): 4.51 kg

RESERVED SPACE FOR STAMP

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP RADII 0.5 R	UNSP CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wipropari.com

DESCRIPTION: MASTER MTG PLATE

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
143.93 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. --- PART CLASS. B HEAT TREATMENT ----

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006330	03004785	03002882	#	P23Y5B096058	00	1 :
12/11/2024	12/11/2024	12/11/2024	NET WEIGHT-Kg 4.51 kg			SHEET 2 OF 2

\\srv01043\E,D&M Uploading\2022-23\P23Y5\P23Y5B096058.dft