

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00



SCALE/ÉCHELLE 1:2

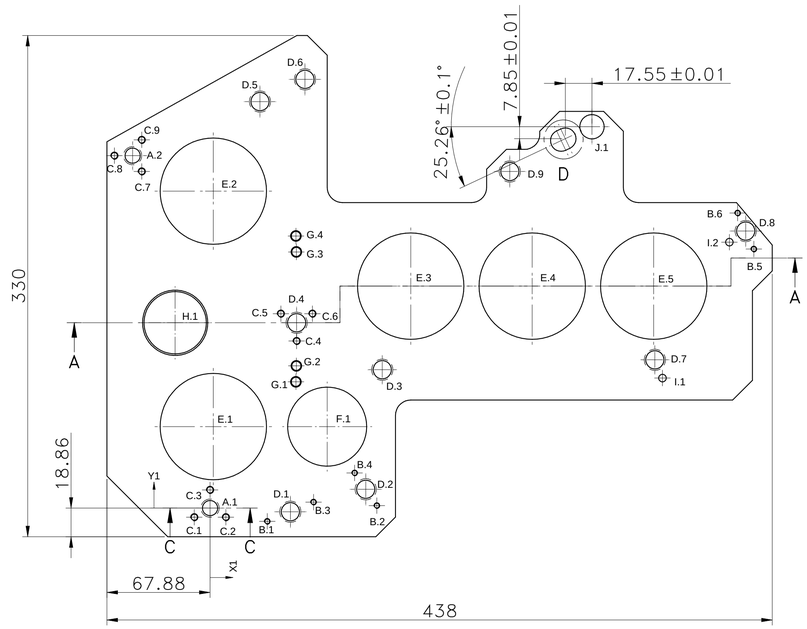


SCALE/ÉCHELLE 1:2

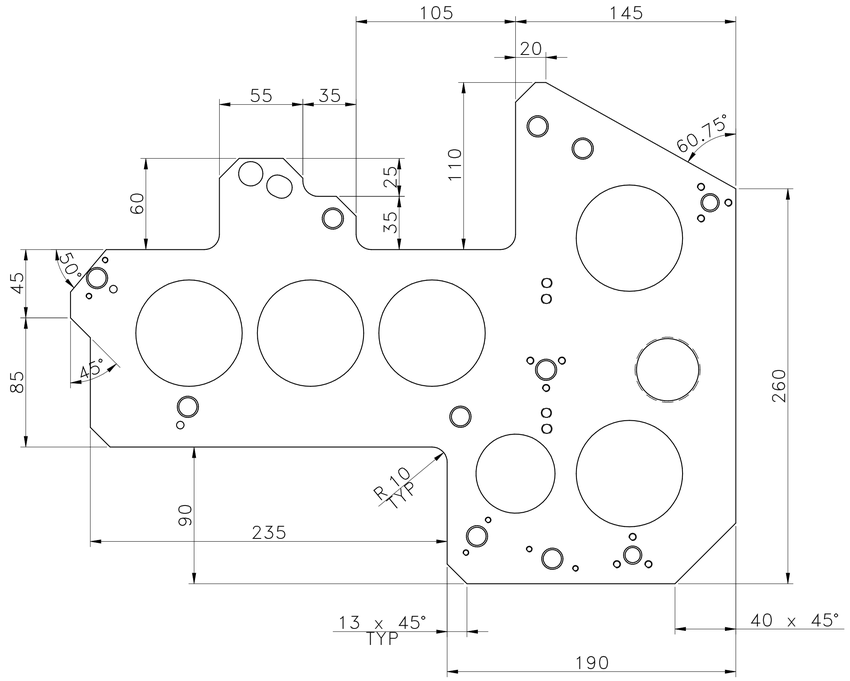


VIEW B
SCALE/ÉCHELLE 1:2


SECTION A–A
SCALE/ÉCHELLE 1:2



SECTION C–C
SCALE/ÉCHELLE 1:2



DETAIL D
SCALE/ÉCHELLE 1:1

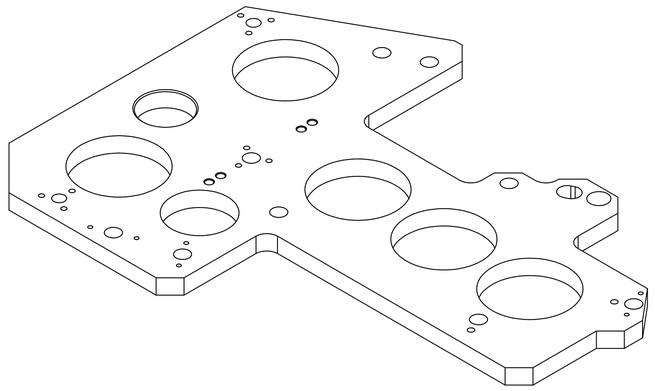

SCALE/ÉCHELLE 1:2

HEAT TREATMENT :–(English)
1) TO BE HARDENED UPTO 32–35 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

TRAITEMENT DE CHALEUR :– (French)
1) A RENFORCER JUSQUDA 32–35 HRC.
2) RE–TARAUDAGE A FAIRE APRÈS TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (SOIL Y A LIEU)

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: EN24
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2 (0.8)
WEIGHT(Kg): 6.91 kg

NOTE :–(French)
MATÉRIEL : EN24
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2 (0.8)
POIDS (Kg): 6.91 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

WIPRO PARI GROUP

DESCRIPTION: OP 1050 - ITEM 7
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
274.48 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. ---
PART CLASS. B
HEAT TREATMENT
REF NOTE
LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006751	03004785	03002882	#	P23Y5B099007	00	1 : 2
21/06/2024	21/06/2024	21/06/2024	NET WEIGHT-Kg 6.91 kg			SHEET 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E-doc Uploading\2022-23\P23Y5\P23Y5B099007.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 10.00 mm THRU'	REF SECTION C–C
A.2	–51.00	232.00	Ø 10.00 mm THRU'	REF SECTION C–C
B.1	37.65	–8.74	M4 THRU'	
B.2	109.80	1.65	M4 THRU'	
B.3	68.11	3.96	M4 THRU'	
B.4	95.18	23.15	M4 THRU'	
B.5	358.02	170.51	M4 THRU'	
B.6	347.36	194.23	M4 THRU'	
C.1	–10.39	–6.00	M5 THRU'	
C.2	10.39	–6.00	M5 THRU'	
C.3	0.00	12.00	M5 THRU'	
C.4	57.00	110.00	M5 THRU'	
C.5	46.61	128.00	M5 THRU'	
C.6	67.39	128.00	M5 THRU'	
C.7	–45.00	221.61	M5 THRU'	
C.8	–63.00	232.00	M5 THRU'	
C.9	–45.00	242.39	M5 THRU'	
D.1	52.88	–2.39	Ø 12.00 mm THRU'	REF SECTION A–A
D.2	102.49	12.40	Ø 12.00 mm THRU'	REF SECTION A–A
D.3	113.39	91.09	Ø 12.00 mm THRU'	REF SECTION A–A
D.4	57.00	122.00	Ø 12.00 mm THRU'	REF SECTION A–A
D.5	32.88	267.61	Ø 12.00 mm THRU'	REF SECTION A–A
D.6	62.50	282.24	Ø 12.00 mm THRU'	REF SECTION A–A
D.7	292.88	97.61	Ø 12.00 mm THRU'	REF SECTION A–A
D.8	352.69	182.37	Ø 12.00 mm THRU'	REF SECTION A–A

HOLE TABLE				
Hole	X	Y	Size	REMARK
D.9	197.39	221.59	Ø 12.00 mm THRU'	REF SECTION A–A
E.1	2.12	53.64	Ø 70.00 mm THRU'	
E.2	2.12	208.64	Ø 70.00 mm THRU'	
E.3	132.12	146.14	Ø 70.00 mm THRU'	
E.4	212.12	146.14	Ø 70.00 mm THRU'	
E.5	292.12	146.14	Ø 70.00 mm THRU'	
F.1	77.12	53.64	Ø 52.00 mm THRU'	
G.1	56.51	83.14	Ø 6.00 mm THRU'	H7
G.2	56.81	93.64	Ø 6.00 mm THRU'	H7
G.3	56.81	168.64	Ø 6.00 mm THRU'	H7
G.4	56.51	179.14	Ø 6.00 mm THRU'	H7
H.1	–23.00	122.00	Ø 41.00 mm THRU'	REF SECTION A–A
I.1	297.88	85.61	Ø 5.00 mm THRU'	H7
I.2	341.94	175.06	Ø 5.00 mm THRU'	H7
J.1	251.47	251.05	Ø 16.00 mm THRU'	H7

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALESAGE C.D,
DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.1

NOTE : (English)
MATERIAL: EN24
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2 (0.8)
WEIGHT(Kg): 6.91 kg

NOTE :–(French)
MATÉRIEL : EN24
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2 (0.8)
POIDS (Kg): 6.91 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADii 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wiropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

WIPRO PARI GROUP

DESCRIPTION: OP 1050 - ITEM 7

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
274.48 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	---	PART CLASS. B	HEAT TREATMENT	REF NOTE

LOCATION : PUNE	DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED	03006751	03004785	03002882	#	P23Y5B099007	00	1 : 2
	21/06/2024	21/06/2024	21/06/2024	NET WEIGHT-Kg 6.91 kg			SHEET 2 OF 2

\\srv01043\Ex0M Uploading\2022--23\P23Y5\P23Y5B099007.dft